



Passive 54v Gigabit Power-over-Ethernet Adapter

The EnGenius Passive 54v Gigabit PoE Adapter gives network administrators the flexibility to extend power to passive 54v PoE-compatible network devices in locations where power outlets may not be readily available, such as on ceilings or in crawl spaces, while also connecting them to the company network. By combining high-speed Gigabit and power over the same CAT5/6 cable, the EPA5006GP ensures maximum device performance.

The EnGenius Passive 54v Gigabit PoE Adapter supports high-speed data and up to 32.8-watts of power for Passive 54v-compatible devices, such as Access Points, IP Cameras or VoIP phones, up to 328-feet away over a single CAT5/6 cable for flexibility in deployment options.

Compact optimal port design provides easy, precise installation. With disconnect, short-circuit and surge protection, valuable equipment is guarded from power surges or short-circuits associated with lightning strikes and electrostatic discharge (ESD).

Features

- Passive 54v
- Delivers both data & power to Passive 54v PoE-compatible APs/devices
- EPA5006GP provides proprietary PoE power
- Optimal port design for easy mounting/positioning
- Compact design
- Extends power to unwired areas up to 328-ft./100m
- Gigabit Ethernet in & out ports for high-speed devices
- Disconnect, short-circuit & surge protection ensures reliable, secure connections
- Sends up to 32.8W/54v/0.6A of output power
- Ideal for connecting APs, IP Cameras, VoIP phones & more
- Mounts to walls or ceilings with included hardware

Technical Specifications

Standards

802.3 10BaseT
802.3u 100BaseT
802.3ab Gigabit Ethernet

Proprietary PoE

Maximum Output Power

32.8W

Compliance

IEC 60950-1:2005+A1
UL60950-1
ENS55022:2010
EN55024:2010
FCC Part 15 Class B
FCC, CE

Physical Interface

(1) Gigabit Data Port
(1) Gigabit Data & Power Output Port
(1) IEC-320 C6 AC Connector

LED Indicator

1 x Power on Green




Technical Specifications continued

Mounting Wall (anchors & screws included)	Environmental & Physical Temperature Range Operating: 32°F to 104°F (0°C to 40°C) Storage: -22°F to 176°F (-30°C to 80°C)	Packaging Weight: .57 lbs (258.5 g) Length: 5.4" (139 mm) Width: 4.8" (122.5 mm) Height: 2" (52 mm)
Power Input Voltage 100 to 240VAC	Humidity (non-condensing) Operating: 5 to 90% or less Storage: 5 to 90% or less	Package Contents EPA5006GP Gigabit PoE Adapter Power Supply
Input Current 0.8A Max for 100VAC	Dimensions & Weights: EPA5006GP Device (Without Mounting Kit) Weight: .33 lbs (149.6 g) Length: 3.9" (99 mm) Width: 2.27" (68.5 mm) Height: 1.3" (33 mm)	Warranty 1 Year
AC Input Frequency 47-63Hz		
Power Lines Pin4, 5:54V, Pin7, 8:Return		
Added Protection Features Short-Circuit Surge (over current/over voltage)		


Compatible Products

Products	Product Description
EAP1750	Ceiling Mount Dual-Band Wireless AC1750 Access Point/Client Bridge
EAP1200	Ceiling Mount Dual-Band Wireless AC1200 Access Point/Client Bridge
EAP900	Ceiling Mount Dual-Band N900 Indoor Access Point
EAP600	Ceiling Mount Dual-Band N600 Indoor Access Point
EAP350	Ceiling Mount Dual-Band N300 Indoor Access Point
EAP300	Ceiling Mount Wireless N300 Indoor Access Point
ECB1750	Dual-Band Wireless AC1750 Indoor Access Point/Client Bridge
ECB1200	802.11ac 2x2 Dual-Band, High-Powered Wireless Access Point/Client Bridge
ECB600	Dual-Band Wireless N600 Indoor Access Point/Client Bridge
ECB350	Wireless N300 Indoor Access Point/Client Bridge with Gigabit
ECB300	Wireless N300 Indoor Access Point/Client Bridge
ENH1750EXT	Ruggedized 3x3 Dual-Band Wireless AC1750 Outdoor Access Point
ENH900EXT	Ruggedized 3x3 Dual-Band Wireless N900 Outdoor Access Point
ENH710EXT	Dual-Band Wireless N600 Outdoor Access Point
ENH220EXT	High-Capacity Wireless N300 Outdoor Access Point

EPA5006GP Gigabit PoE Adapter

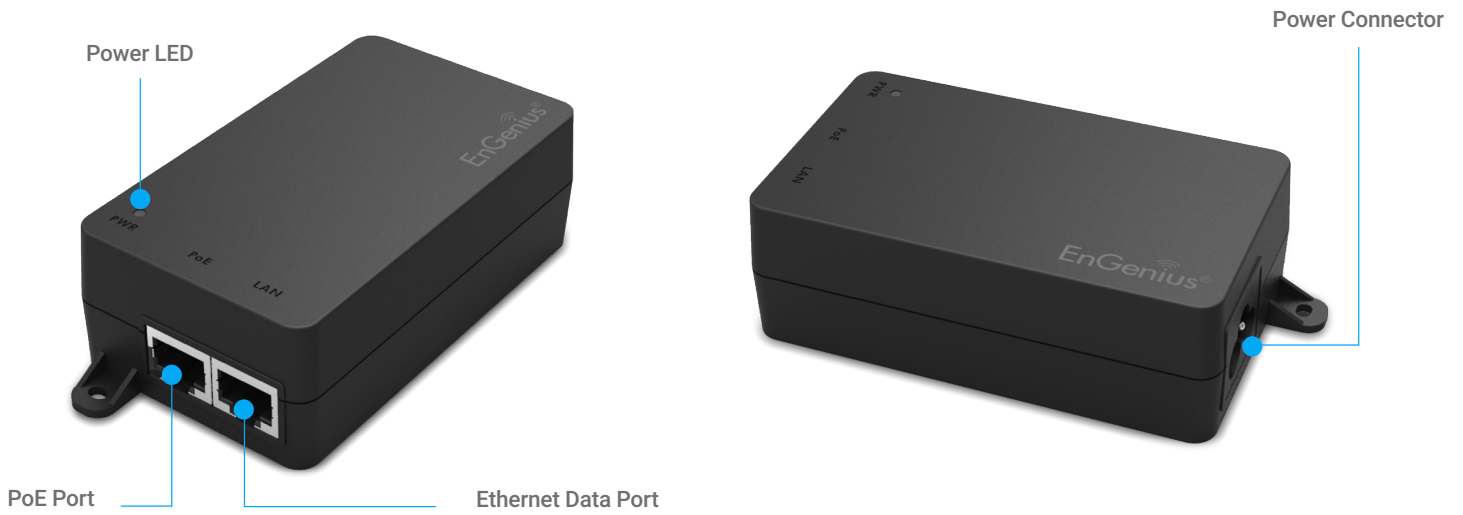

EPA5006GP Gigabit PoE Adapter Application

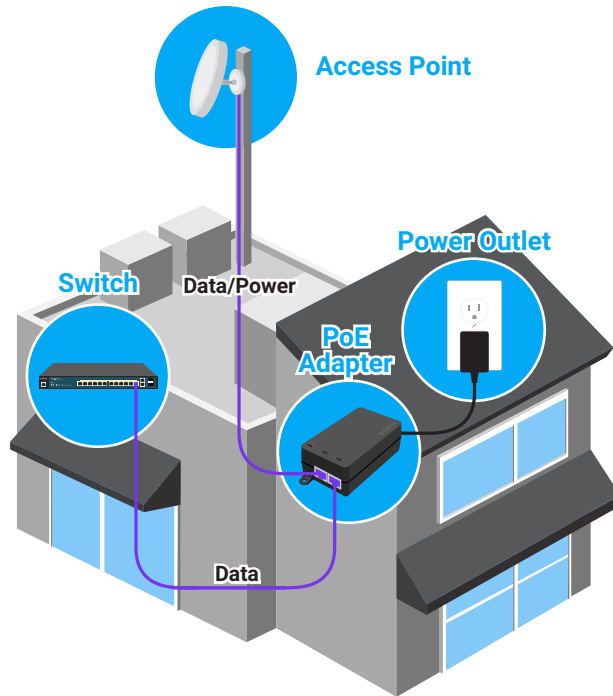

Maximum data rates are based on IEEE 802.11/802.3 standards. Actual throughput and range can vary depending on many factors including environmental conditions, distance between devices, radio interference in the operating environment and mix of devices in the network. Features and specification subject to change without notice. Trademarks and registered trademarks are the property of their respective owners. All rights reserved.

EnGenius Networks Europe BV

Fellenoord 180, 5611 ZB Eindhoven - Nederland

e | sales@engeniushnetworks.eu t | +31 40 8200 888 w | www.engeniushnetworks.eu

Version 20180213EN

Features and specifications subject to change without notice. Trademarks and registered trademarks are the property of their respective owners. All rights reserved.