

# 5GHz AC867 Wave2 Outdoor Long Range Wireless AP/CPE

**The edge 802.11ac built-in high performance AP/CPE with EnJet technology lets client device use predesignated time slots to maximize airtime efficiency**

EnGenius Wireless Long Customers Premise Equipment (CPE) solution is designed for deploying in outdoor condition. To meet today's requirement on varied net-working environment, EnGenius would like to provide the solution as flexible, robust and effective as the organization they desire.

This new generation of ENH500 built-in powerful CPU combines with the state-of-the-art 802.11ac and EnGenius EnJet technology, which supports up to 867 Mbps in 5GHz frequency band and lets client device use predesignated time slots to maximize airtime efficiency on multimedia applications under a pervasive environment. Further more, this brand new ENH500 is designed with high-gain directional antennas which can reach longer distance to extend WiFi coverage. ENH500 is designed to withstand harsh environment conditions including serve and prolonged exposure to sunlight, extreme cold, frost, snow, rainfall, hail and humidity.



## Features


- > Engineered with powerful CPU. 2x2 802.11ac wave 2 Access Point features in multi-user MIMO (MU-MIMO) and able to enhance overall bandwidth and speed to bridge devices.
- > EnJet technology eliminates hidden node collisions to keep throughput more consistently when clients increase.
- > Boost speed up to 867 Mbps air performance in 5GHz frequency band.
- > Engine with 802.11ac Wave2 technology to enhance overall bandwidth and speed to bridge devices.
- > Built-in high gain directional antenna to deliver content to the long-range distance site.
- > Compliance with Proprietary 24V PoE adapter for flexible installation in 100 meters (328 feet).
- > Reset the Access Point over 100 meters (328 feet) via PoE adapter.
- > Robust housing with IP55 enclosure rated to deploy at extreme weather.
- > Deliver high resolution content for multiple IP surveillance over wireless transmission
- > In conjunction with 2.4GHz management interface and EnGenius EnWiFi App helps device configuration and monitoring more easily on a smartphone or tablet.
- > Support ezMaster and SkyKey to achieve comprehensive management via a convenient online interface.

## Wireless Management solution is ideal for deployment in these venues:

- |                        |                      |                       |
|------------------------|----------------------|-----------------------|
| > Airport Terminals    | > Hospital Buildings | > Resort Properties   |
| > Warehouse Operations | > Construction Sites | > Parks & Campgrounds |
| > College Campuses     | > Building Sites     | > Stadiums & Arena    |
| > Corporate Campuses   | > Shopping Malls     | > Public Lightings    |

## Carry Multimedia Content over EnJet Technology

The ENH500 is engineered with a breakthrough EnGenius EnJet technology, which lets an Access Point to arrange each Customer's Premise Equipment (CPE) to send and receive data using pre-designated time slots scheduled. EnGenius EnJet eliminates hidden node collisions and optimizes airtime efficiency under a pervasive environment. The magnitude of EnGenius EnJet is improvement in latency, throughput, and scalability compared to traditionally CSMA outdoor wireless point-to-point or point-to-multipoint systems in its class.

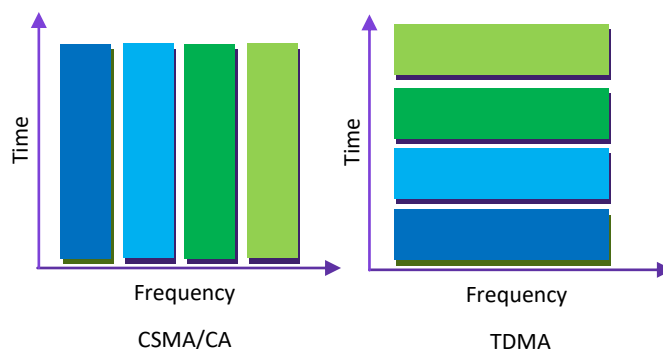

## Enterprise Robust Solution

The brand new ENH500 is easily to install anywhere and its internal electronics have been mounted in an IP55-rated enclosure, one of the better waterproof and dustproof rating available, designed to withstand harsh environment conditions including serve and prolonged exposure to sunlight, extreme cold, frost, snow, rainfall, hail and humidity .


## Scalable and Flexible Deployment for Outdoor Installation

With included mounting accessories, ENH500 provides reliable kits to fix this device on anywhere for delivering wireless signal under outdoor environment. To save the maintenance cost and labors fee on deploying Access Points, these products had been built in two Gigabit Ethernet ports with Power over Ethernet (PoE) functions for receiving power source from the included PoE adapter. With scalable extension over PoE mechanism, Access Points can receive power and signal source easily from 100 meters or 328 feet distance.

Meanwhile, EnGenius ENH500 was built in high-gain directional antennas for delivering the wireless signal to long-range distance.

## EnWiFi App

EnGenius EnWiFi App is a new Wi-Fi management tool that is designed for EnGenius outdoor and indoor WiFi device. Users can enjoy easy configuration and monitoring EnGenius APs/CPEs on a smartphone or tablet. This EnWiFi app helps you set up single or a group of WiFi devices from your smartphone and keep update with the latest Wi-Fi connection status. This WiFi manager makes you access to EnGenius device whenever you want.

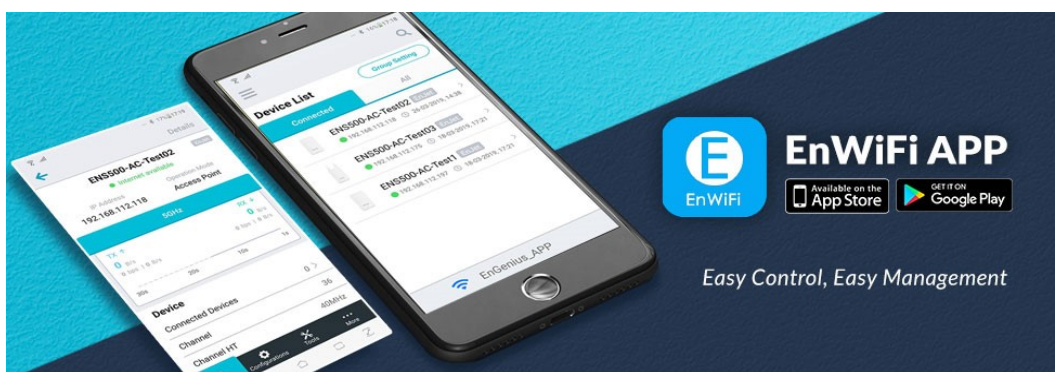

## Securable Portals for different purpose

Administrators can also use **Virtual LAN (VLAN)** with **Guest Network\*** to isolate each client for avoiding an unnecessary touch, leaking sensitive data, and enhancing Internet security and reliability for internal network.

With **VLAN per SSID**, the Integrate VLAN ID with a WLAN service set identifier (SSID) interface will deliver packets to the defined path. The built-in QoS mechanism could allow the specific VLAN SSID to get more bandwidth and deliver video streaming content to the destination first.



\* Guest Network only works when EnJet disabled.

## Restrain Wireless Traffic under a variety of Environments

To effectively manage the usage of each client device at a LAN topology, **Traffic Shaping** controls the bottle of bandwidth to offer the limited bandwidth for an individual **SSID** or **each client** per Access Point. This constraint offers the constant bandwidth to perform specific applications like VOIP and video streaming fluently and smoothly without air congestion on each client devices.

## Comprehensive Network Protection

With EnGenius EnJet featured Access Points, your network is protected from attacks at multiple level through advanced wireless encryption standards such as Wi-Fi Protected Access (WPA2) which uses authentication database and IEEE 802.1X with Radius server. EnGenius also offers the advanced encryption standard (AES) to encrypt traffic between Access Points and client devices. To isolate the internal client devices and guest devices, client isolation can avoid each client device to see each other under the same WLAN. Once threats or events are detected, built-in **E-mail Alerts** systems will automatically deliver an e-mail notification for administrators to trigger immediate actions on these networks threats.

## Technical Specifications Wireless outdoor long-range Access Point

### Wireless Radio Specification

#### Access Point Type:

Outdoor, IP55, single 5GHz 802.11 ac 2x2 MIMO is backwards compatible with 802.11 ac/a/n mode

#### SU-MIMO:

Two (2) spatial stream Single User (SU) MIMO for up to 867 Mbps wireless data rate with VHT80 to a 2x2 wireless device under the 5GHz radio.

#### MU-MIMO

Two (2) Spatial Stream MU-MIMO up to 867 Mbps wireless data rate for transmitting to two (2) streams MU-MIMO capable wireless devices under 5GHz simultaneously.

#### Frequency Radios

2.4GHz: 2412MHz~2482MHz (Management radio)  
5GHz: 5150MHz~5250MHz, 5250MHz~5350MHz, 5470~5725MHz, 5725MHz~5850MHz

Support radios and channels will be varied on the configured regulatory domain.

#### Supported Radio Technology

802.11n/ac: 2x2 MIMO with 2 streams  
802.11ac supports very high throughput (VHT) — VHT 20/40/80 MHz  
802.11n supports high throughput (HT) — HT 20/40 MHz  
802.11n/ac packet aggregation: AMPDU, ASPDU  
Orthogonal frequency-division multiplexing (OFDM) under 802.11ac/a/n  
EnJet technology with Time Division Multiple Access (TDMA) under 802.11ac/n

#### Supported Modulation Type

802.11a/n: BPSK, QPSK, 16-QAM, 64-QAM  
802.11ac: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM

#### Transmit Power (Maximum Value)

15 dBm

Maximum power is limited by regulatory domain

#### Tx Beamforming (TxBF)

Increasing signal reliability and transmitting distance.

#### Supported data rates (Mbps)

802.11a: 6, 9, 12, 18, 24, 36, 48, 54  
802.11n: 6.5 to 300 (MCS0 to MCS15)  
802.11ac: 6.5 to 867 (MCS0 to MCS9, NSS=1 to 2)

### Power

#### Maximum Power Consumption

Maximum 8.93W

#### Power Source

Proprietary 24V PoE (Power: 4, 5; Return: 7, 8)  
Active Ethernet (Power Over Ethernet, PoE)

### Antenna

#### Antenna Types

ENH500: High-gain directional 16 dBi Antenna  
Widely frequency supported from 5150MHz to 5925MHz

### Interfaces

#### Networking Interface

Two (2) 10/100/1000 BASE-T RJ-45 Ethernet Ports  
Main LAN : PoE input LAN Port  
Second LAN: Data transmit LAN Port

#### LED Indicators

Display system and wireless transmission status

#### Reset Button

Convert Access Point to the Factory default or the Users Default via PoE adapter over 100 meter (328 feet) distance.

### Mounting

#### Pole Mounting

Assemble a mounting bracket to fix this Access Point on a pole.

#### Wall Mounting

Mount this Access Point on a flat wall

### Mechanical & Environment

#### Dimensions (Device only)

260mm (L) x 84mm (W) x 55mm (H) (10.24" x 3.31" x 2.17")

#### Weight

415.5g

#### Operating

Temperature: -20°C~60°C (-4°F~140°F)  
Humidity: 0% ~ 90% typical

#### Storage

Temperature: -40°C~80°C (-22°F~176°F)  
Humidity: 0% ~ 90% typical

#### Environment Protection Level

IP55

#### Surge Protection

Line to Line: 1.0KV  
Line to Ground: 2.0KV

#### ESD Protection

Contact: 4KV  
Air: 8KV

### Compliance Regulatory

#### FCC

Subpart 15 B  
Subpart E 15.407

## Technical Specifications Wireless outdoor long-range Access Point

### Operating Mode

#### EnJet

Device is default EnJet enabled to avoid collisions ,reduce latency and packet losses. Data transmission uses traditional CSMA mode when EnJet disabled.

#### Access Point Mode (AP Mode)

Be an Access Point behaves like a central connection for station or clients that support IEEE 802.11 ac/a/n network.  
\*Available on EnJet enabled and disabled.

#### Client Bridge Mode (CB Mode)

The Access Point essentially acts as a wireless adapter that connects to an access point to allow a system of wireless access to the network in the client bridge mode.  
\*Available on EnJet enabled and disabled.

#### WDS Modes

WDS modes uses WDS technology to establish the wireless connection via filling MAC address in both Access Points to enlarge the wireless area.  
\*EnJet enabled: WDS AP / WDS Station mode  
\*EnJet disabled: WDS AP / WDS Bridge / WDS Station mode

### Exquisite RF Management

#### AP Time Slot

When EnJet enabled, the AP will assign time slots for each client's data transmission. The larger the slot, the faster the data transmission.

#### Station Priority

When EnJet enabled, data transmission of client bridge / WDS station can be prioritized in High/Middle/Low level.

#### ACK timeout (Distance Control)

Set the ACK timeout to assure the proper distance to deliver wireless signal properly.

#### Site Survey

Scan signal level of an environment to provide parameters for performing auto transmit power and auto channel.

#### Auto Transmit Power

Automatically adjust power level

#### Auto Channel

Automatically assign a clearly channel to perform RF transmission under a pervasive environment.

#### RSSI Threshold

Kick client devices that the signal (RSSI) is above the set value from the AP for reducing the interference and optimize the connecting quality.

### Optimize Performance

#### Quality of Service

Compliance with IEEE 802.11e standard  
Prioritizes voice over data for both tagged and untagged traffic  
Transmit video, voice and data at the same SSID

#### Power Save Mode

Support U-APSD

#### Pre-Authentication

Compliance with 802.11i & 11x

#### PMK Caching

Compliance with 802.11i  
If wireless client devices has authenticated to an access point, it does not perform a full authentication exchange when client devices roaming between access points.

#### Multicast to Unicast Conversion

Using the IGMP protocol, an access Point delivers high definition content to a large number of clients simultaneously.

### Easy to Management

#### Multiple SSIDs

BSSID support  
EnJet enabled: Support 1 SSID for EnJet linkage and 1 SSID for CSMA client to configure EnJet AP  
EnJet disabled: Support 8 SSIDs for CSMA client

#### Guest Network

Isolate each client for avoiding an unnecessary touch, leaking sensitive data, and enhancing Internet security and reliability.  
\*Available when EnJet disabled

#### VLAN Tag

Independent VLAN setting can be enable or disable. Any packets that enter the Device without a VLAN tag will have a VLAN tag inserted with a PVID (Ethernet Port VID).

#### VLAN Pass-through

Broadcast VLAN-tag packets to find the destination and deliver packets over the defined path. The functions allows network topology scalable and flexible.

#### VLAN Per SSID

Integrate VLAN ID with a SSID interface to forward packets over the defined path. The functions isolate client devices to get more security.

#### Management VLAN

Feature is enabled with specified VLAN ID, the device will only allow management access with the same specified VLAN ID from remotely location by using protocols such as telnet, SSH, snmp, syslog etc.

#### Traffic Shaping

Controls the bottle of bandwidth to offer the limited bandwidth for an individual SSID or each client per Access Point.

#### MAC Address Filtering

Filter up to 32 sets MAC addresses per SSID

#### E-Mail Alert

Provides a network monitoring tool for administrators to stay informed the configuration change.

#### Save Configuration as Users Default

Save the customized configuration as default value for different customer demands.

#### Wi-Fi Scheduler

Perform a regular reboot on access point at assigned schedule  
Perform it to enable or disable 2.4GHz or 5GHz interface from a period time.

#### SNMP & MIB & CLI

v1/v2c/v3 support  
MIB I/II, Private MIB  
CLI Supported

#### RADIUS Accounting

Help operators to offload 3G to Wi-Fi seamlessly

#### Wireless Clients list

Provide the list to display real status of wireless client devices on this Access Point.

### Comprehensive Protection

#### Wireless Encryption Standard

WPA2-AES PSK  
WPA2 Enterprise

#### Hide SSID in beacons

#### Client Isolation

Block/Isolate the communication between the associated clients under the same WLAN.

#### HTTPS

A secure communication protocol can be enabled to allow secure management web access over a computer network.

#### SSH Tunnel

A secure communication protocol can be enabled to allow secure remote shell access or command execution.

## RF Performance Specification(ENH500)

### Wireless outdoor long-range Access Point

Channel	Data Rate	Transmit Power (Aggregated, dBm)	Receive Sensitivity (Aggregated, dBm)
802.11b 2.4 GHz	1 Mbps	-	-
	2 Mbps	-	-
	5.5 Mbps	-	-
	11 Mbps	-	-
802.11g 2.4 GHz	6 Mbps	-	-
	54 Mbps	-	-
802.11a 5 GHz	6 Mbps	15.0	-93.0
	54 Mbps	13.0	-76.0
802.11n HT20 2.4 GHz	MCS 0 / 8	-	-
	MCS 7 / 15	-	-
802.11n HT40 2.4 GHz	MCS 0 / 8	-	-
	MCS 7 / 15	-	-
802.11n HT20 5GHz	MCS 0 / 8	14.0	-93.0
	MCS 7 / 15	13.0	-73.0
802.11n HT40 5GHz	MCS 0 / 8	14.0	-90.0
	MCS 7 / 15	13.0	-71.0
802.11ac VHT20 5GHz	MCS0	14.0	-93.0
	MCS8	13.0	-69.0
802.11ac VHT40 5GHz	MCS0	14.0	-90.0
	MCS9	12.0	-65.0
802.11ac VHT80 5GHz	MCS0	14.0	-86.0
	MCS9	12.0	-61.0

\*Maximum RF performance of the hardware provided. Maximum transmit power is limited by local regulatory.


\*The supported frequency bands are restricted by local regulatory requirements.

\*Transmit power is configured in 1.0dBm increments.


**Antennas Patterns** Wireless outdoor long-range Access Point

ENH500


Port1: H-Plane

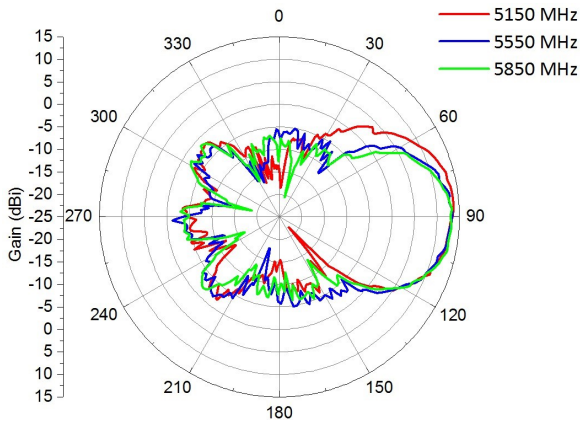


Port1: E-Plane

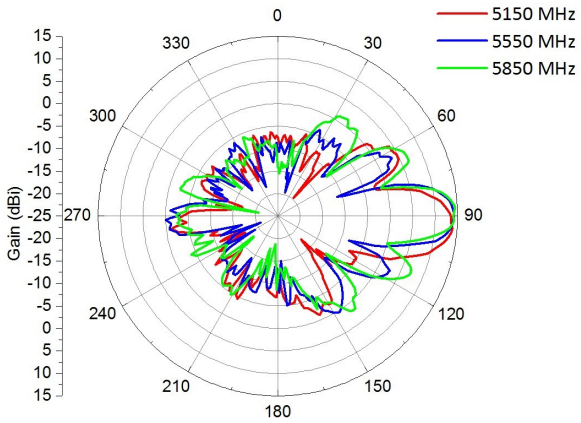

Port2: H-Plane

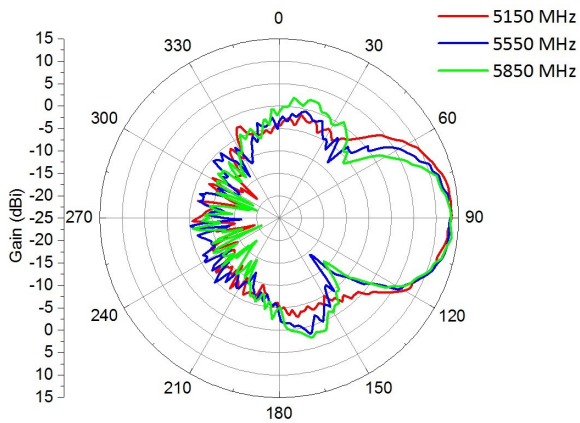


Port2: E-Plane

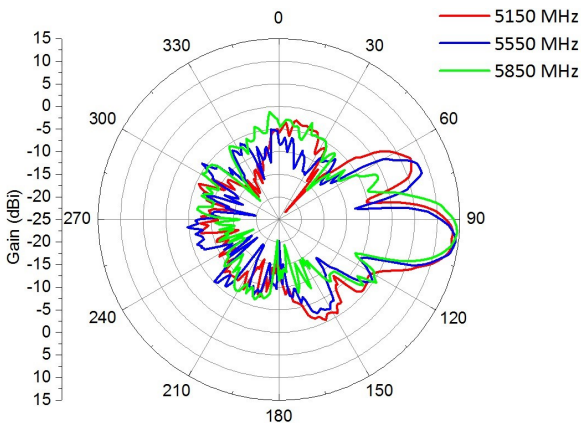



## Physical Interfaces

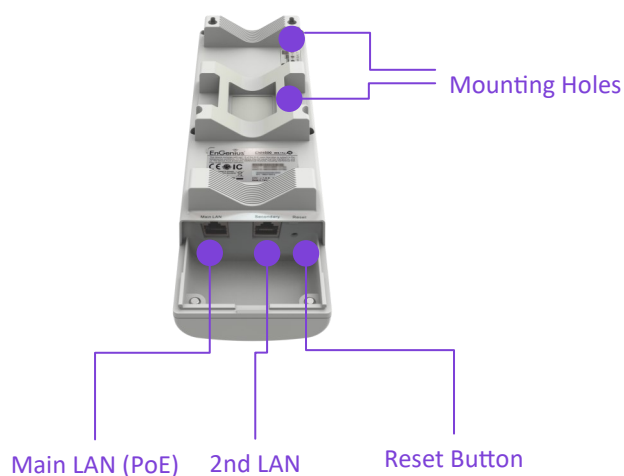

	<b>ENH500</b> 
<b>Standards</b>	802.11ac wave 2/a/n 802.11 b/g/n*
<b>Frequency</b>	2412~2482MHz* 5150~5850MHz**
<b>Tx Power</b>	15 dBm**
<b>Data Rates</b>	867 Mbps
<b>Antennas</b>	Directional 16dBi
<b>Physical Interface</b>	1 x Gigabit 24V PoE Input LAN Port 1 x Gigabit Data LAN Port
<b>Radio Chains/Streams</b>	2x2: 2

\* 2.4GHz radio interface is only for EnWiFi App configuration via mobile device.

\*\* The supported frequency and maximum Tx power will be varied by the local regulatory.

**HQ , Taiwan**  
www.engeniusnetworks.com

**Costa Mesa, California, USA** | (+1) 714 432 8668  
www.engeniustech.com

**Markham, Ontario, Canada** | (+1) 905 940 8181  
www.engeniuscanada.com

**Dubai, UAE** | (+971) 4 357 5599  
www.engenius-me.com

**Singapore** | (+65) 6227 1088  
www.engeniustech.com.sg

**Eindhoven, Netherlands** | (+31) 40 8200 888  
www.engeniusnetworks.eu

**EnGenius®**

Features and specifications subject to change without notice. Trademarks and registered trademarks are the property of their respective owners. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his/her own expense. Prior to installing any surveillance equipment, it is your responsibility to ensure the installation is in compliance with local, state and federal video and audio surveillance and privacy laws.