



EnGenius Cloud Access Points Series

Optimal Performance, Enterprise Features, & Cloud Management

The EnGenius Cloud Access Point Series brings the industry's most advanced features for quick deployment and holistic management. EnGenius provides cloud managed access points for indoor and outdoor deployments. This AI-driven cloud solution is designed to increase wireless networking efficiency and reduce operating costs for small and medium-sized businesses, and empowers IT managers to rapidly implement IT initiatives to achieve their organizational objectives.

Easy Deployment — Cloud-managed access points for indoors consist of an indoor wall plate and ceiling-mount, while outdoor models are built to withstand difficult outdoor environments. Both indoor and outdoor models are highly flexible to meet the needs of distributed networks across multiple sites and scalable with company growth.

Smart Management — EnGenius Cloud's predictive artificial intelligence and access point data collection helps administrators improve network performance and prevent potential issues. The cloud-based solution allows you to manage the firmware and update network policy remotely for distributed clusters of access points based on region, time zone, and other configuration.

Visualized Analytics — With AI-driven cloud computing, the complex data generated by your networks is aggregated into a centralized, easy-to-navigate visual interface with comprehensive statistical tools and management controls. Minimize potential issues by setting up event-based alerts and receive push notifications through the EnGenius Cloud app.


Features & Benefits

- Support standards up to 802.11be (Wi-Fi 7) and backward-compatible with 11a/b/g/n/ac/ax
- Supercharged speeds up to 11,600 Mbps on 6 GHz, 5,800 Mbps on 5 GHz, and 1,400 Mbps on 2.4 GHz
- Tri-radio MU-MIMO improves performance and expands capacities (Wi-Fi 7 device)
- Versatile 4x4 and 2x2 11be & 11ax models with internal & detachable antennas
- Flexible operation modes: AP, Mesh, and AP Mesh
- WPA3 & WPA2-AES authentication support
- Quick-scan device register & configuration and remote monitoring & troubleshooting
- Cloud manages an unlimited number of APs from anywhere with the EnGenius Cloud App
- Mesh wireless support simplifies setup, optimizes signals, and enables self-heals
- WIDS/WIPS, spectrum analysis, and BLE support of Security Access Points

Benefits to Help Grow Your Business


Overview of Access Points Status

The EnGenius Cloud dashboard provides a big-picture view of your network status. The dashboard captures the health status of access points, collects analytics data including network connection status and real-time traffic, and highlights the most used access points, SSID's, clients and applications.

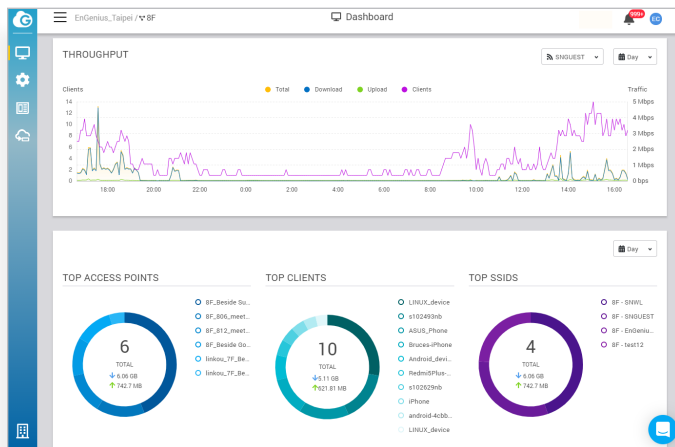

Pinpoint Issues with the AI-Driven Advisory Board

The EnGenius Cloud advisory board uses artificial intelligence to continuously analyze your networks and report potential problems. You can customize notifications to be sent for any identified abnormal situation in your network devices, which will include recommended best responses to common issues derived from EnGenius machine learning and research.

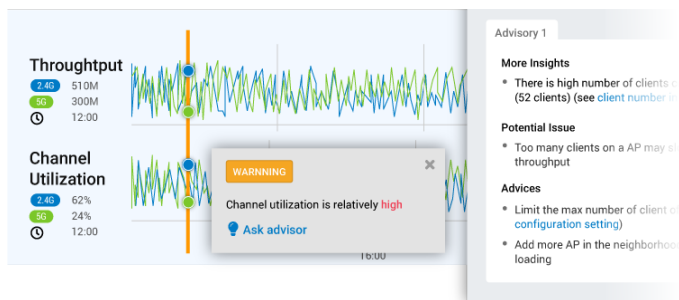

User Authentication for Wi-Fi Access Per SSID

EnGenius Cloud provides a range of authentication methods to cater to diverse business needs. The AAA authentication can be configured either on the cloud or via the Customer's RADIUS server. Additionally, you can set up a Guest Wi-Fi service with voucher functionality, or enable users to sign in by connecting to their social media account.

Monitor and Troubleshoot with the Client Timeline

The client timeline pulls up an entire device's history to allow for tracing of potential problems at their source. It provides additional information about issues by analyzing the authentication process between devices, such as a smartphone and wireless access points. The unfolded timeline also assists you to realize if the network problems are related to weak signals or incorrect password between clients and access points.



Network Management and Monitoring On the Go

With the EnGenius Cloud To-Go mobile app, you can have full control of cloud managed access points and devices. It offers highly customizable and real-time notifications to help you stay alert to all issues when they first arise. By using the EnGenius Cloud To-Go app, businesses can easily create a network and configure access points from any location.

Customize Splash Page with Ease

Empower your IT personnel to customize the splash page as you see fit with pre-made templates with WYSIWYG editor. This gives you a starting point to customize logos, images, or add your own HTML so you can give your customers the entrance page that you want them to see before accessing the network.




Quick Access to Access Point insights

EnGenius Cloud manages all devices in from a single centralized interface. The access points list offers you a summary of the most important current traffic usage data, such as radio configurations and IP settings. In addition to configuration changes, the list view allows administrators to drill down into details of specific access points to check overall configurations, real-time system meters, radio configuration and IP settings for initial setup, monitoring and troubleshooting.



Supervise Access Points with Real-Time Metrics


EnGenius Cloud management can break down an access point's key performance diagnostics such as CPU, memory utilization, and throughput to determine the root cause of a current network problem.

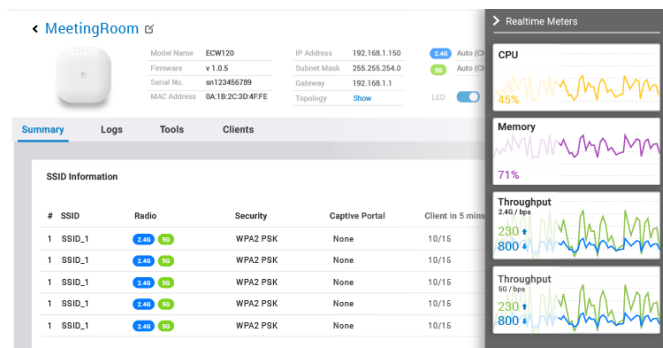

SmartCasting for Mobile Media Streaming to TV

The SmartCasting feature supports fast setup and mobile streaming to the TV. The media sticks, game consoles, or other devices connected to the guest networks bring an exceptional, personalized entertainment experience by casting on the big screen.

* ECW-Lite AP models are not compatible with this feature. (i.e. ECW-xxxL)

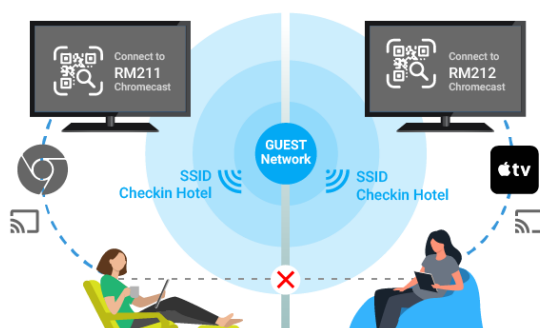


Access Points Locations and Wi-Fi Strength with Floor Plan

The included Wi-Fi site survey tool accepts an upload of your floor plan and simulates Wi-Fi coverage with a heat map of your desired Tx power, RSSI value, and channel. It is capable of factoring in physical obstacles and other impediments to coverage in its forecast.




Block Suspicious Clients from Your Networks

The rogue client monitoring tools allow you to deny access to your SSID for selected clients.

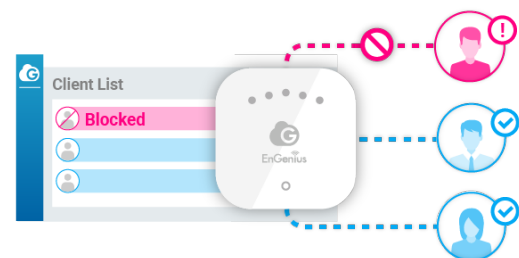

Give Devices VIP Permission to Join Networks Bypass Captive Portal

You can skip authentication for specific clients such as barcode scanners or printers with no web-based interface to proceed for selected clients.

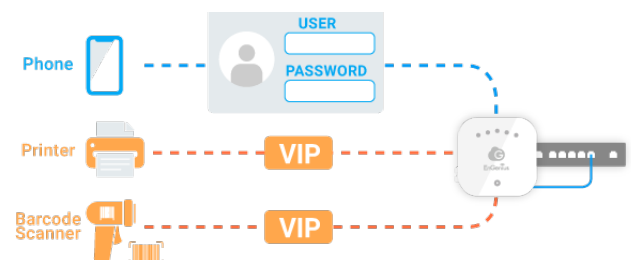

Security Access Points Features

*Available for AP models with dedicated radio only. (i.e. ECW-xxxS)

AirGuard WIDS Detects Different Types of Wireless Threats

AirGuard is an intelligent wireless security system built-in EnGenius Cloud security AP to protect the airspace from rogue devices and wireless threats 24/7. Using dedicated scanning radios, AirGuard security APs continuously scan the environment for rogue APs and other threats based without degrading network speed at all.

AirGuard auto-categorizes those detected wireless threats.

- Rogue Access Point
- Man-in-the-middle
- Valid SSID Misuse
- Evil Twin Attack
- RF Jamming
- De-authentication




AirGuard WIPS Completely Protect the Airspace from Wireless Attacks

Once a threat has been detected in the network, the AirGuard system will send alert notifications to the administrator whenever security issues are found and provide corresponding advice for remediations.

Real-time Diagnostics to Ensure Air Quality

The security AP comes with the diagnostics toolset to monitor the environment's real-time radio interference, channel utilization, and device status. Thus, the administration can quickly find the potential issues and adjust the device settings accordingly for better experience and performance.

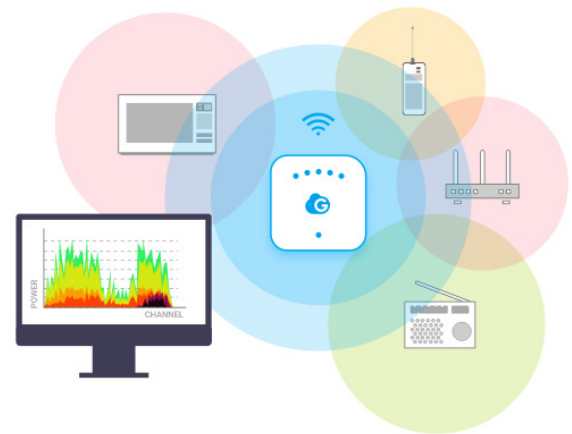

Zero-wait DFS to Avoid Disrupting Client Connection

EnGenius zero-wait DFS feature provides a mechanism for the security AP to avoid connection disruption from radar detection and provides an uninterrupted change of DFS channels when needed.

BLE Capability for Location-based Services and IoT Applications

The security AP can scan and obtain information from Bluetooth devices nearby with a built-in BLE sensor. We also provide BLE API for vendors to communicate with and get data from security AP for any IOT or location-based applications.

Wi-Fi 7 Access Points Solution

Wi-Fi 7 provides Blazing-Fast Speed, Greater Capacity, and Ultra-Low Latency

Wi-Fi 7 utilizes the 2.4 GHz, 5 GHz, and 6 GHz frequency bands with emphasis on the 6 GHz band to provide extensive bandwidth, resulting in high speed and low latency. 4096QAM, Multi-Links Operation, and Multi-RU enhances capacity from multiple client devices, allowing multiple devices to transmit and receive data simultaneously to improve efficiency.

EnGenius Wi-Fi 7 AP brings the Perfect Experience of Future-proof Application

The three 320 MHz channels unlock the full potential of the 6 GHz bands with Wi-Fi 7, eliminating bottlenecks and boosting productivity. Get more transmission done in less time for faster speed.

- 4K/8K high-resolution streaming.
- Cloud computing and collaborative work.
- Next generation experience of AR, VR, and Metaverse.
- High-density wireless network environment

EnGenius Cloud Access Points

	Indoor				
					
Model Name	Cloud5 2x2 Wallplate	Cloud6 2x2 Wallplate	Cloud5 2x2	Cloud5 4x4	Cloud6 2x2
Model Number	ECW115	ECW215	ECW120	ECW130	ECW220
Wi-Fi Standard	11ac Wave 2	Wi-Fi 6 (11ax)	11ac Wave 2	11ac Wave 2	Wi-Fi 6 (11ax)
Frequency	2.4 GHz & 5 GHz	2.4 GHz & 5 GHz	2.4 GHz & 5 GHz	2.4 GHz & 5 GHz	2.4 GHz & 5 GHz
Data Rate (2.4 GHz)	400 Mbps	600 Mbps	400 Mbps	800 Mbps	600 Mbps
Data Rate (5 GHz)	867 Mbps	1200 Mbps	867 Mbps	1800 Mbps	1200 Mbps
Data Rate (6 GHz)	-	-	-	-	-
Radio Chains	2 x 2:2	2 x 2:2	2 x 2:2	4 x 4:4	2 x 2:2
Tx Power (2.4 GHz)	17 dBm	20 dBm	23 dBm	25 dBm	22 dBm
Tx Power (5 GHz)	17 dBm	20 dBm	23 dBm	24 dBm	22 dBm
Tx Power (6 GHz)	-	-	-	-	-
Antennas (2.4 GHz)	2 x 4 dBi Omni	2 x 4 dBi Omni	2 x 5 dBi Omni	4 x 4 dBi Omni	2 x 4 dBi Omni
Antennas (5 GHz)	2 x 5 dBi Omni	2 x 5 dBi Omni	2 x 5 dBi Omni	4 x 6 dBi Omni	2 x 5 dBi Omni
Antennas (6 GHz)	-	-	-	-	-
PoE Standard	802.3af/at	802.3af/at	802.3af	802.3at	802.3af
Scanning Radio	-	-	-	-	-
BLE	-	-	-	-	-
Power Consumption (Peak)	11.9W	14.2W	12W	19.1W	12.8W
Ethernet Port	2x GE PoE+ ports 1x GE PSE Out port	2x GE PoE+ ports 1x GE PSE Out port	1x GE PoE port	1x GE PoE+port 1x GE port	1x GE PoE port
Mounting	Wall	Wall	Wall/ Ceiling	Wall/ Ceiling	Wall/ Ceiling
IP Rating	N/A	N/A	N/A	N/A	N/A
Dimensions	140 x 90 x 40 mm	140 x 90 x 40 mm	161 x 161 x 41 mm	215 x 215 x 56 mm	160 x 160 x 33 mm
Mesh Technology	●	●	●	●	●
Mobile app (Cloud To-Go)	●	●	●	●	●

* The data is for ECW220 hardware v2 only. For hardware v1, the Tx-power is 20 dBm.

EnGenius Cloud Access Points

	Indoor				
					
Model Name	Cloud6 2x2 S	Cloud6 4x4	Cloud6 4x4 S	Cloud7 2x2x2	Cloud7 4x4x4
Model Number	ECW220S	ECW230	ECW230S	ECW526	ECW536
Wi-Fi Standard	Wi-Fi 6 (11ax)	Wi-Fi 6 (11ax)	Wi-Fi 6 (11ax)	Wi-Fi 7 (11be)	Wi-Fi 7 (11be)
Frequency	2.4 GHz & 5 GHz	2.4 GHz & 5 GHz	2.4 GHz & 5 GHz	2.4 GHz & 5 GHz & 6 GHz	2.4 GHz & 5 GHz & 6 GHz
Data Rate (2.4 GHz)	600 Mbps	1200 Mbps	1200 Mbps	700 Mbps	1,400 Mbps
Data Rate (5 GHz)	1200 Mbps	2400 Mbps	2400 Mbps	2,900 Mbps	5,800 Mbps
Data Rate (6 GHz)	-	-	-	5,800 Mbps	11,600 Mbps
Radio Chains	2 x 2:2	4 x 4:4	4 x 4:4	2 x 2:2	4 x 4:4
Tx Power (2.4 GHz)	22 dBm	23 dBm	23 dBm	23 dBm	25 dBm
Tx Power (5 GHz)	22 dBm	23 dBm	23 dBm	22 dBm	24 dBm
Tx Power (6 GHz)	-	-	-	22 dBm	24 dBm
Antennas (2.4 GHz)	2 x 4 dBi Omni	4 x 5 dBi Omni	4 x 5 dBi Omni	2 x 5 dBi Omni	4 x 5 dBi Omni
Antennas (5 GHz)	2 x 5 dBi Omni	4 x 6 dBi Omni	4 x 6 dBi Omni	2 x 6 dBi Omni	4 x 6 dBi Omni
Antennas (6 GHz)	-	-	-	2 x 6 dBi Omni	4 x 5 dBi Omni
PoE Standard	802.3af/at	802.3at	802.3at	802.3at	802.3bt
Scanning Radio	●	-	●	-	-
BLE	●	-	●	-	-
Power Consumption (Peak)	12.8W	19.5W	19.5W	21 W	38 W
Ethernet Port	1x GE PoE+ port	1x 2.5GE PoE+ port	1x 2.5GE PoE+ port	1x 10GE PoE+port	1x 10GE PoE++port 1x 10GE port
Mounting	Wall/ Ceiling	Wall/ Ceiling	Wall/ Ceiling	Wall/ Ceiling	Wall/ Ceiling
IP Rating	N/A	N/A	N/A	N/A	N/A
Dimensions	160 x 160 x 33 mm	205 x 205 x 33 mm	205 x 205 x 33 mm	190 x 190 x 39.5 mm	230 x 230 x 39.5 mm
Mesh Technology	●	●	●	●	●
Mobile app (Cloud To-Go)	●	●	●	●	●

* The data is for ECW220 hardware v2 only. For hardware v1, the Tx-power is 20 dBm.

EnGenius Cloud Access Points

Indoor					
					
Model Name	Cloud7 4x4x4 S	Cloud6E 4x4x4	Cloud6 2x2 Lite	Cloud6 4x4 Lite	Cloud7 2x3x3 Lite
Model Number	ECW536S	ECW336	ECW210L	ECW212L	ECW516L
Wi-Fi Standard	Wi-Fi 7 (11be)	Wi-Fi 6E (11ax)	Wi-Fi 6 (11ax)	Wi-Fi 6 (11ax)	802.11a/b/g/n/ac/ax/be
Frequency	2.4 GHz & 5 GHz & 6 GHz	2.4 GHz & 5 GHz & 6 GHz	2.4 GHz & 5 GHz	2.4 GHz & 5 GHz	2.4 GHz & 5 GHz & 6GHz
Data Rate (2.4 GHz)	1,400 Mbps	1,200 Mbps	600 Mbps	1200 Mbps	700 Mbps
Data Rate (5 GHz)	5,800 Mbps	2,400 Mbps	2400 Mbps	2400 Mbps	4,300 Mbps
Data Rate (6 GHz)	11,600 Mbps	4,800 Mbps	-	-	8,700 Mbps
Radio Chains	4 x 4:4	4 x 4:4	2 x 2:2	4 x 4:4	2 x 2:2(2.4GHz), 3x 3:3(5GHz & 6GHz)
Tx Power (2.4 GHz)	25 dBm	23 dBm	21 dBm	23 dBm	22 dBm
Tx Power (5 GHz)	24 dBm	23 dBm	21 dBm	23 dBm	22 dBm
Tx Power (6 GHz)	24 dBm	23 dBm	-	-	22 dBm
Antennas (2.4 GHz)	4 x 5 dBi Omni	4 x 5 dBi Omni	2 x 6 dBi Omni	4 x 5 dBi Omni	2 x 5 dBi
Antennas (5 GHz)	4 x 6 dBi Omni	4 x 6 dBi Omni	2 x 7 dBi Omni	4 x 5 dBi Omni	3 x 5 dBi
Antennas (6 GHz)	4 x 5 dBi Omni	4 x 5 dBi Omni	-	-	3 x 5 dBi
PoE Standard	802.3bt	802.3at	802.3af	802.3at	802.3at
Scanning Radio	●	-	-	-	-
BLE	●	-	-	-	-
Power Consumption (Peak)	37 W	22.5W	10.7W	17W	20.7W
Ethernet Port	1x 10GE PoE++port 1x 10GE port	1x 5GE PoE+ port	1x GE PoE port	1x 2.5GE PoE+ port	1x 2.5GE PoE+ port
Mounting	Wall/ Ceiling	Wall/ Ceiling	Wall/ Ceiling	Wall/ Ceiling	Wall/ Ceiling
IP Rating	N/A	N/A	N/A	N/A	N/A
Dimensions	230 x 230 x 39.5 mm	205 x 205 x 33 mm	160 x 160 x 30 mm	205 x 205 x 33 mm	205 x 205 x 33 mm
Mesh Technology	●	●	●	●	●
Mobile app (Cloud To-Go)	●	●	●	●	●

EnGenius Cloud Access Points

	Indoor		Outdoor		
					
Model Name	Cloud7 2x2	Cloud7 2x2x2	Cloud5 2x2 Outdoor	Cloud6 2x2 Outdoor	Cloud6 4x4 Outdoor
Model Number	ECW510	ECW520	ECW160	ECW260	ECW270
Wi-Fi Standard	Wi-Fi 7 (11be)	Wi-Fi 7 (11be)	11ac Wave 2	Wi-Fi 6 (11ax)	Wi-Fi 6 (11ax)
Frequency	2.4 GHz & 5 GHz	2.4 GHz & 5 GHz & 6GHz	2.4 GHz & 5 GHz	2.4 GHz & 5GHz	2.4 GHz & 5GHz
Data Rate (2.4 GHz)	700 Mbps	700 Mbps	400 Mbps	600 Mbps	1200 Mbps
Data Rate (5 GHz)	4,300 Mbps	4,300 Mbps	867 Mbps	1200 Mbps	2400 Mbps
Data Rate (6 GHz)	-	5,800 Mbps	-	-	-
Radio Chains	2 x 2:2	2 x 2:2	2 x 2:2	2 x 2:2	4 x 4:4
Tx Power (2.4 GHz)	23 dBm	23 dBm	23 dBm	23 dBm	24 dBm
Tx Power (5 GHz)	21 dBm	23 dBm	23 dBm	25 dBm	24 dBm
Tx Power (6 GHz)	-	20 dBm	-	-	-
Antennas (2.4 GHz)	2 x 3 dBi	2 x 6 dBi	2 x 5 dBi External Omni	2 x 5 dBi External Omni	4 x 5 dBi External Omni
Antennas (5 GHz)	2 x 5 dBi	2 x 6 dBi	2 x 5 dBi External Omni	2 x 5 dBi External Omni	4 x 7 dBi External Omni
Antennas (6 GHz)	-	2 x 6 dBi	-	-	-
PoE Standard	802.3at	802.3at	802.3af/at	802.3af/at	802.3bt
Scanning Radio	-	-	-	-	-
BLE	-	-	-	-	-
Power Consumption (Peak)	15.5W	25.4W	12.6W	15.9W	46W
Ethernet Port	1x 2.5GE PoE+ port	1x 2.5GE PoE+ port	1x GE PoE+ port	1x 2.5GE PoE+ port	1x 2.5GE PoE++ port 1x GE PSE Out port
Mounting	Wall/ Ceiling	Wall/ Ceiling	Wall/ Pole	Wall/ Pole	Wall/ Pole
IP Rating	N/A	N/A	IP67	IP67	IP68
Dimensions	160 x 160 x 32 mm	158 x 158 x 35.8 mm	112 x 173 x 30 mm	124 x 190 x 52.5 mm	218 x 285 x 53 mm
Mesh Technology	●	●	●	●	●
Mobile app (Cloud To-Go)	●	●	●	●	●

Technical Specifications

Standards

ECW115/ECW120/ECW130

IEEE 802.11b/g/n on 2.4 GHz

IEEE 802.11a/n/ac on 5 GHz

IEEE 802.3 u/ab

ECW160

IEEE 802.11b/g/n on 2.4 GHz

IEEE 802.11a/n/ac on 5 GHz

IEEE 802.3 u/ab

IEEE 802.3az

ECW215/ECW230/ECW260/ECW220S/ECW230S/ECW270/ECW212L

IEEE 802.11ax on 2.4 GHz

IEEE 802.11ax on 5 GHz

IEEE 802.3 u/ab

Backward compatible with 802.11a/b/g/n/ac

ECW220/ECW210L

IEEE 802.11ax on 2.4 GHz

IEEE 802.11ax on 5 GHz

IEEE 802.3 u/ab

IEEE 802.3az

Backward compatible with 802.11a/b/g/n/ac

ECW336/ECW516L

IEEE 802.11ax on 2.4 GHz

IEEE 802.11ax on 5 GHz

IEEE 802.11ax on 6 GHz

IEEE 802.3 u/ab

Backward compatible with 802.11a/b/g/n/ac

ECW510

IEEE 802.11be on 2.4 GHz

IEEE 802.11be on 5 GHz

IEEE 802.3 u/ab

Backward compatible with 802.11a/b/g/n/ac/ax

ECW526/ECW536/ECW536S/ECW520

IEEE 802.11be on 2.4 GHz

IEEE 802.11be on 5 GHz

IEEE 802.11be on 6 GHz

IEEE 802.3 u/ab

Backward compatible with 802.11a/b/g/n/ac/ax

Antenna

ECW115/ECW215

2 x 2.4 GHz: 4 dBi

2 x 5 GHz: 5 dBi

Integrated Omni-Directional Antenna

ECW120/ECW212L

2 x 2.4 GHz: 5 dBi

2 x 5 GHz: 5 dBi

Integrated Omni-Directional Antenna

ECW130

4 x 2.4 GHz: 4 dBi

4 x 5 GHz: 6 dBi

Integrated Omni-Directional Antenna

ECW160/ECW260

2 x 2.4 GHz: 5 dBi

2 x 5 GHz: 5 dBi

External Omni-Directional Antenna

ECW210L

2 x 2.4 GHz: 6 dBi

2 x 5 GHz: 7 dBi

Integrated Omni-Directional Antenna

ECW220/ECW220S

2 x 2.4 GHz: 4 dBi

2 x 5 GHz: 5 dBi

Integrated Omni-Directional Antenna

ECW230/ECW230S

4 x 2.4 GHz: 5 dBi

4 x 5 GHz: 6 dBi

Integrated Omni-Directional Antenna

ECW270

4 x 2.4 GHz: 5 dBi

4 x 5 GHz: 7 dBi

External Omni-Directional Antenna

ECW336/ECW536/ECW536S

4 x 2.4 GHz: 5 dBi

4 x 5 GHz: 6 dBi

4 x 6 GHz: 5 dBi

Integrated Omni-Directional Antenna

ECW510

2 x 2.4 GHz: 3 dBi

2 x 5 GHz: 5 dBi

Integrated Omni-Directional

ECW520

2 x 2.4 GHz: 6 dBi

2 x 5 GHz: 6 dBi

2 x 6 GHz: 6 dBi

Integrated Omni-Directional

ECW516L

2 x 2.4 GHz: 5 dBi

3 x 5 GHz: 5 dBi

3 x 6 GHz: 5 dBi

Integrated Omni-Directional Antenna

ECW526

2 x 2.4 GHz: 5 dBi

2 x 5 GHz: 6 dBi

2 x 6 GHz: 6 dBi

Integrated Omni-Directional Antenna

Technical Specifications

Physical Interface

ECW115/ECW215

- 2 x GE Port (PoE+)
- 1 x GE Port (PSE Out ; requires 802.3at power source)
- 1 x DC Jack
- 1 x Reset Button

ECW120/ECW220/ECW210L

- 1 x GE Port (PoE)
- 1 x DC Jack
- 1 x Reset Button

ECW130

- 1 x GE Port (PoE+)
- 1 x GE Port
- 1 x DC Jack
- 1 x Reset Button

ECW160

- 1 x GE Port (PoE+)

ECW212L/ECW230/ECW230S/ECW516L/ECW510/ECW520

- 1 x 2.5GE Port (PoE+)
- 1 x DC Jack
- 1 x Reset Button

ECW220S

- 1 x GE Port (PoE+)
- 1 x DC Jack
- 1 x Reset Button

ECW260

- 1 x 2.5GE Port (PoE+)

ECW270

- 1 x GE Port
- 1 x 2.5GE Port (PoE++)

ECW336

- 1 x 5GE Port (PoE+)
- 1 x DC Jack
- 1 x Reset Button

ECW526

- 1 x 10GE Port (PoE+)
- 1 x DC Jack
- 1 x Reset Button

ECW536/ECW536S

- 1 x 10GE Port (PoE++)
- 1 x 10GE Port
- 1 x DC Jack
- 1 x Reset Button

LED Indicators

ECW115/ECW215/ECW526/ECW536/ECW536S/ECW210L/ECW510/ECW520

- 1 x Multi-color LED

ECW120

- 1 x Power
- 1 x LAN

- 1 x 2.4 GHz

- 1 x 5 GHz

- 1 x Mesh

ECS130/ECW270

- 1 x Power
- 1 x LAN1
- 1 x LAN2

- 1 x 2.4 GHz

- 1 x 5 GHz

- 1 x 5 GHz

ECW160/ECW220/ECW230/ECW260/ECW220S/ECW212L

- 1 x Power

- 1 x LAN

- 1 x 2.4 GHz

- 1 x 5 GHz

ECW230S

- 1 x Power

- 1 x LAN

- 1 x 2.4 GHz

- 1 x 5 GHz

- 1 x Scanning

- 1 x BLE

ECW336/ECW516L

- 1 x Power

- 1 x LAN

- 1 x 2.4 GHz

- 1 x 5 GHz

- 1 x 6 GHz

Power Source

ECW115

- Power-over-Ethernet: 802.3af/at Input
- 12VDC /1A Power Adapter

ECW120

- Power-over-Ethernet: 802.3af Input
- 12VDC /1A Power Adapter

ECW130/ECW230/ECW230S/ECW336/ECW526/ECW212L

- Power-over-Ethernet: 802.3af Input
- 12VDC /1.5A Power Adapter

ECW510

- Power-over-Ethernet: 802.3at Input
- 12VDC /1.5A Power Adapter

Technical Specifications

ECW210L/ECW516L/ECW520
Power-over-Ethernet: 802.3at Input
12VDC /2A Power Adapter
ECW215/ECW220/ECW220S
Power-over-Ethernet: 802.3af/at Input
12VDC /1.5A Power Adapter
ECW160/ ECW260
Power-over-Ethernet: 802.3af/at Input
Active Ethernet (PoE)
ECW270
Power-over-Ethernet: 802.3bt Input
Active Ethernet (PoE++)
ECW536/ECW536S
Power-over-Ethernet: 802.3bt Input
12VDC /3A Power Adapter

Maximum Power Consumption

ECW115
11.9W
ECW120
12W
ECW130
19.1W
ECW160
12.6W
ECW210L
10.7W
ECW212L
17W
ECW215
14.2W
ECW220/ECW220S
12.8W
ECW230/ECW230S
19.5W
ECW260
15.9W
ECW270
46W
ECW336
22.5W
ECW510
15.5W
ECW520
25.4W
ECW516L
20.7W
ECW526
21W

ECW536
38W
ECW536S
37W

Wireless & Radio Specifications Operating Frequency

ECW115/ECW120/ECW130/ECW160/ECW215/ECW220/ECW230/ECW260/ECW220S/ECW230S/ECW270C/ECW510
Dual-Radio Concurrent 2.4 GHz & 5 GHz
ECW336/ECW516L/ECW520/ECW526/ECW536/ECW536S
Tri-Radio Concurrent 2.4 GHz & 5 GHz & 6GHz

Operation Modes

ECW115/ECW120/ECW130/ECW160/ECW210L/ECW212/ECW215/ECW220/ECW230/ECW260/ECW220S/ECW230S/ECW270/ECW336/ECW510/ECW520/ECW516L/ECW526/ECW536/ECW536S
Managed mode: AP, AP Mesh, Mesh

Frequency Radio

ECW115/ECW120/ECW130/ECW160/ECW210L/ECW212L/ECW215/ECW220/ECW230/ECW220S/ECW230S/ECW336
2.4 GHz: 2400 MHz ~ 2482 MHz
5 GHz: 5150 MHz ~ 5250 MHz, 5250 MHz ~ 5350 MHz, 5470 MHz ~ 5725 MHz, 5725 MHz ~ 5850 MHz
ECW260/ECW270
2.4 GHz: 2400 MHz ~ 2483 MHz
5 GHz: 5150 MHz ~ 5250 MHz, 5250 MHz ~ 5350 MHz, 5470 MHz ~ 5725 MHz, 5725 MHz ~ 5875 MHz
ECW336
2.4 GHz: 2400 MHz ~ 2482 MHz
5 GHz: 5150 MHz ~ 5250 MHz, 5250 MHz ~ 5350 MHz, 5470 MHz ~ 5725 MHz, 5725 MHz ~ 5850 MHz
6 GHz: 5925MHz ~ 6425MHz, 6525MHz ~ 6875MHz
ECW510
2.4 GHz: 2400 MHz ~ 2482 MHz
5 GHz: 5150 MHz ~ 5250 MHz, 5250 MHz ~ 5350 MHz, 5470 MHz ~ 5725 MHz, 5725 MHz ~ 5850 MHz, 5850MHz ~ 5895MHz
ECW520
2.4 GHz: 2400 MHz ~ 2482 MHz
5 GHz: 5150 MHz ~ 5250 MHz, 5250 MHz ~ 5350 MHz, 5470 MHz ~ 5725 MHz, 5725 MHz ~ 5850 MHz
6GHz: 5925-7125MHz
ECW516L/ECW526/ECW536/ECW536S
2.4 GHz: 2400 MHz ~ 2482 MHz
5 GHz: 5150 MHz ~ 5250 MHz, 5250 MHz ~ 5350 MHz, 5470 MHz ~ 5725 MHz, 5725 MHz ~ 5850 MHz
6GHz: 5925-7125MHz

Transmit Power

ECW115
Up to 17 dBm on 2.4 GHz
Up to 17 dBm on 5 GHz
(Maximum power is limited by regulatory domain)
ECW120/ECW160

Technical Specifications

Up to 23 dBm on 2.4 GHz
Up to 23 dBm on 5 GHz
(Maximum power is limited by regulatory domain)
ECW130
Up to 25 dBm on 2.4 GHz
Up to 24 dBm on 5 GHz
(Maximum power is limited by regulatory domain)
ECW210L
Up to 21 dBm on 2.4 GHz
Up to 21 dBm on 5 GHz
(Maximum power is limited by regulatory domain)
ECW215
Up to 20 dBm on 2.4 GHz
Up to 20 dBm on 5 GHz
(Maximum power is limited by regulatory domain)
ECW220/ECW220S
Up to 22 dBm on 2.4 GHz
Up to 22 dBm on 5 GHz
(Maximum power is limited by regulatory domain)
ECW212L/ECW230/ECW230S
Up to 23 dBm on 2.4 GHz
Up to 23 dBm on 5 GHz
(Maximum power is limited by regulatory domain)
ECW260/ECW270
Up to 23 dBm on 2.4 GHz
Up to 25 dBm on 5 GHz
(Maximum power is limited by regulatory domain)
ECW336
Up to 23 dBm on 2.4 GHz
Up to 23 dBm on 5 GHz
Up to 23 dBm on 6 GHz
(Maximum power is limited by regulatory domain)
ECW510
Up to 23 dBm on 2.4 GHz
Up to 21 dBm on 5 GHz
(Maximum power is limited by regulatory domain)
ECW520
Up to 23 dBm on 2.4 GHz
Up to 23 dBm on 5 GHz
Up to 20 dBm on 6 GHz
(Maximum power is limited by regulatory domain)
ECW516L
Up to 22 dBm on 2.4 GHz
Up to 22 dBm on 5 GHz
Up to 22 dBm on 6 GHz
(Maximum power is limited by regulatory domain)
ECW526
Up to 23 dBm on 2.4 GHz

Up to 22 dBm on 5 GHz
Up to 22 dBm on 6 GHz
(Maximum power is limited by regulatory domain)
ECW536/ECW536S
Up to 25 dBm on 2.4 GHz
Up to 24 dBm on 5 GHz
Up to 24 dBm on 6 GHz
(Maximum power is limited by regulatory domain)
Tx Beamforming (TxBF)
Radio Chains/Spatial Stream
ECW115/ECW120/ECW160/ECW210L/ECW215/ECW220/ECW260/ECW220S//ECW510/ECW520/ECW526
2 × 2:2
ECW130/ECW212L/ECW230/ECW230S/ECW270/ECW336/ECW536/ECW536S
4 × 4:4
ECW516L
2 x 2:2/ 3 x 3:3
SU-MIMO
ECW115/ECW120/ECW160
Two(2) spatial stream Single User (SU) MIMO for up to 400 Mbps wireless data rate with VHT40 bandwidth to a 2x2 wireless device under the 2.4GHz radio.
Two(2) spatial stream Single User (SU) MIMO for up to 867 Mbps wireless data rate with VHT80 to a 2x2 wireless device under the 5GHz radio.
ECW130
Four(4) spatial stream Single User (SU) MIMO for up to 800 Mbps wireless data rate with VHT40 bandwidth to a 4x4 wireless device under the 2.4GHz radio.
Four(4) spatial stream Single User (SU) MIMO for up to 1800 Mbps wireless data rate with VHT80 to a 4x4 wireless device under the 5GHz radio.
ECW210L
Two (2) spatial stream Single User (SU) MIMO for up to 574 Mbps wireless data rate with HE40 bandwidth to a 2x2 wireless client device under the 2.4GHz radio.
Two (2) spatial stream Single User (SU) MIMO for up to 2,400 Mbps wireless data rate with HE160 to a 2x2 wireless device under the 5GHz radio.
ECW215/ECW220/ECW220S
Two (2) spatial stream Single User (SU) MIMO for up to 574 Mbps wireless data rate with HE40 bandwidth to a 2x2 wireless client device under the 2.4GHz radio.
Two (2) spatial stream Single User (SU) MIMO for up to 1,200 Mbps wireless data rate with VHT80 to a 2x2 wireless device under the 5GHz radio.
ECW212L/ECW230/ECW230S/ECW270
Four (4) spatial stream Single User (SU) MIMO for up to 1148 Mbps wireless data rate with HE40 bandwidth to a 4x4 wireless client device under the 2.4GHz radio.
Four (4) spatial stream Single User (SU) MIMO for up to 2400 Mbps wireless data rate with HE80 to a 4x4 wireless device under the 5GHz radio.
ECW260
Two(2) spatial streams SU-MIMO for 2.4GHz and two(2) spatial streams SU-MIMO for 5GHz up to totally 1,774Mbps wireless data rate to a single 11ax wireless client device under the both 2.4GHz and 5GHz radio.
ECW336
Four (4) spatial stream Single User (SU) MIMO for up to 1148 Mbps wireless data rate with HE40 bandwidth to a 4x4 wireless client device under the 2.4GHz radio.

Technical Specifications

Four (4) spatial stream Single User (SU) MIMO for up to 2400 Mbps wireless data rate with HE80 to a 4x4 wireless device under the 5GHz radio.

Four (4) spatial stream Single User (SU) MIMO for up to 4800 Mbps wireless data rate with HE160 to a 4x4 wireless device under the 6GHz radio.

ECW510

Two(2) spatial stream Single User (SU) MIMO for up to 700 Mbps wireless data rate with EHT40 bandwidth to a 2x2 wireless device under the 2.4GHz radio.

Two(2) spatial stream Single User (SU) MIMO for up to 4,300 Mbps wireless data rate with EHT240* to a 2x2 wireless device under the 5GHz radio.

ECW520

Two(2) spatial stream Single User (SU) MIMO for up to 700 Mbps wireless data rate with EHT40 bandwidth to a 2x2 wireless device under the 2.4GHz radio.

Two(2) spatial stream Single User (SU) MIMO for up to 4,300 Mbps wireless data rate with EHT240* to a 2x2 wireless device under the 5GHz radio.

Two(2) spatial stream Single User (SU) MIMO for up to 5,800 Mbps wireless data rate with EHT320 to a 2x2 wireless device under the 6GHz radio.

ECW516L

Two(2) spatial stream Single User (SU) MIMO for up to 700 Mbps wireless data rate with VHT40 bandwidth to a 2x2 wireless device under the 2.4GHz radio.

Three(3) spatial stream Single User (SU) MIMO for up to 4,300 Mbps wireless data rate with HE160 to a 3x3 wireless device under the 5GHz radio.

Three(3) spatial stream Single User (SU) MIMO for up to 8,700 Mbps wireless data rate with EHT320 to a 3x3 wireless device under the 6GHz radio.

ECW526

Two(2) spatial stream Single User (SU) MIMO for up to 700 Mbps wireless data rate with VHT40 bandwidth to a 2x2 wireless device under the 2.4GHz radio.

Two(2) spatial stream Single User (SU) MIMO for up to 2,900 Mbps wireless data rate with HE160 to a 2x2 wireless device under the 5GHz radio.

Two(2) spatial stream Single User (SU) MIMO for up to 5,800 Mbps wireless data rate with EHT320 to a 2x2 wireless device under the 6GHz radio.

ECW536/ECW536S

Four(4) spatial stream Single User (SU) MIMO for up to 1,400 Mbps wireless data rate with VHT40 bandwidth to a 4x4 wireless device under the 2.4GHz radio.

Four(4) spatial stream Single User (SU) MIMO for up to 5,800 Mbps wireless data rate with HE160 bandwidth to a 4x4 wireless device under the 5GHz radio.

Four(4) spatial stream Single User (SU) MIMO for up to 11,600 Mbps wireless data rate with EHT320 bandwidth to a 4x4 wireless device under the 6GHz radio.

MU-MIMO

ECW115/ECW120/ECW160

Two (2) Spatial Stream MU-MIMO up to 867 Mbps wireless data rate for transmitting to two (2) streams MU-MIMO capable wireless devices under 5GHz simultaneously.

ECW130

Four(4) spatial stream MU-MIMO for up to 800 Mbps wireless data rate with VHT40 bandwidth to a 4x4 wireless device under the 2.4GHz radio.

Four(4) spatial stream MU-MIMO for up to 1800 Mbps wireless data rate with VHT80 to a 4x4 wireless device under the 5GHz radio simultaneously.

ECW210L

Two (2) spatial streams Multiple (MU)-MIMO up to 2,400 Mbps wireless data rate for transmitting to two (2) streams MU-MIMO 11ax capable wireless client devices under 5GHz simultaneously.

Two (2) spatial streams Multiple (MU)-MIMO up to 574 Mbps wireless data rate for transmitting to two (2) streams MU-MIMO 11ax capable wireless client devices under 2.4GHz simultaneously.

ECW215/ECW220/ECW220S

Two (2) spatial streams Multiple (MU)-MIMO up to 1,200 Mbps wireless data rate for transmitting to two (2) streams MU-MIMO 11ax capable wireless client devices under 5GHz simultaneously.

Two (2) spatial streams Multiple (MU)-MIMO up to 574 Mbps wireless data rate for transmitting to two (2) streams MU-MIMO 11ax capable wireless client devices under 2.4GHz simultaneously.

ECW212L/ECW230/ECW230S/ECW270

Four (4) spatial streams Multiple (MU)-MIMO up to 2,400 Mbps wireless data rate for transmitting to four (4) streams MU-MIMO 11ax capable wireless client devices under 5GHz simultaneously.

Four (4) spatial streams Multiple (MU)-MIMO up to 1,148 Mbps wireless data rate for transmitting to four (4) streams MU-MIMO 11ax capable wireless client devices under 2.4GHz simultaneously.

ECW260

Two(2) spatial streams multi-user (MU)-MIMO for up to 1201 Mbps wireless data rate to transmit to one(1) two streams MU-MIMO 11ax capable wireless client devices under 5GHz simultaneously.

Two(2) spatial streams multi-user (MU)-MIMO for up to 574 Mbps wireless data rate to transmit to one(1) two streams MU-MIMO 11ax capable wireless client devices under 2.4GHz simultaneously.

ECW336

Four (4) spatial streams Multiple (MU)-MIMO up to 4800 Mbps wireless data rate for transmitting to four (4) streams MU-MIMO 11ax capable wireless client devices under 6GHz simultaneously.

Four (4) spatial streams Multiple (MU)-MIMO up to 2,400 Mbps wireless data rate for transmitting to four (4) streams MU-MIMO 11ax capable wireless client devices under 5GHz simultaneously.

Four (4) spatial streams Multiple (MU)-MIMO up to 1,148 Mbps wireless data rate for transmitting to four (4) streams MU-MIMO 11ax capable wireless client devices under 2.4GHz simultaneously.

ECW510

Two(2) spatial stream MU-MIMO for up to 700 Mbps wireless data rate with EHT40 bandwidth to a 2x2 wireless device under the 2.4GHz radio.

Two(2) spatial stream MU-MIMO for up to 4,300 Mbps wireless data rate with EHT240* to a 2x2 wireless device under the 5GHz radio simultaneously.

ECW520

Two(2) spatial stream MU-MIMO for up to 700 Mbps wireless data rate with EHT40 bandwidth to a 2x2 wireless device under the 2.4GHz radio.

Two(2) spatial stream MU-MIMO for up to 4,300 Mbps wireless data rate with EHT240* to a 2x2 wireless device under the 5GHz radio simultaneously.

Two(2) spatial stream MU-MIMO for up to 5,800 Mbps wireless data rate with EHT320 to a 2x2 wireless device under the 6GHz radio simultaneously.

ECW516L

Two(2) spatial stream MU-MIMO for up to 700 Mbps wireless data rate with VHT40 bandwidth to a 2x2 wireless device under the 2.4GHz radio.

Three(3) spatial stream MU-MIMO for up to 4,300 Mbps wireless data rate with HE160 to a 3x3 wireless device under the 5GHz radio simultaneously.

Three(3) spatial stream MU-MIMO for up to 8,700 Mbps wireless data rate with EHT320 to a 3x3 wireless device under the 6GHz radio simultaneously.

ECW526

Two(2) spatial stream MU-MIMO for up to 700 Mbps wireless data rate with VHT40 bandwidth to a 2x2 wireless device under the 2.4GHz radio.

Two(2) spatial stream MU-MIMO for up to 2,900 Mbps wireless data rate with HE160 to a 2x2 wireless device under the 5GHz radio simultaneously.

Two(2) spatial stream MU-MIMO for up to 5,800 Mbps wireless data rate with EHT320 to a 2x2 wireless device under the 6GHz radio simultaneously.

ECW536/ECW536S

Four(4) spatial stream MU-MIMO for up to 1,400 Mbps wireless data rate with VHT40 bandwidth to a 4x4 wireless device under the 2.4GHz radio simultaneously.

*EHT 240 MHz bandwidth is available on the 5GHz band and may be supported in some regions/countries due to regulatory restrictions.

Technical Specifications

Four(4) spatial stream MU-MIMO for up to 5,800 Mbps wireless data rate with HE160 bandwidth to a 4x4 wireless device under the 5GHz radio simultaneously.

Four(4) spatial stream MU-MIMO for up to 11,600 Mbps wireless data rate with EHT320 bandwidth to a 4x4 wireless device under the 6GHz radio simultaneously.

Supported Data Rates (Mbps)*

ECW115/ECW120/ECW130/ECW160

2.4 GHz: Max 400 (MCS0 to MCS11, NSS = 1 to 2)

5 GHz: Max 867 (MCS0 to MCS11, NSS = 1 to 2)

802.11b: 1, 2, 5.5, 11

802.11a/g: 6, 9, 12, 18, 36, 48, 54

802.11n: 6.5 to 300 Mbps (MCS0 to MCS15) (Additional 25% bandwidth when enabling 256-QAM under HT40)

802.11ac: 6.5 to 867 Mbps (MCS0 to MCS9, NSS = 1 to 2)

ECW210L

802.11ax:

2.4 GHz: 9 to 574 (MCS0 to MCS11, NSS = 1 to 2)

5 GHz: 18 to 2400 (MCS0 to MCS11, NSS = 1 to 4)

802.11b: 1, 2, 5.5, 11

802.11a/g: 6, 9, 12, 18, 36, 48, 54

802.11n: 6.5 to 300 Mbps (MCS0 to MCS15)

802.11ac: 6.5 to 867 Mbps (MCS0 to MCS9, NSS = 1 to 2)

ECW215/ECW220/ECW220S

802.11ax:

2.4 GHz: 9 to 574 (MCS0 to MCS11, NSS = 1 to 2)

5 GHz: 18 to 1200 (MCS0 to MCS11, NSS = 1 to 2)

802.11b: 1, 2, 5.5, 11

802.11a/g: 6, 9, 12, 18, 36, 48, 54

802.11n: 6.5 to 300 Mbps (MCS0 to MCS15)

802.11ac: 6.5 to 867 Mbps (MCS0 to MCS9, NSS = 1 to 2)

ECW212L/ECW230/ECW230S/ECW270

802.11ax:

2.4 GHz: 9 to 1,148 (MCS0 to MCS11, NSS = 1 to 4)

5 GHz: 18 to 2,400 (MCS0 to MCS11, NSS = 1 to 4)

802.11b: 1, 2, 5.5, 11

802.11a/g: 6, 9, 12, 18, 36, 48, 54

802.11n: 6.5 to 600 (MCS0 to MCS31)

802.11ac: 6.5 to 1,733 (MCS0 to MCS9, NSS = 1 to 4)

ECW260

802.11ax:

2.4 GHz: 9 to 574 (MCS0 to MCS11, NSS = 1 to 2)

5 GHz: 18 to 1200 (MCS0 to MCS11, NSS = 1 to 2)

802.11b: 1, 2, 5.5, 11

802.11a/g: 6, 9, 12, 18, 36, 48, 54

802.11n: 6.5 to 300 (MCS0 to MCS15)

802.11ac: 6.5 to 867 (MCS0 to MCS9, NSS = 1 to 2)

ECW336

802.11ax:

2.4 GHz: 9 to 1,148 (MCS0 to MCS11, NSS = 1 to 4)

5 GHz: 18 to 2,400 (MCS0 to MCS11, NSS = 1 to 4)

6 GHz: 18 to 4,800 (MCS0 to MCS11, NSS = 1 to 4)

802.11b: 1, 2, 5.5, 11

802.11a/g: 6, 9, 12, 18, 36, 48, 54

802.11n: 6.5 to 600 (MCS0 to MCS31)

802.11ac: 6.5 to 1,733 (MCS0 to MCS9, NSS = 1 to 4)

ECW510

802.11be:

2.4 GHz: Max 700 (MCS0 to MCS13, NSS = 1 to 4)

5 GHz: Max 4,300 (MCS0 to MCS13, NSS = 1 to 4)

802.11ax:

2.4 GHz: 9 to 574 (MCS0 to MCS11, NSS = 1 to 4)

5 GHz: 18 to 2,400 (MCS0 to MCS11, NSS = 1 to 4)

802.11b: 1, 2, 5.5, 11

802.11a/g: 6, 9, 12, 18, 36, 48, 54

802.11n: 6.5 to 600 (MCS0 to MCS31)

802.11ac: 6.5 to 1,733 (MCS0 to MCS9, NSS = 1 to 4)

ECW520

802.11be:

2.4 GHz: Max 700 (MCS0 to MCS13, NSS = 1 to 4)

5 GHz: Max 4,300 (MCS0 to MCS13, NSS = 1 to 4)

6 GHz: Max 5,800 (MCS0 to MCS13, NSS = 1 to 4)

802.11ax:

2.4 GHz: 9 to 574 (MCS0 to MCS11, NSS = 1 to 4)

5 GHz: 18 to 2,400 (MCS0 to MCS11, NSS = 1 to 4)

6 GHz: 18 to 2,400 (MCS0 to MCS11, NSS = 1 to 4)

802.11b: 1, 2, 5.5, 11

802.11a/g: 6, 9, 12, 18, 36, 48, 54

802.11n: 6.5 to 600 (MCS0 to MCS31)

802.11ac: 6.5 to 1,733 (MCS0 to MCS9, NSS = 1 to 4)

ECW516L

802.11be:

2.4 GHz: Max 700 (MCS0 to MCS11, NSS = 1 to 4)

5 GHz: Max 4,300 (MCS0 to MCS11, NSS = 1 to 4)

6 GHz: Max 8,700 (MCS0 to MCS11, NSS = 1 to 4)

802.11ax:

2.4 GHz: 9 to 574 (MCS0 to MCS11, NSS = 1 to 4)

5 GHz: 18 to 1,800 (MCS0 to MCS11, NSS = 1 to 4)

6 GHz: 18 to 3,600 (MCS0 to MCS11, NSS = 1 to 4)

802.11b: 1, 2, 5.5, 11

802.11a/g: 6, 9, 12, 18, 36, 48, 54

802.11n: 6.5 to 600 (MCS0 to MCS31)

802.11ac: 6.5 to 1,733 (MCS0 to MCS9, NSS = 1 to 4)

ECW526

802.11be:

2.4 GHz: Max 700 (MCS0 to MCS13, NSS = 1 to 4)

5 GHz: Max 2,900 (MCS0 to MCS13, NSS = 1 to 4)

Technical Specifications

6 GHz: Max 5,800 (MCS0 to MCS13, NSS = 1 to 4)
802.11ax:
2.4 GHz: 9 to 574 (MCS0 to MCS11, NSS = 1 to 4)
5 GHz: 18 to 2,400 (MCS0 to MCS11, NSS = 1 to 4)
6 GHz: 18 to 2,400 (MCS0 to MCS11, NSS = 1 to 4)
802.11b: 1, 2, 5.5, 11
802.11a/g: 6, 9, 12, 18, 36, 48, 54
802.11n: 6.5 to 600 (MCS0 to MCS31)
802.11ac: 6.5 to 1,733 (MCS0 to MCS9, NSS = 1 to 4)
ECW536/ECW536S
802.11be:
2.4 GHz: Max 1,400 (MCS0 to MCS13, NSS = 1 to 4)
5 GHz: Max 5,800 (MCS0 to MCS13, NSS = 1 to 4)
6 GHz: Max 11,600 (MCS0 to MCS13, NSS = 1 to 4)
802.11ax:
2.4 GHz: 9 to 1,148 (MCS0 to MCS11, NSS = 1 to 4)
5 GHz: 18 to 4,800 (MCS0 to MCS11, NSS = 1 to 4)
6 GHz: 18 to 4,800 (MCS0 to MCS11, NSS = 1 to 4)
802.11b: 1, 2, 5.5, 11
802.11a/g: 6, 9, 12, 18, 36, 48, 54
802.11n: 6.5 to 600 (MCS0 to MCS31)
802.11ac: 6.5 to 1,733 (MCS0 to MCS9, NSS = 1 to 4)

Supported Radio Technologies

ECW115/ECW120/ECW160

802.11a/g/n/ac: Orthogonal Frequency-Division Multiplexing (OFDM)
802.11b: Direct-Sequence Spread Spectrum (DSSS)
802.11n/ac: 2x2 MIMO with 2 Streams

ECW130

802.11a/g/n/ac: Orthogonal Frequency-Division Multiplexing (OFDM)
802.11b: Direct-Sequence Spread Spectrum (DSSS)
802.11n/ac: 4x4 MIMO with 4 Streams

ECW210L/ECW212L/ECW215/ECW220/ECW230/ECW260/ECW220S/ECW230S/ECW270/ECW336

802.11ax: Orthogonal Frequency Division Multiple Access(OFDMA)
802.11a/g/n/ac: Orthogonal Frequency Division Multiple (OFDM)
802.11b: Direct-sequence spread-spectrum (DSSS)

ECW516L/ECW526/ECW536/ECW536S/ECW510/ECW520

802.11be/ax: Orthogonal Frequency Division Multiple Access(OFDMA)
802.11a/g/n/ac: Orthogonal Frequency Division Multiple (OFDM)
802.11b: Direct-sequence spread-spectrum (DSSS)

Channelization

ECW115/ECW120/ECW130/ECW160

802.11ac Supports Very High Throughput (VHT)—VHT 20/40/80 MHz
802.11n Supports High Throughput (HT)—HT 20/40 MHz
802.11n Supports High Throughput (HT) Under the 2.4 GHz Radio—HT 40 MHz (256-QAM)
802.11n/ac Packet Aggregation: A-MPDU, A-SPDU
ECW212L/ECW215/ECW220/ECW230/ECW260/ECW220S/ECW230S/ECW270
802.11ax supports high efficiency throughput (HE) —HE 20/40/80 MHz

802.11ac supports very high throughput (VHT) —VHT 20/40/80 MHz
802.11n supports high throughput (HT) —HT 20/40 MHz
802.11n supports high throughput under the 2.4GHz radio —HT40 MHz (256-QAM)
802.11n/ac/ax packet aggregation: A-MPDU, A-SPDU
ECW210L/ECW336
802.11ax supports high efficiency throughput (HE) —HE 20/40/80/160 MHz
802.11ac supports very high throughput (VHT) —VHT 20/40/80 MHz
802.11n supports high throughput (HT) —HT 20/40 MHz
802.11n supports high throughput under the 2.4GHz radio —HT40 MHz (256-QAM)
802.11n/ac/ax packet aggregation: A-MPDU, A-SPDU
ECW516L/ECW526/ECW536/ECW536S
802.11be supports extreme high efficiency (EHT) —EHT 20/40/80/160/320 MHz
802.11ax supports high efficiency throughput (HE) —HE 20/40/80/160 MHz
802.11ac supports very high throughput (VHT) —VHT 20/40/80 MHz
802.11n supports high throughput (HT) —HT 20/40 MHz
802.11n supports high throughput under the 2.4GHz radio —HT40 MHz (256-QAM)
802.11n/ac/ax packet aggregation: A-MPDU, A-SPDU
ECW510/ECW520
802.11be supports extreme high efficiency (EHT) —EHT 20/40/80/160/240/320MHz
802.11ax supports high efficiency throughput (HE) —HE 20/40/80/160 MHz
802.11ac supports very high throughput (VHT) —VHT 20/40/80 MHz
802.11n supports high throughput (HT) —HT 20/40 MHz
802.11n supports high throughput under the 2.4GHz radio —HT40 MHz (256-QAM)
802.11n/ac/ax packet aggregation: A-MPDU, A-SPDU

Supported Modulation

ECW115/ECW120/ECW130/ECW160

802.11ac: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM
802.11a/g/n: BPSK, QPSK, 16-QAM, 64-QAM
802.11b: BPSK, QPSK, CCK

ECW210L/ECW212L/ECW215/ECW220/ECW230/ECW260/ECW220S/ECW230S/ECW270/ECW336

802.11ax: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM, 1024-QAM
802.11ac: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM
802.11a/g/n: BPSK, QPSK, 16-QAM, 64-QAM
802.11b: BPSK, QPSK, CCK

ECW516L/ECW526/ECW536/ECW536S/ECW510/ECW520

802.11be: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM, 1024-QAM, 4096-QAM
802.11ax: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM, 1024-QAM
802.11ac: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM
802.11a/g/n: BPSK, QPSK, 16-QAM, 64-QAM
802.11b: BPSK, QPSK, CCK

DFS Certification

ECW210L/ECW220/ECW230/ECW220S/ECW230S/ECW336/ECW526/ECW536/ECW536S
FCC/CE/IC

Technical Specifications

ECW160/ECW260/ECW270
CE
AirGuard (WIPS/WIDS)
ECW220S/ECW230S/ECW536S
Yes
Zero-wait DFS
ECW220S/ECW230S/ECW536S
Yes
Dedicated Scanning Radio
ECW220S/ECW230S/ECW536S
Yes
Max Concurrent User
ECW115/ECW120/ECW130/ECW160/ECW210L/ECW212L/ECW215/ECW516L
128 Per radio
ECW220/ECW230/ECW260/ECW220S/ECW230S/ECW270/ECW336
512 Per radio
ECW510/ECW520/ECW526/ECW536/ECW536S
512
Client Balancing
ECW115/ECW120/ECW130/ECW160/ECW210L/ECW212L/ECW215/ECW220/ECW230/ECW260/ECW220S/ECW230S/ECW270/ECW336/ECW510/ECW520/ECW516L/ECW526/ECW536/ECW536S
Yes
Auto Channel Selection
ECW115/ECW120/ECW130/ECW160/ECW210L/ECW212L/ECW215/ECW220/ECW230/ECW260/ECW220S/ECW230S/ECW270/ECW336/ECW510/ECW520/ECW516L/ECW526/ECW536/ECW536S
Yes
Management Multiple BSSID
ECW115/ECW120/ECW130/ECW160/ECW210L/ECW212L/ECW215/ECW220/ECW230/ECW260/ECW220S/ECW230S/ECW270/ECW516L
8 SSIDs on both 2.4GHz and 5GHz bands.
ECW336/ECW510/ECW520/ECW526/ECW536/ECW536S
8 SSIDs on both 2.4GHz, 5GHz & 6GHz bands
VLAN Tagging
ECW115/ECW120/ECW130/ECW160/ECW210L/ECW212L/ECW215/ECW220/ECW230/ECW260/ECW220S/ECW230S/ECW270/ECW336/ECW510/ECW520/ECW516L/ECW526/ECW536/ECW536S
Supports 802.1q SSID-to-VLAN Tagging
Cross-Band VLAN Pass-Through
Management VLAN
Spanning Tree
ECW115/ECW120/ECW130/ECW160/ECW210L/ECW212L/ECW215/ECW220/ECW230/ECW260/ECW220S/ECW230S/ECW270/ECW336/ECW510/ECW520/ECW516L/ECW526/ECW536/ECW536S
Supports 802.1d Spanning Tree Protocol

QoS (Quality of Service)

ECW115/ECW120/ECW130/ECW160/ECW210L/ECW212L/ECW215/ECW220/ECW230/ECW260/ECW220S/ECW230S/ECW270/ECW336/ECW510/ECW520/ECW516L/ECW526/ECW536/ECW536S

Compliance With IEEE 802.11e Standard

WMM

Fast Roaming

ECW115/ECW120/ECW130/ECW160/ECW210L/ECW212L/ECW215/ECW220/ECW230/ECW260/ECW220S/ECW230S/ECW270/ECW336/ECW510/ECW520/ECW516L/ECW526/ECW536/ECW536S

802.11r/k

Wireless Security

ECW115/ECW120/ECW130/ECW160/ECW215/ECW220/ECW230/ECW260/ECW220S/ECW230S/ECW270/ECW336/ECW510/ECW520/ECW526/ECW536/ECW536S

WPA2-PSK

WPA2-Enterprise

WPA3-PSK

WPA3-Enterprise

Hide SSID in Beacons

Wireless STA (Client) Connected List

Client Isolation

Client Access Control

ECW210L/ECW212L/ECW516L

WPA2-PSK

WPA3-PSK

Hide SSID in Beacons

Wireless STA (Client) Connected List

Client Isolation

Client Access Control

Interface

ECW115/ECW120/ECW130/ECW160/ECW215/ECW220/ECW230/ECW260/ECW220S/ECW230S/ECW270/ECW336/ECW510/ECW520/ECW526/ECW536/ECW536S

IPv4, IPv6

ECW210L/ECW212L/ECW516L

IPv4

Local Web Access

ECW115/ECW120/ECW130/ECW160/ECW210L/ECW212L/ECW215/ECW220/ECW230/ECW260/ECW220S/ECW230S/ECW270/ECW336/ECW510/ECW520/ECW516L/ECW526/ECW536/ECW536S

Supports HTTP or HTTPS

Environment & Physical Temperature Range

ECW115/ECW120/ECW130/ECW210L/ECW212L/ECW215/ECW220/ECW230/ECW220S/ECW230S/ECW336/ECW510/ECW520/ECW516L

Operating: 32°F~104°F (0 °C~40 °C)

Storage: -40 °F~176 °F (-40 °C~80 °C)

*Maximum data rates are based on IEEE 802.11 standards. Actual throughput and range may vary depending on distance between devices or traffic and bandwidth load in the network.

Technical Specifications

ECW526/ECW536/ECW536S
Operating: 32°F~104°F (0 °C~50 °C)
Storage: -40 °F~176 °F (-40 °C~80 °C)
ECW160/ECW260
Operating: -4°~140°F/-20°C~60°C
Storage: -40F°~176°F/-40°C~80°C
ECW270
Operating: -4°~149°F/-20°C~65°C
Storage: -40F°~176°F/-40°C~80°C
Humidity (non-condensing)
ECW115/ECW120/ECW130/ECW160/ECW210L/ECW212L/ECW215/ECW220/ ECW230/ECW260/ECW220S/ECW230S/ECW270/ECW336/ECW510/ECW520/ ECW516L/ECW526/ECW536/ECW536S
Operating: 90% or less
Storage: 90% or less
Dimensions & Weight
ECW115
Weight: 225 g
Width: 140 mm
Length: 90 mm
Height: 40 mm
ECW120
Weight: 362.8 g
Width: 161.5 mm
Length: 161.5 mm
Height: 41.6 mm
ECW130
Weight: 634 g
Width: 215 mm
Length: 215 mm
Height: 56 mm
ECW160
Weight: 829.5 g
Width: 111.2 mm
Length: 173.6 mm
Height: 30.29 mm
ECW210L
Weight: 380 g
Width: 160 mm
Length: 160 mm
Height: 30 mm
ECW212L
Weight: 570 g
Width: 205 mm
Length: 205 mm
Height: 33 mm
ECW215
Weight: 269 g

Width: 140 mm
Length: 90 mm
Height: 40 mm
ECW220
Weight: 382 g
Width: 160 mm
Length: 160 mm
Height: 33.2 mm
ECW230
Weight: 597 g
Width: 205 mm
Length: 205 mm
Height: 33.2 mm
ECW220S
Weight: 390 g
Width: 160 mm
Length: 160 mm
Height: 33.2 mm
ECW230S
Weight: 607 g
Width: 205 mm
Length: 205 mm
Height: 33.2 mm
ECW260
Weight: 720 g
Width: 124 mm
Length: 190 mm
Height: 52.5 mm
ECW270
Weight: 1870 g
Width: 218 mm
Length: 285 mm
Height: 53 mm
ECW336
Weight: 630 g
Width: 205 mm
Length: 205 mm
Height: 33.2 mm
ECW516L
Weight: TBD
Width: 205 mm
Length: 205 mm
Height: 33 mm
ECW510
Weight: 660 g
Width: 160 mm
Length: 160 mm
Height: 32 mm

Technical Specifications

ECW520
Weight: 600 g
Width: 158 mm
Length: 158 mm
Height: 35.8 mm
ECW526
Weight: 720g
Width: 190 mm
Length: 190 mm
Height: 39.5 mm
ECW536/ECW536S
Weight: 1270g
Width: 230 mm
Length: 230 mm
Height: 39.5 mm
Package Contents
ECW115
1 – ECW115 Cloud Managed Indoor Access Point
1 – Junction Plate (short)
1 – Junction Plate (tall)
1 – Mounting Screw Kit
1 – Product Card
ECW120
1 – ECW120 Cloud Managed Indoor Access Point
1 – T-Rail Mounting Kit
1 – Ceiling and Wall Mount Screw Kit
1 – Mounting Bracket
1 – Product Card
ECW130
1 – ECW130 Cloud Managed Indoor Access Point
1 – Ceiling Mount Base (9/16" Trail)
1 – Ceiling Mount Base (15/16" Trail)
1 – Ceiling and Wall Mount Screw Kit
1 – Product Card
ECW160
1 – ECW160 Cloud Managed Outdoor Access Point
2 – Pole-Mounting Brackets
1 – Wall-Mount Screw Set
2 – 2.4GHz 5dBi SMA Antennas
2 – 5GHz 5dBi SMA Antennas
1 – Product Card
ECW210L
1 – ECW210L Indoor Access Point
1 – Ceiling Mount Base (9/16" Trail)
1 – Ceiling Mount Base (15/16" Trail)
1 – Ceiling and Wall Mount Screw Kit
1 – Product Card

ECW212L
1 – ECW212L Indoor Access Point
1 – Ceiling Mount Base (9/16" Trail)
1 – Ceiling Mount Base (15/16" Trail)
1 – Ceiling and Wall Mount Screw Kit
1 – Product Card
ECW215
1 – ECW215 Cloud Managed Indoor Access Point
1 – Junction Plate (short)
1 – Junction Plate (tall)
1 – Mounting Screw Kit
1 – Product Card
ECW220
1 – ECW220 Cloud Managed Indoor Access Point
1 – Ceiling Mount Base (9/16" Trail)
1 – Ceiling Mount Base (15/16" Trail)
1 – Ceiling and Wall Mount Screw Kit
1 – Product Card
ECW230
1 – ECW230 Cloud Managed Indoor Access Point
1 – Ceiling Mount Base (9/16" Trail)
1 – Ceiling Mount Base (15/16" Trail)
1 – Ceiling and Wall Mount Screw Kit
1 – Product Card
ECW220S
1 – ECW220S Cloud Managed Indoor Access Point
1 – Ceiling Mount Base (9/16" Trail)
1 – Ceiling Mount Base (15/16" Trail)
1 – Ceiling and Wall Mount Screw Kit
1 – Product Card
ECW230S
1 – ECW230S Cloud Managed Indoor Access Point
1 – Ceiling Mount Base (9/16" Trail)
1 – Ceiling Mount Base (15/16" Trail)
1 – Ceiling and Wall Mount Screw Kit
1 – Product Card
ECW260
1 – ECW260 Cloud Managed Outdoor Access Point
2 – Pole-Mounting Brackets
1 – Wall-Mount Screw Set
2 – 2.4GHz 5dBi SMA Antennas
2 – 5GHz 5dBi SMA Antennas
1 – Product Card
ECW270
1 – ECW270 Cloud Managed Outdoor Access Point
2 – Mounting Brackets
1 – Wall-Mount Screw Set

Technical Specifications

4 – 2.4GHz 5dBi Detachable Antennas
4 – 5GHz 7dBi Detachable Antennas
1 – Product Card
ECW336
1 – ECW336 Cloud Managed Indoor Access Point
1 – Ceiling Mount Base (9/16" Trail)
1 – Ceiling Mount Base (15/16" Trail)
1 – Ceiling and Wall Mount Screw Kit
1 – Product Card
ECW510
1 – ECW510 Cloud Managed Indoor Access Point
1 – Ceiling Mount Base (9/16" Trail)
1 – Ceiling Mount Base (15/16" Trail)
1 – Ceiling and Wall Mount Screw Kit
1 – Product Card
ECW520
1 – ECW520 Cloud Managed Indoor Access Point
1 – Ceiling Mount Base (9/16" Trail)
1 – Ceiling Mount Base (15/16" Trail)
1 – Ceiling and Wall Mount Screw Kit
1 – Product Card
ECW516L
1 – ECW516L Indoor Access Point
1 – Ceiling Mount Base (9/16" Trail)
1 – Ceiling Mount Base (15/16" Trail)
1 – Ceiling and Wall Mount Screw Kit
1 – Product Card
ECW526
1 – ECW526 Cloud Managed Indoor Access Point
1 – Ceiling Mount Base
1 – Ceiling and Wall Mount Screw Kit
1 – T-rail Mount kit
1 – Product Card
ECW536
1 – ECW536 Cloud Managed Indoor Access Point
1 – Ceiling Mount Base
1 – Ceiling and Wall Mount Screw Kit
1 – T-rail Mount kit
1 – Product Card
ECW536S
1 – ECW536S Cloud Managed Indoor Access Point
1 – Ceiling Mount Base
1 – Ceiling and Wall Mount Screw Kit
1 – T-rail Mount kit
1 – Product Card

Compliance Regulatory


ECW115/ECW120/ECW130/ECW160/ECW230/ECW260/ECW230S/ECW270/ECW336
FCC
CE
IC
ECW526/ECW536/ECW510/ECW520
FCC
CE
IC
UKCA
VCCI
AU
ECW536S
FCC
CE
IC
UKCA
ECW210L/ECW212L/ECW516L
FCC
CE
IC
UKCA
UK PSTI
AU
ECW220
FCC
CE
IC
VCCI
AU
ECW215/ECW220S/ECW260
FCC
CE
IC
VCCI

Antenna Patterns, and Product Views

Cloud5 2x2 Wallplate(ECW115) Antenna Patterns


2.4GHz

H-Plane

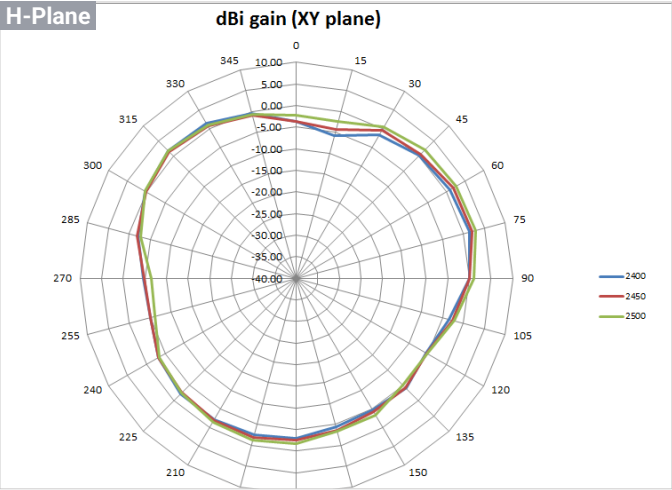


2.4GHz

E-Plane

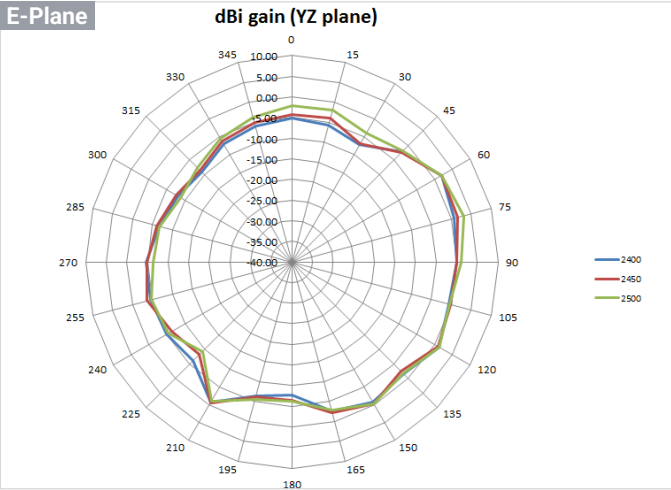


5GHz

H-Plane

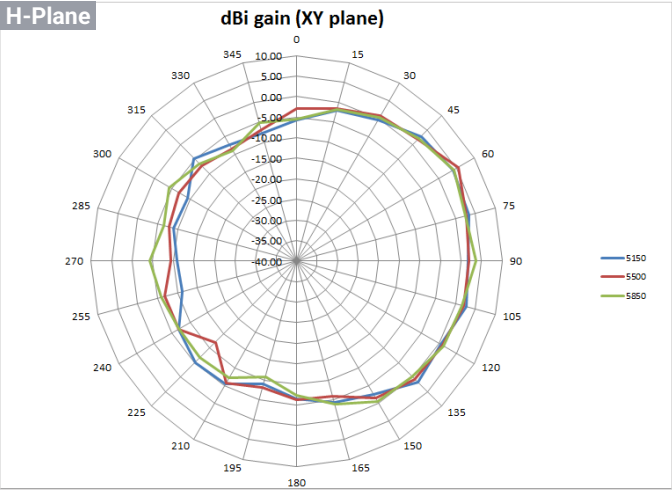


5GHz

E-Plane

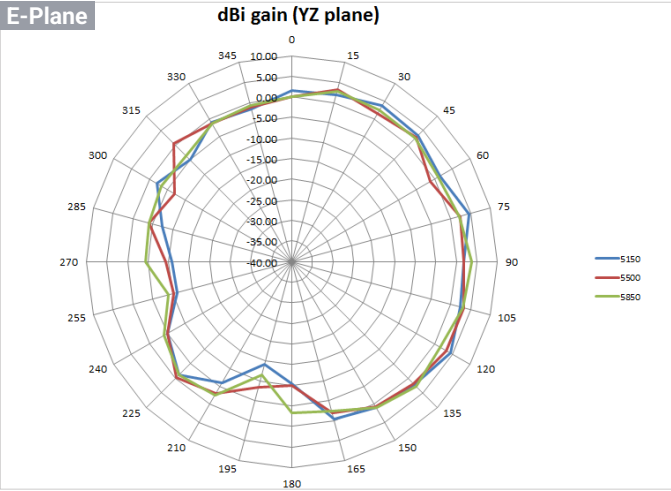

Antenna Patterns, and Product Views

Cloud5 2x2 Wallplate(ECW115) Product Views

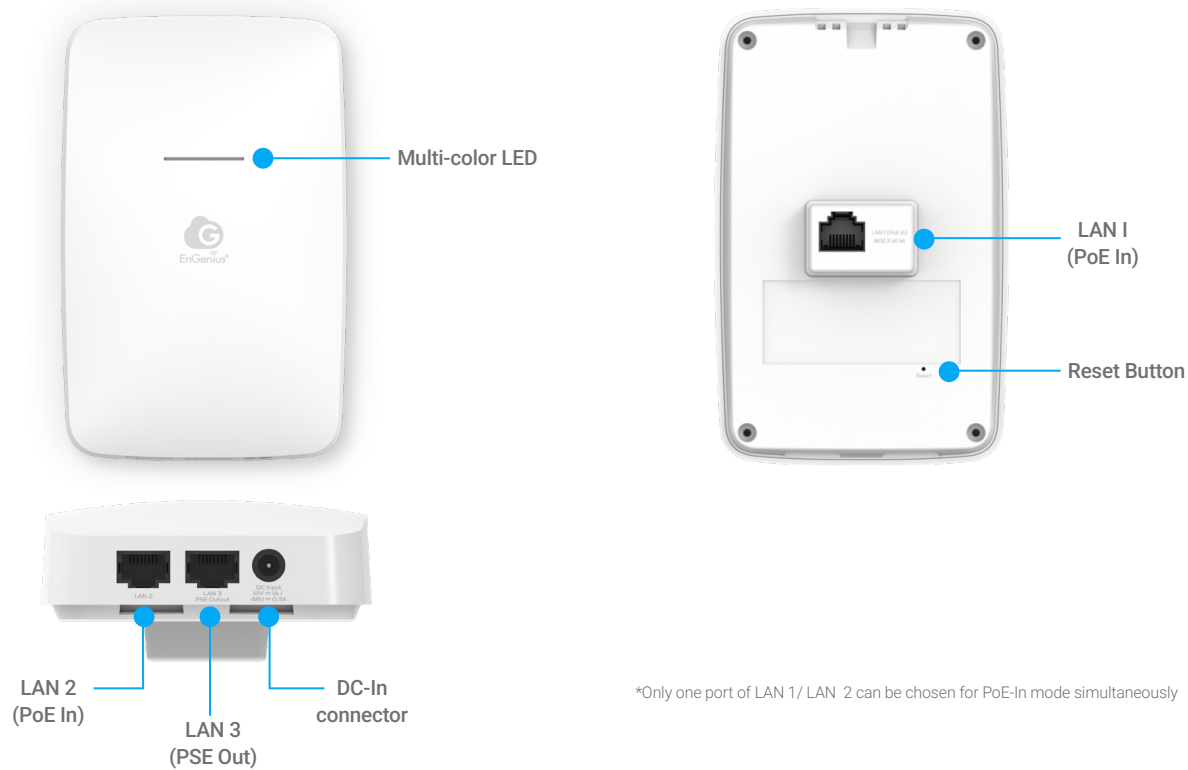


Antenna Patterns, and Product Views

Cloud5 2x2 (ECW120) Antenna Patterns


2.4GHz

H-Plane

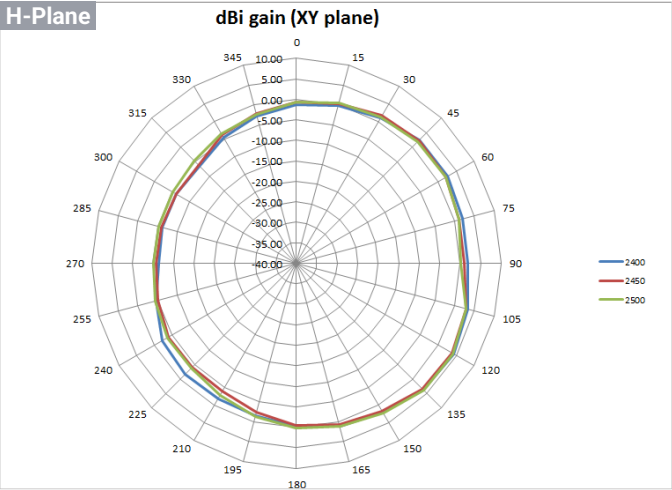


2.4GHz

E-Plane

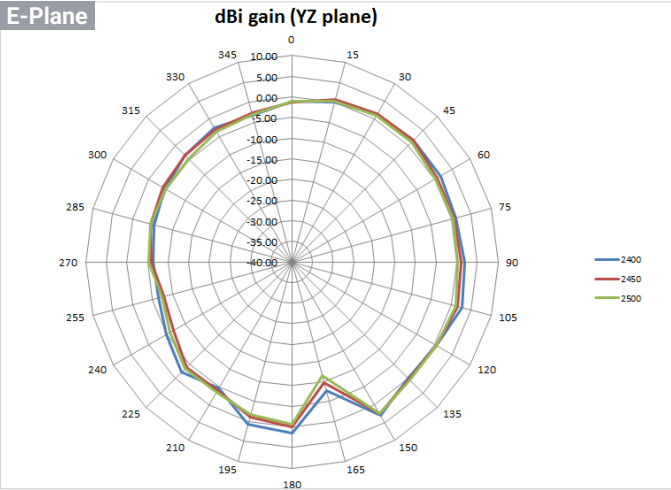


5GHz

H-Plane

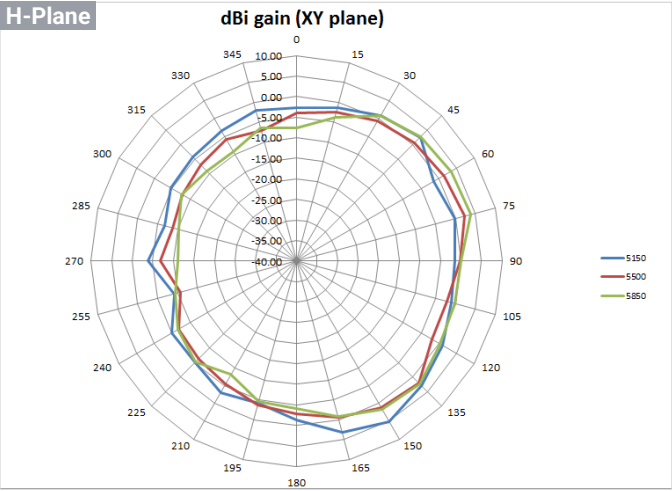



5GHz

E-Plane

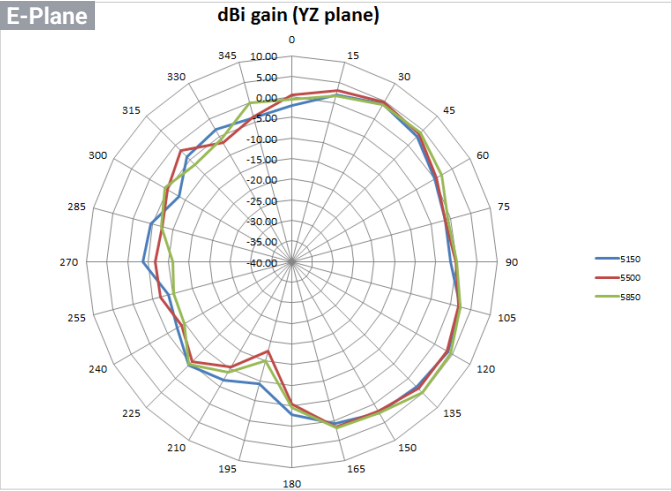

Antenna Patterns, and Product Views

Cloud5 2x2 (ECW120) Product Views

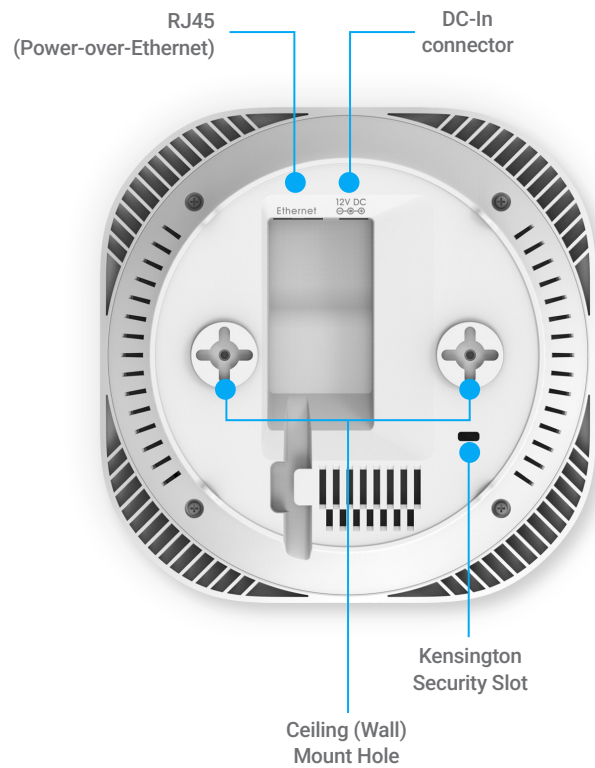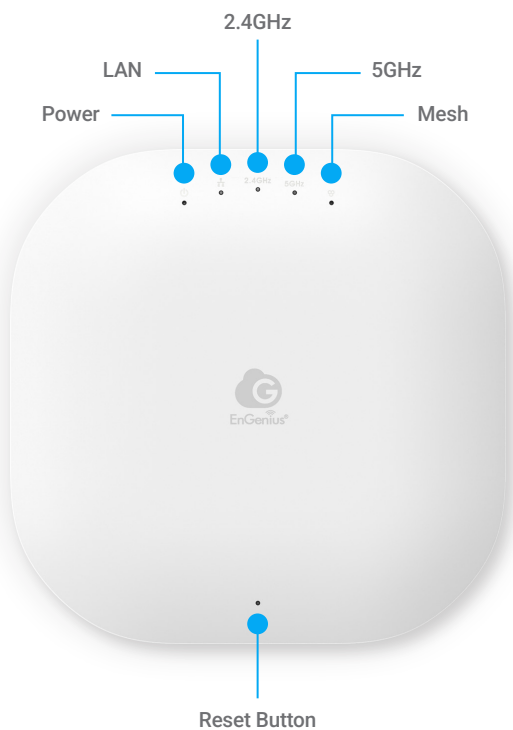


Antenna Patterns, and Product Views

Cloud5 4x4 (ECW130) Antenna Patterns


2.4GHz

H-Plane

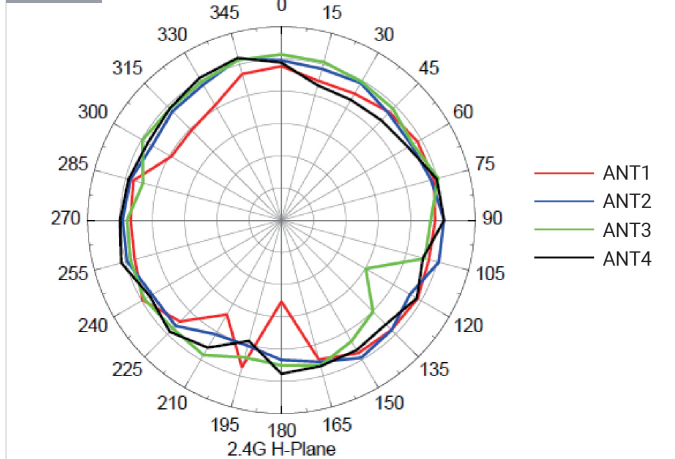


2.4GHz

E-Plane

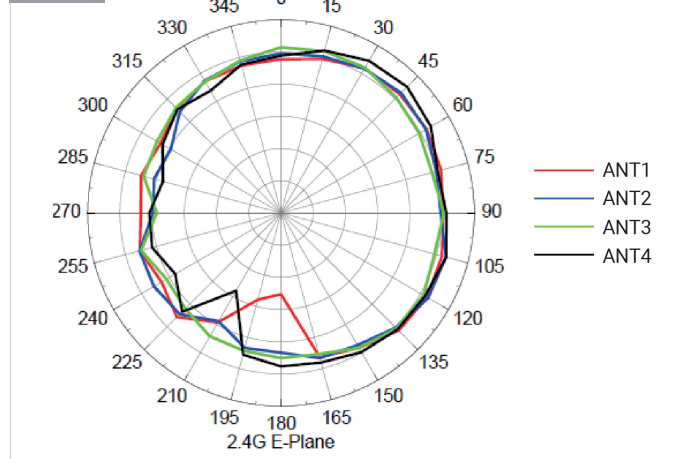


5GHz

H-Plane

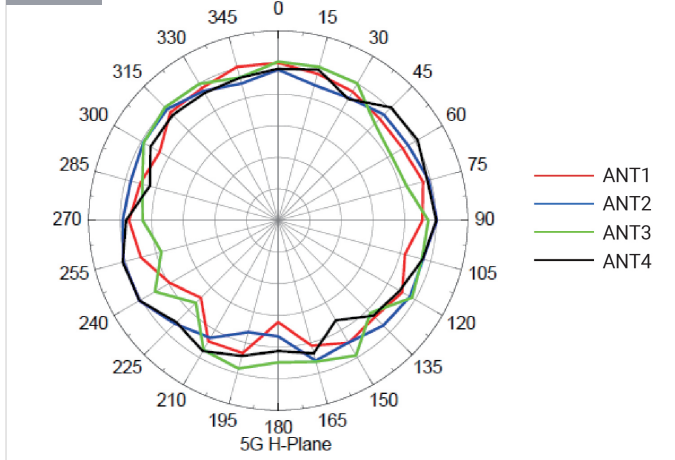


5GHz

E-Plane

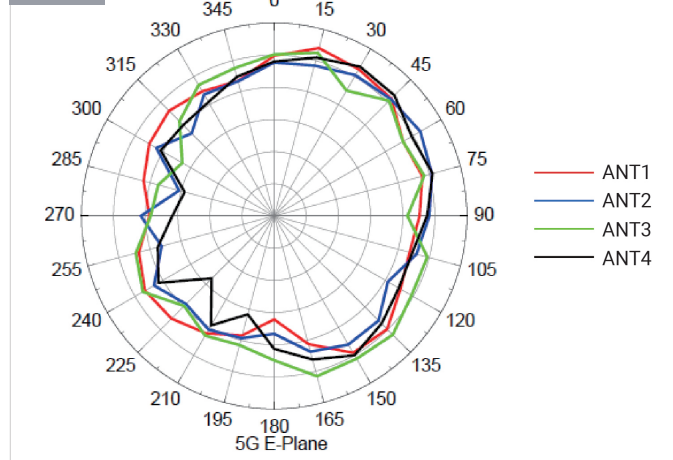

Antenna Patterns, and Product Views

Cloud5 4x4 (ECW130) Product Views

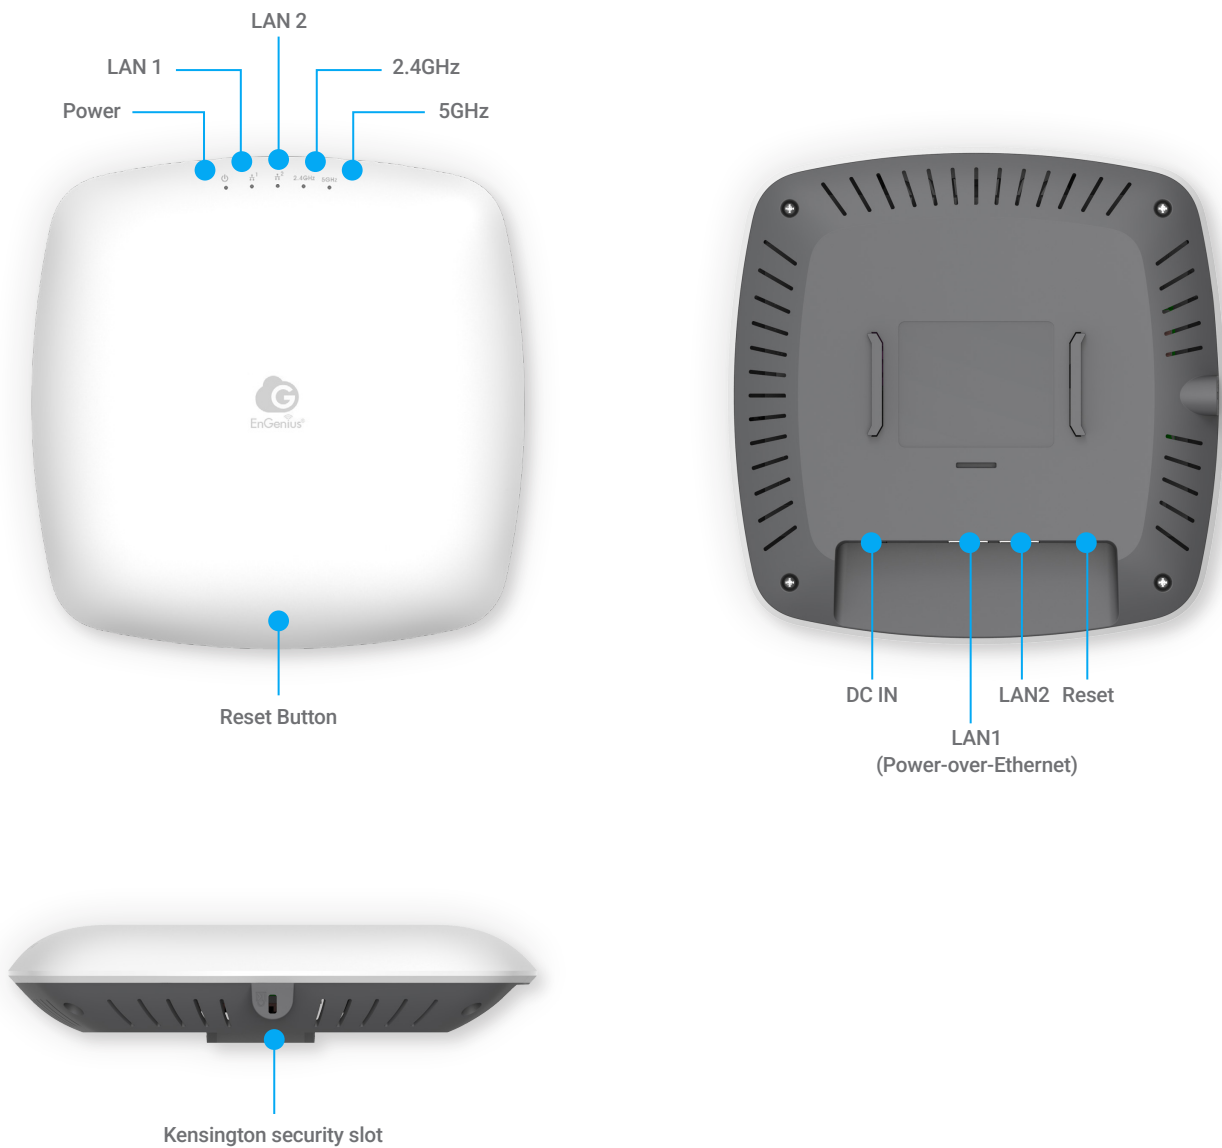


Antenna Patterns, and Product Views

Cloud6 2x2 Lite (ECW210L) Antenna Patterns


2.4GHz

H-Plane

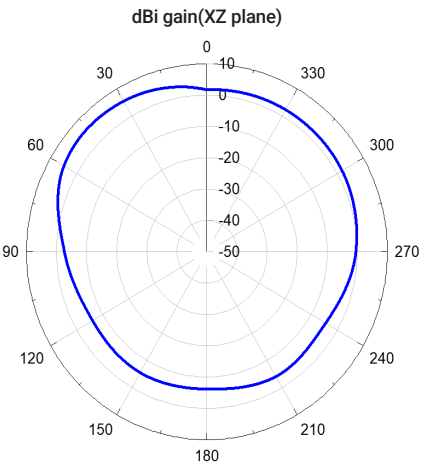


2.4GHz

E-Plane

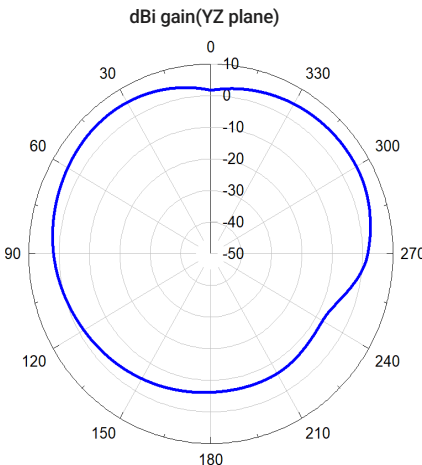


5GHz

H-Plane

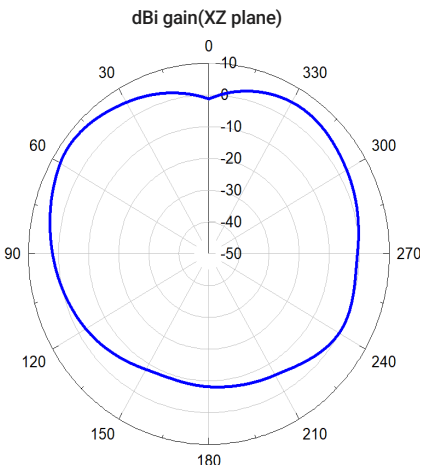


5GHz

E-Plane

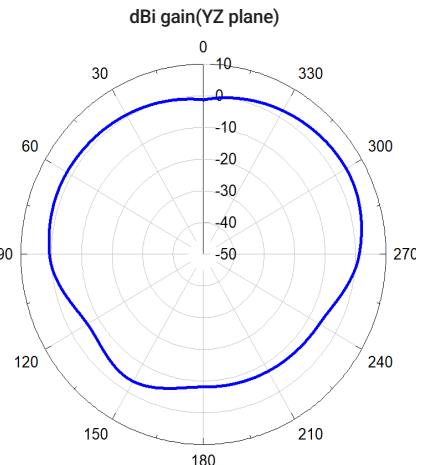

Antenna Patterns, and Product Views

Cloud6 2x2 Lite (ECW210L) Product Views

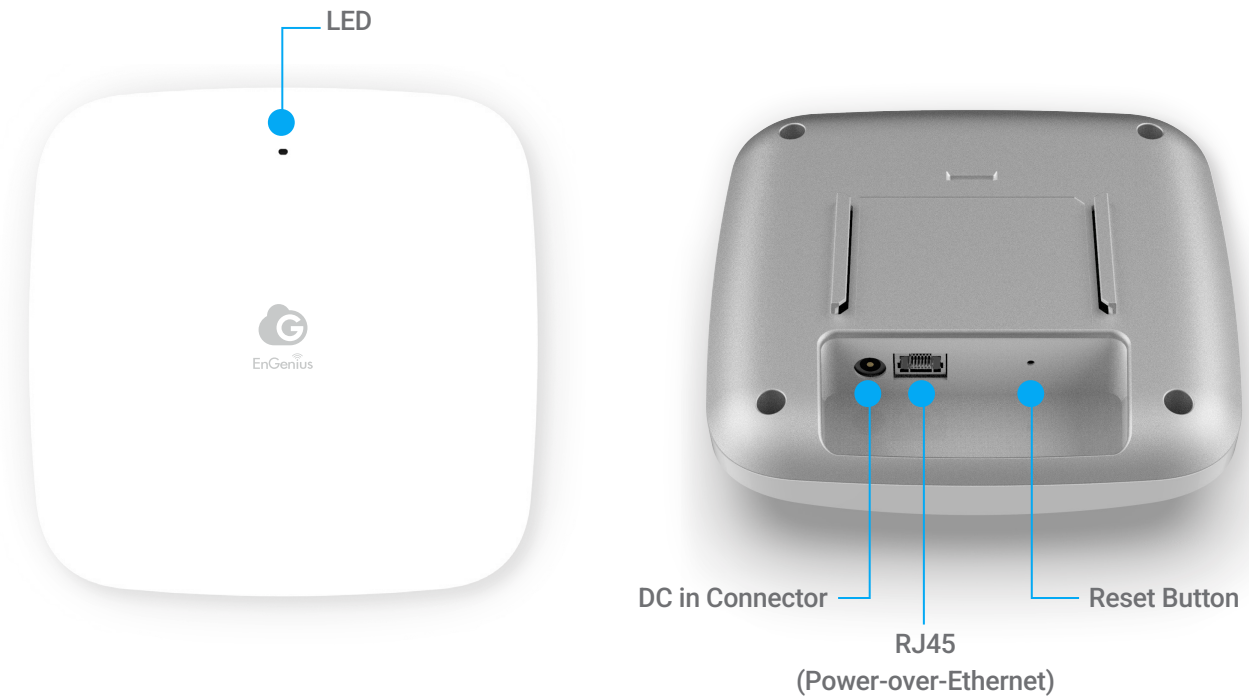


Antenna Patterns, and Product Views

Cloud6 4x4 Lite (ECW212L) Antenna Patterns


2.4GHz

H-Plane

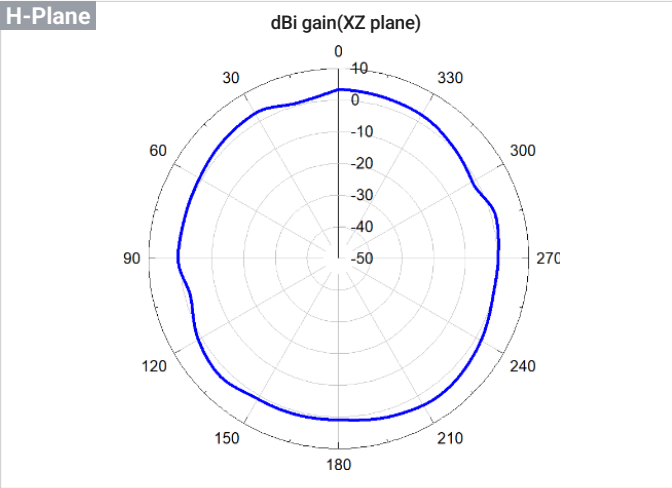


2.4GHz

E-Plane

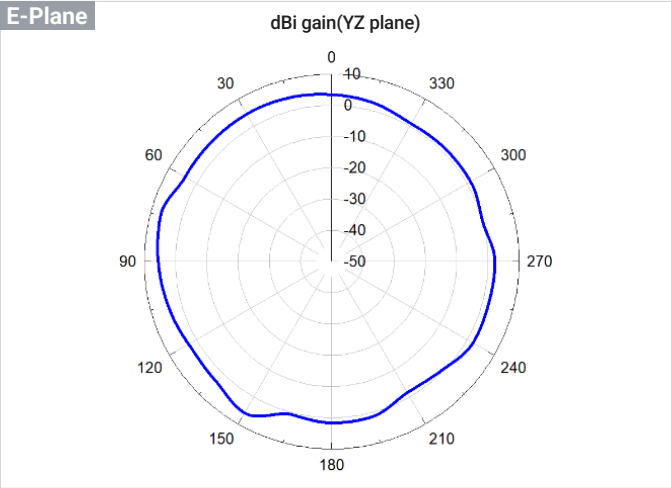


5GHz

H-Plane

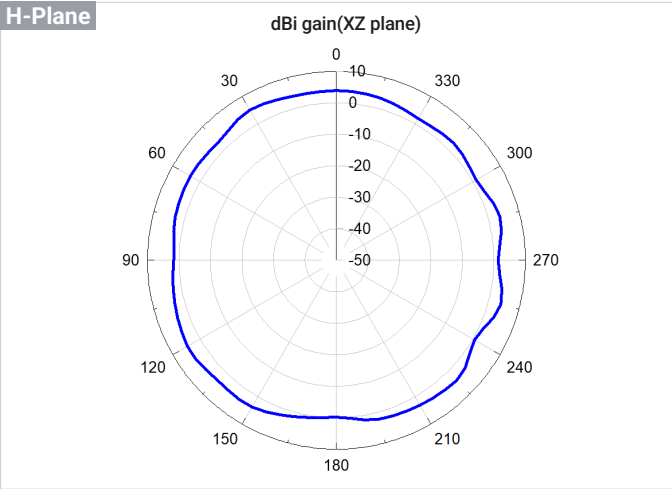

5GHz


E-Plane

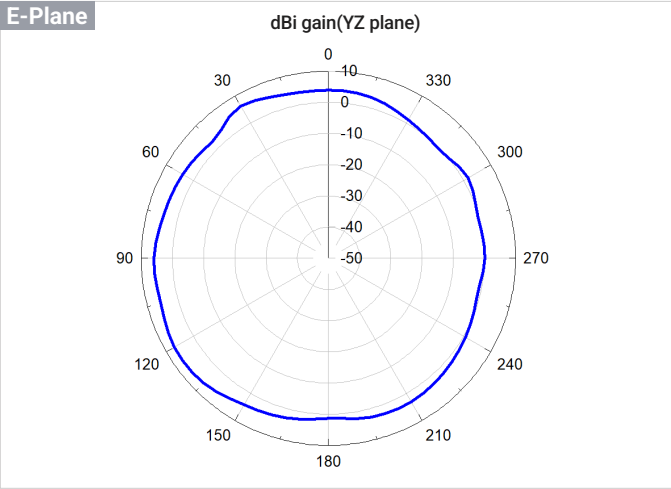

Antenna Patterns, and Product Views

Cloud6 4x4 Lite (ECW212L) Product Views

LAN Port LED
Power LED
2.4GHz LED
5GHz LED

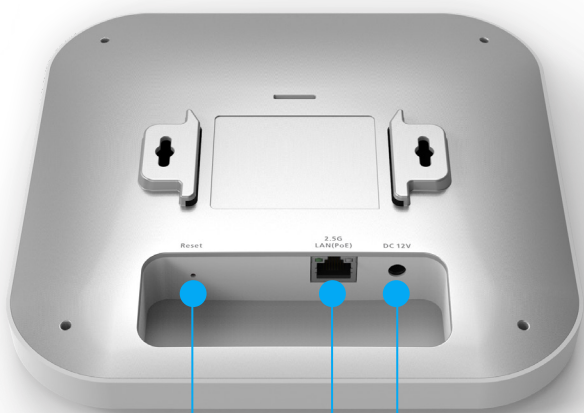

Reset Button
LAN(PoE, 802.3at)
Power Connector




Kensington Security Slot

Antenna Patterns, and Product Views

Cloud6 2x2 Wallplate (ECW215) Antenna Patterns


2.4GHz

H-Plane

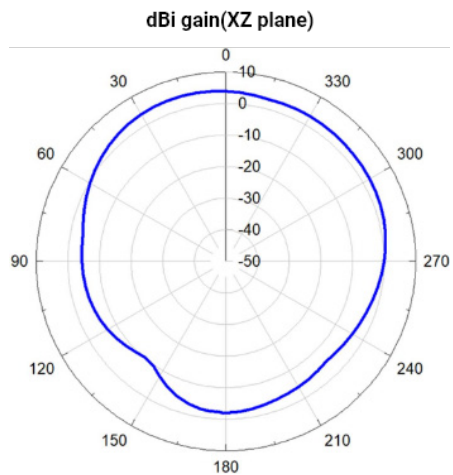


2.4GHz

E-Plane

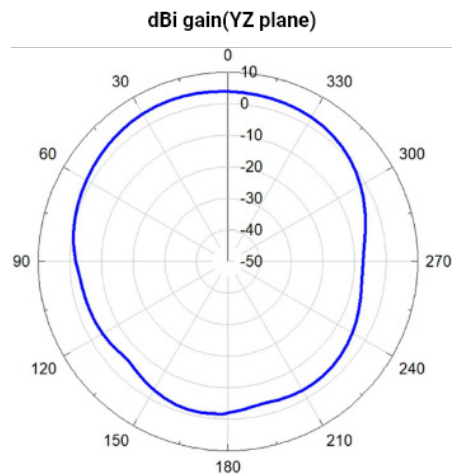


5GHz

H-Plane

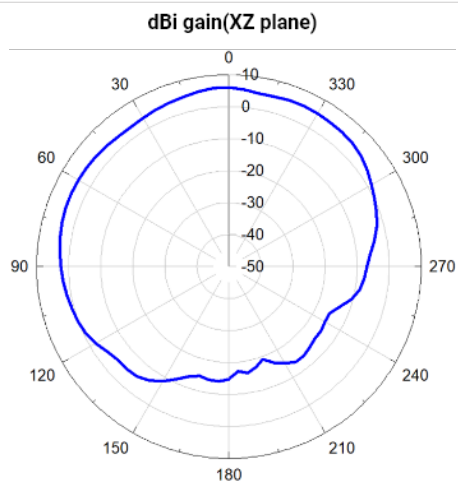


5GHz

E-Plane

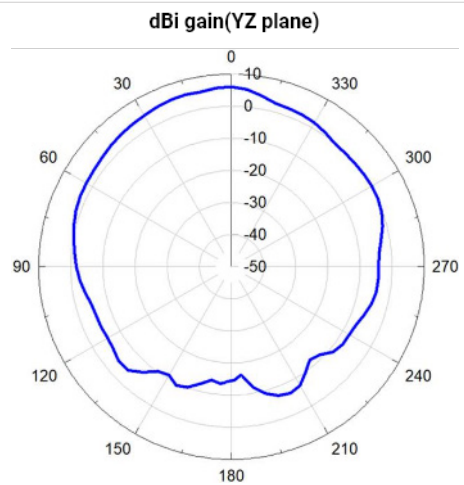

Antenna Patterns, and Product Views

Cloud6 2x2 Wallplate (ECW215) Product Views

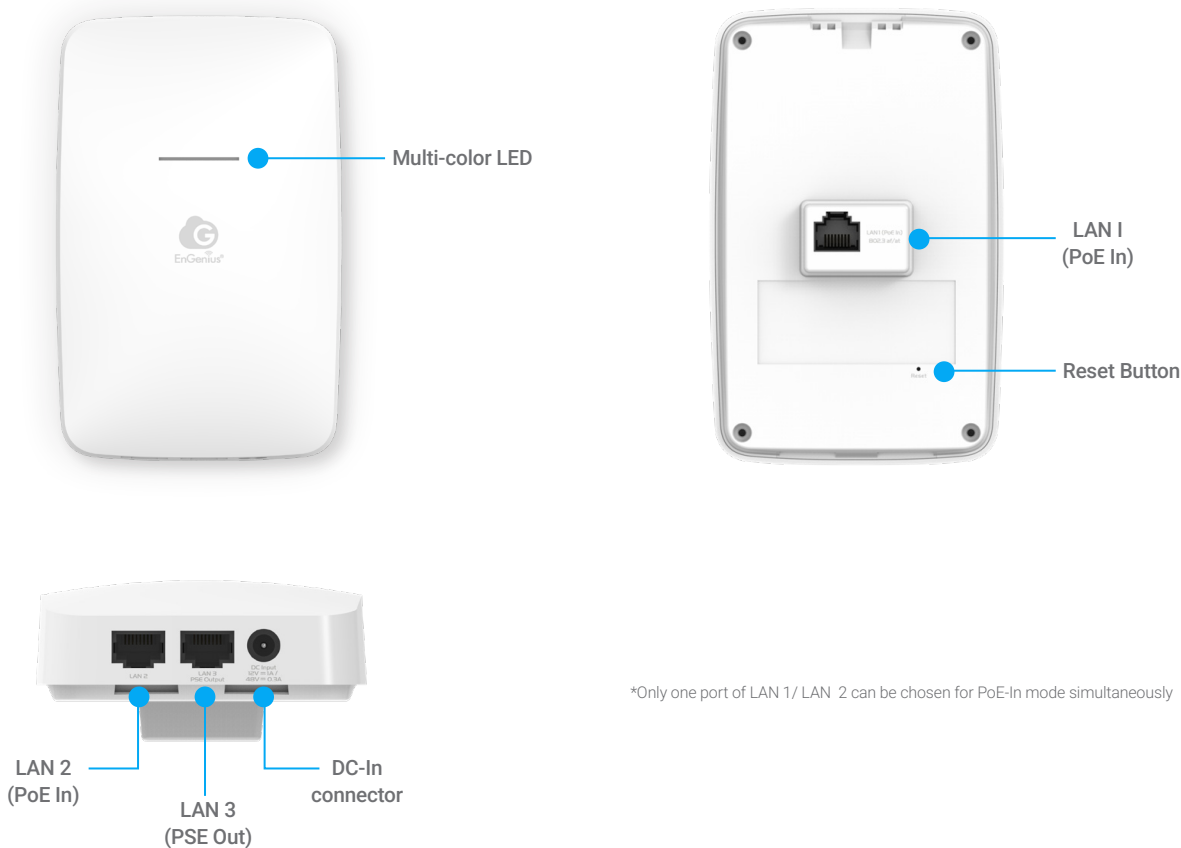


Antenna Patterns, and Product Views

Cloud6 2x2 (ECW220) Antenna Patterns


2.4GHz

H-Plane

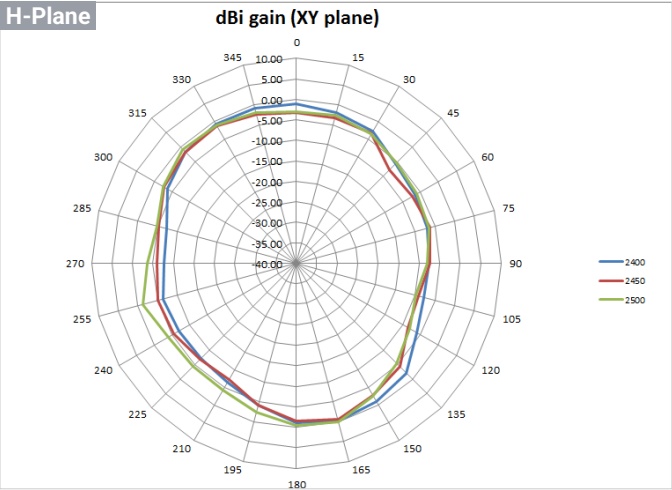


2.4GHz

E-Plane

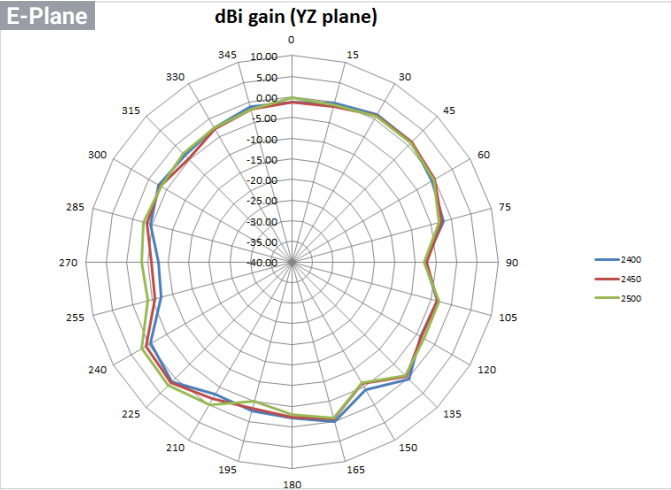


5GHz

H-Plane

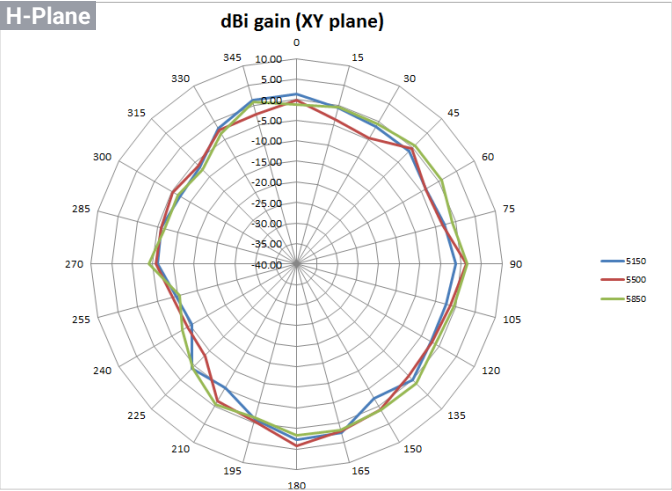


5GHz

E-Plane

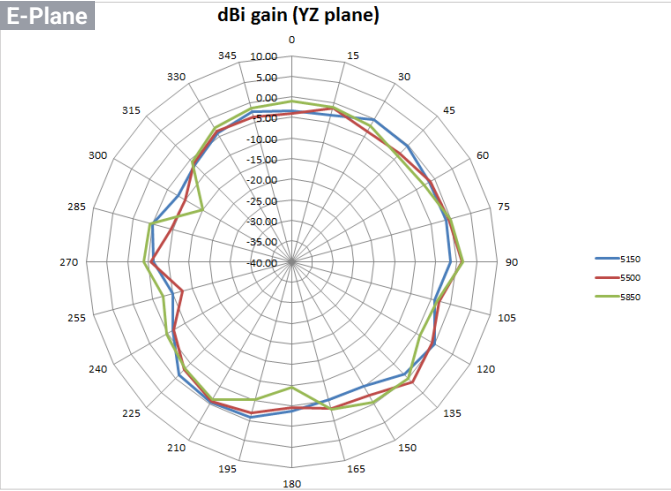

Antenna Patterns, and Product Views

Cloud6 2x2 (ECW220) Product Views

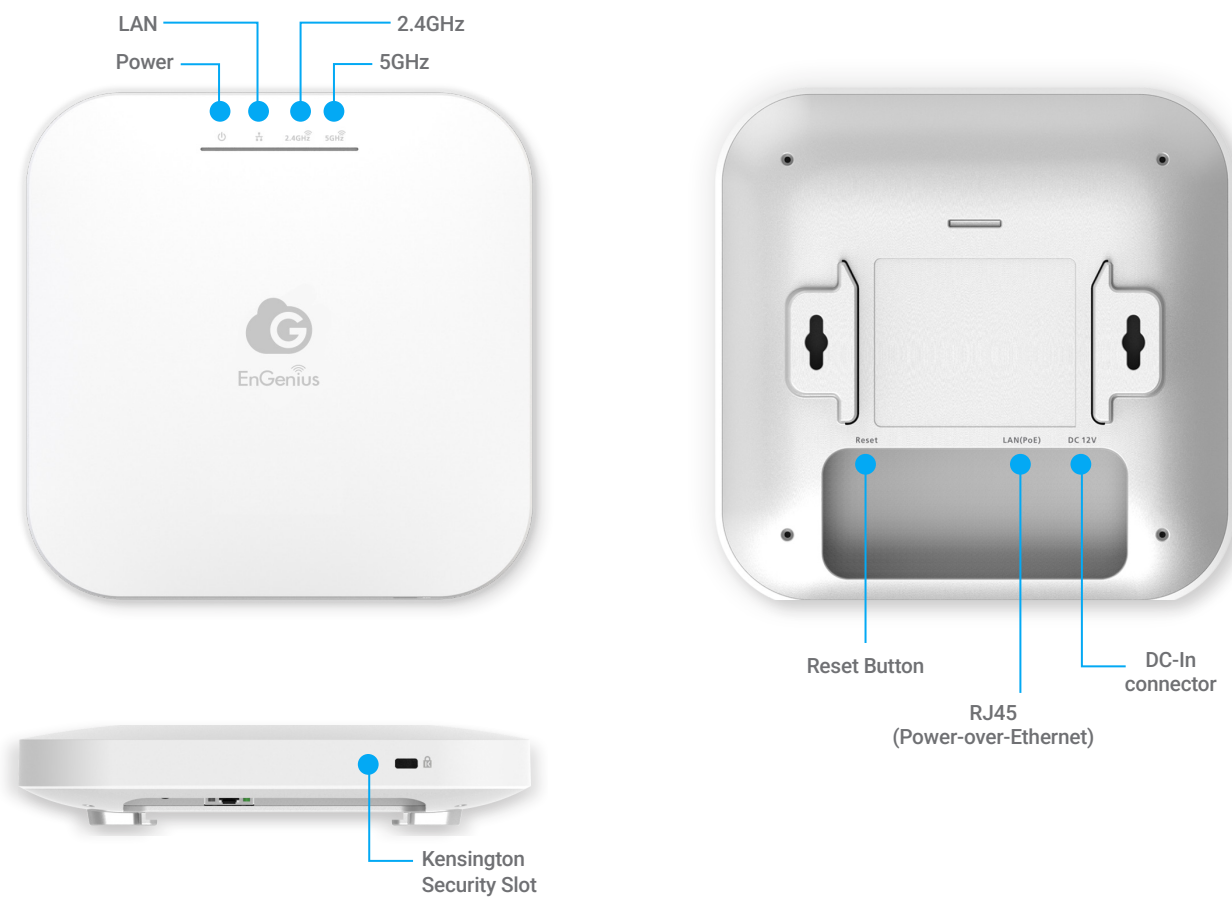


Antenna Patterns, and Product Views

Cloud6 4x4 (ECW230) Antenna Patterns


2.4GHz

H-Plane

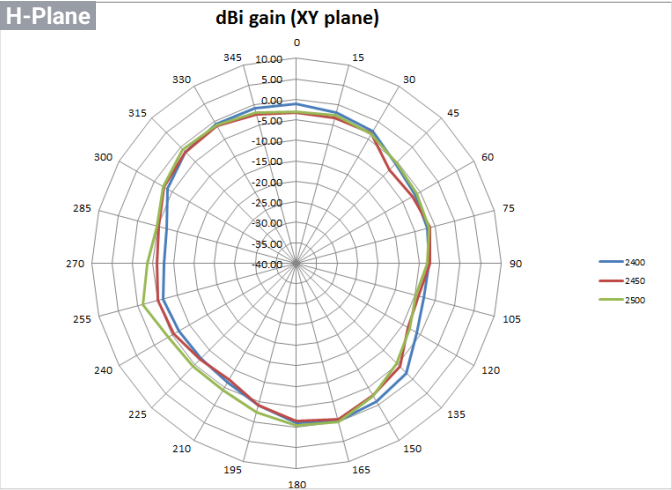


2.4GHz

E-Plane

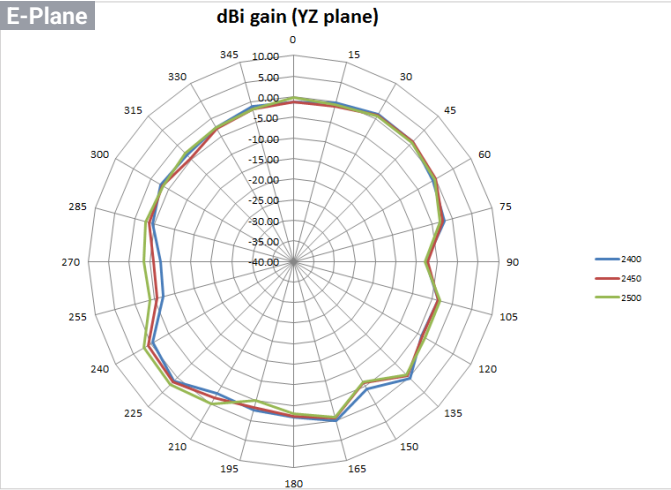


5GHz

H-Plane

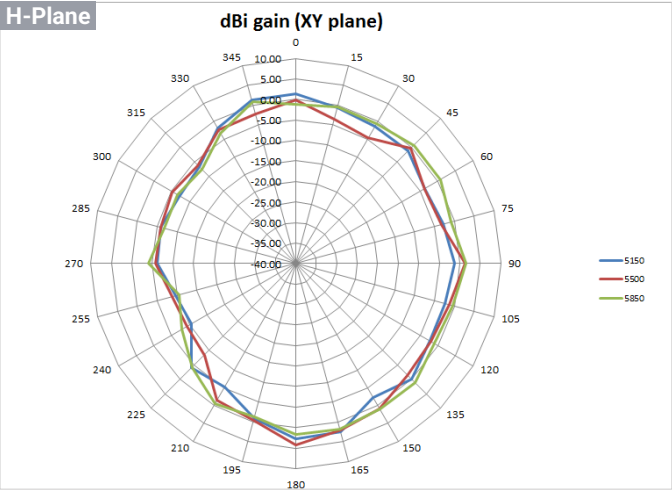


5GHz

E-Plane

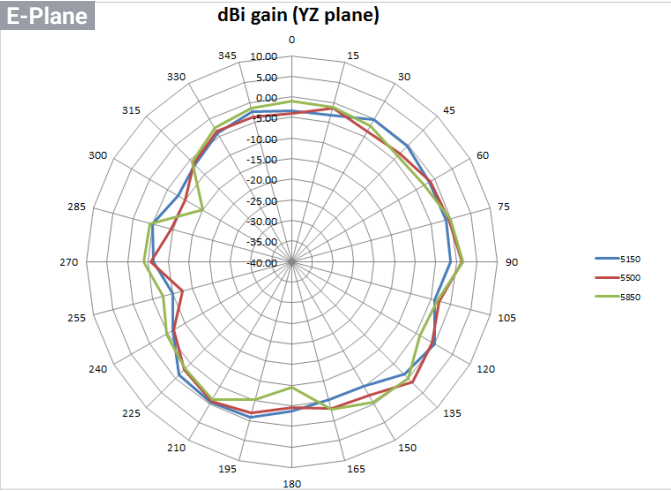

Antenna Patterns, and Product Views

Cloud6 4x4 (ECW230) Product Views

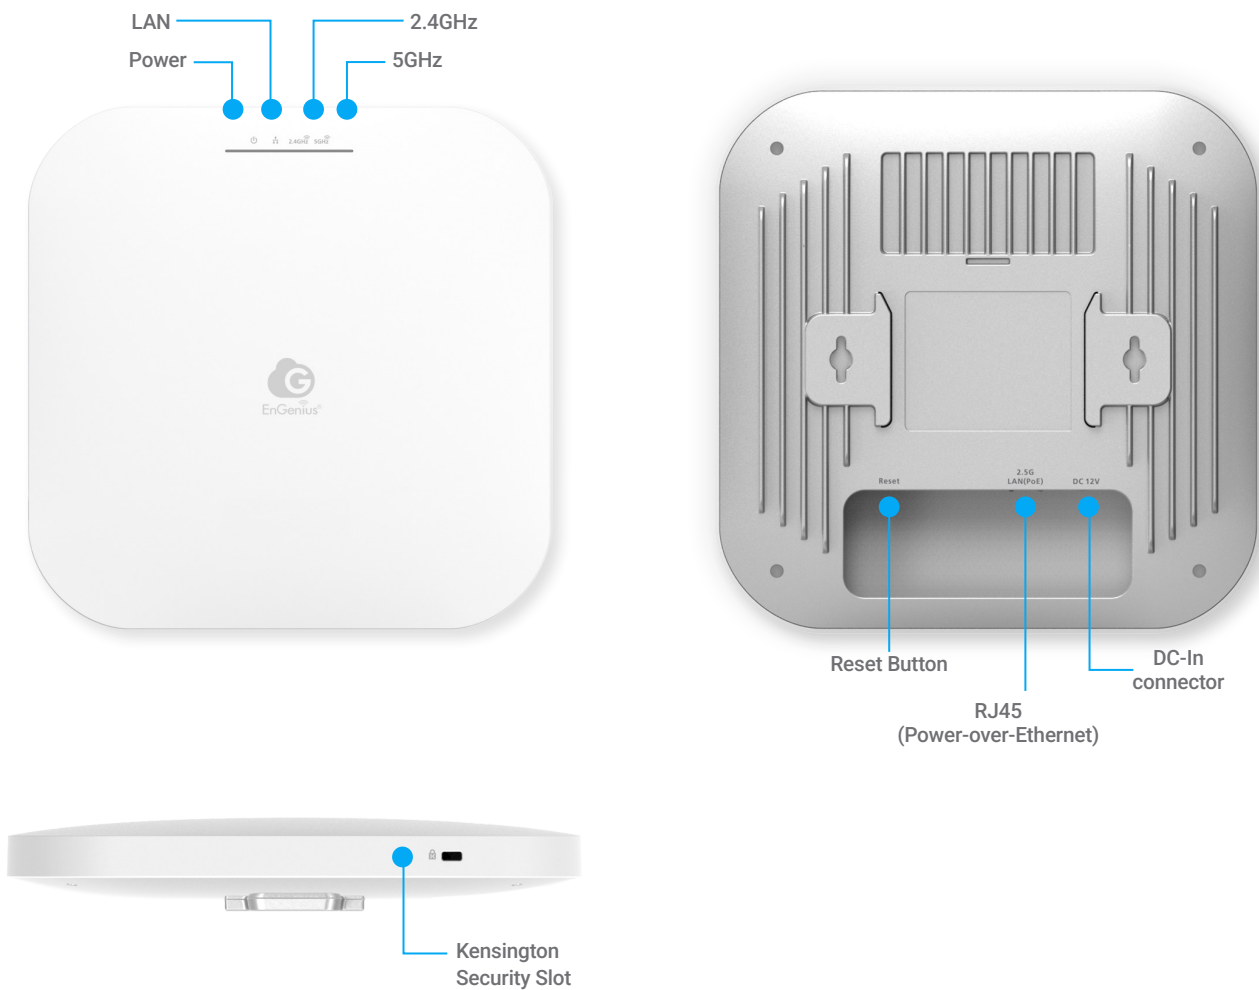


Antenna Patterns, and Product Views

Cloud6 2x2 S (ECW220S) Antenna Patterns


2.4GHz

H-Plane

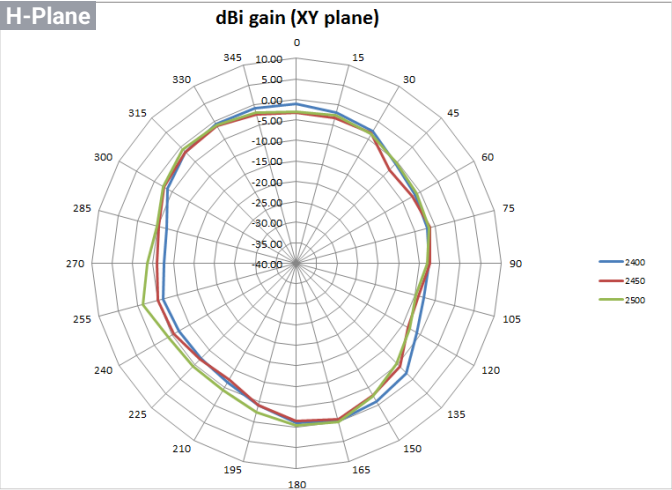


2.4GHz

E-Plane

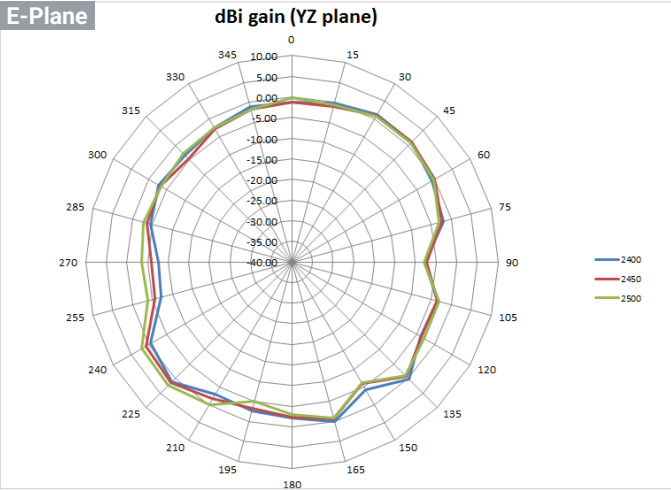


5GHz

H-Plane

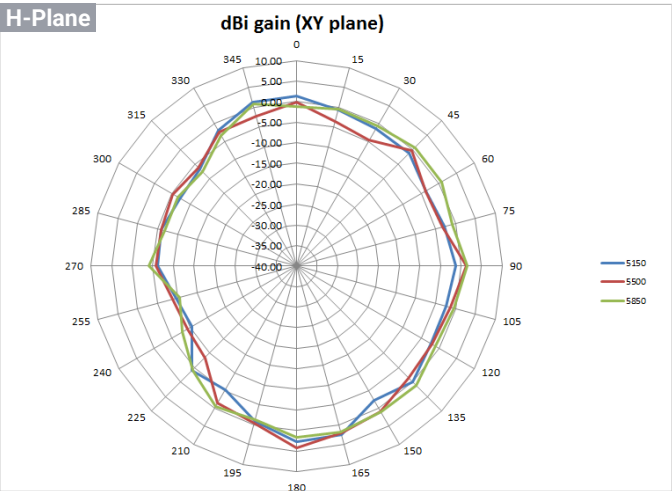


5GHz

E-Plane

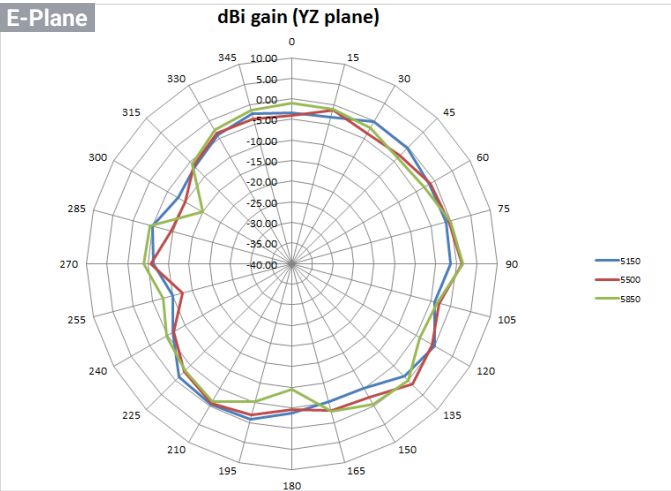

Antenna Patterns, and Product Views

Cloud6 2x2 S (ECW220S) Product Views

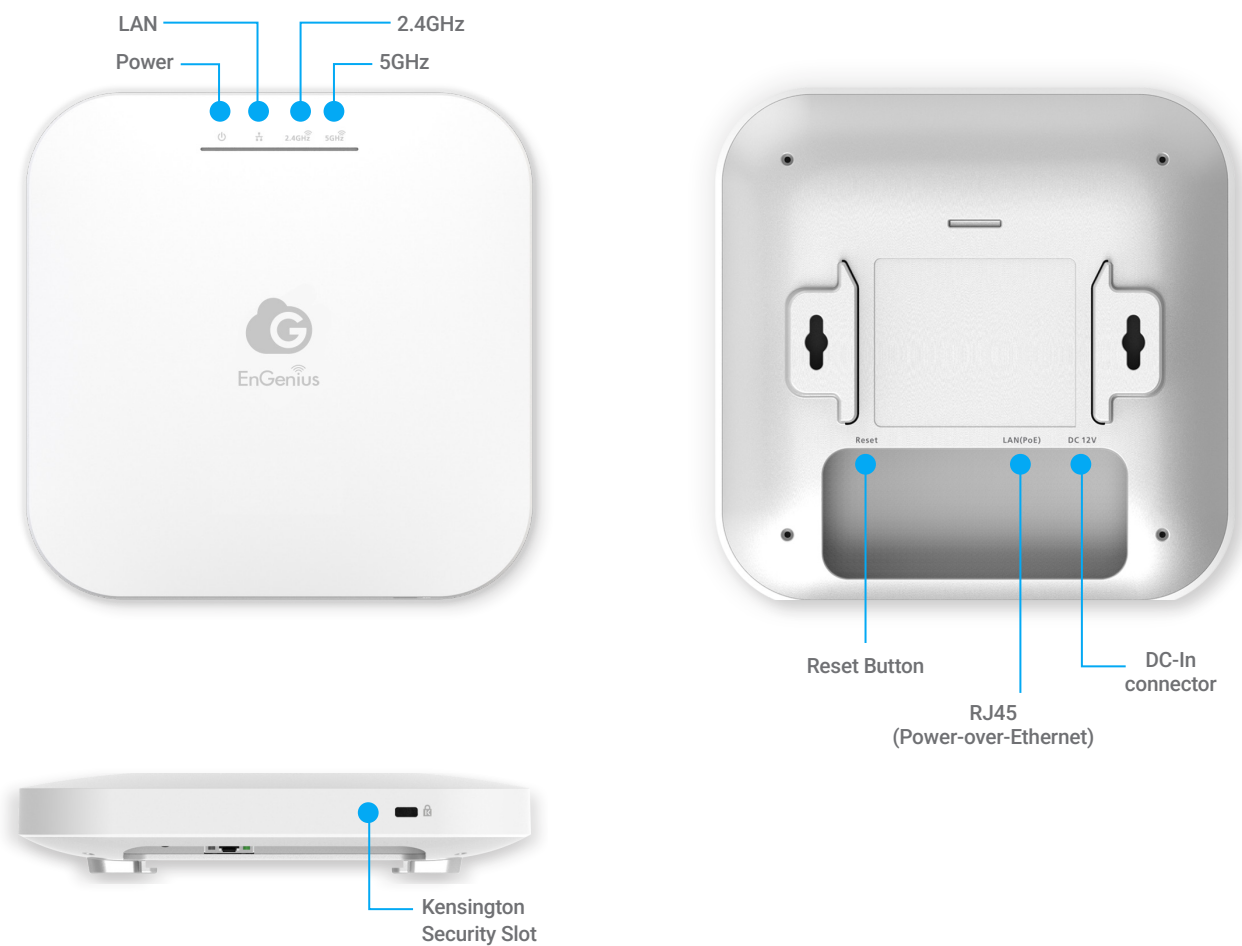


Antenna Patterns, and Product Views

Cloud6 4x4 S (ECW230S) Antenna Patterns


2.4GHz

H-Plane

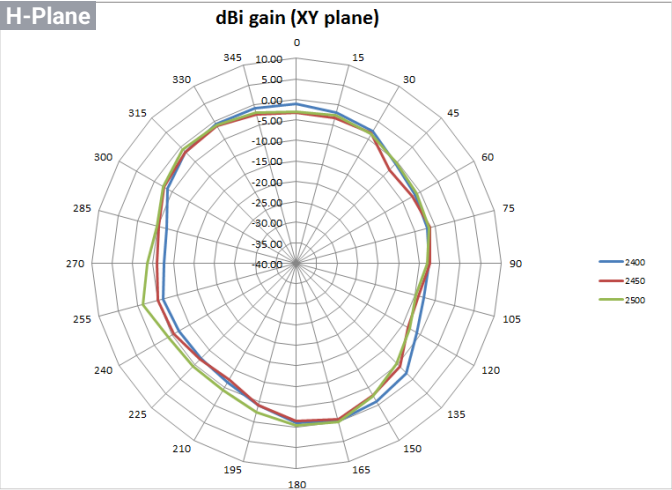


2.4GHz

E-Plane

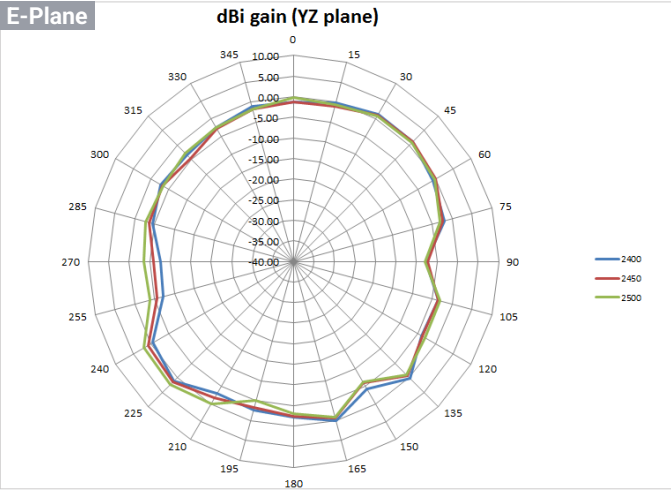


5GHz

H-Plane

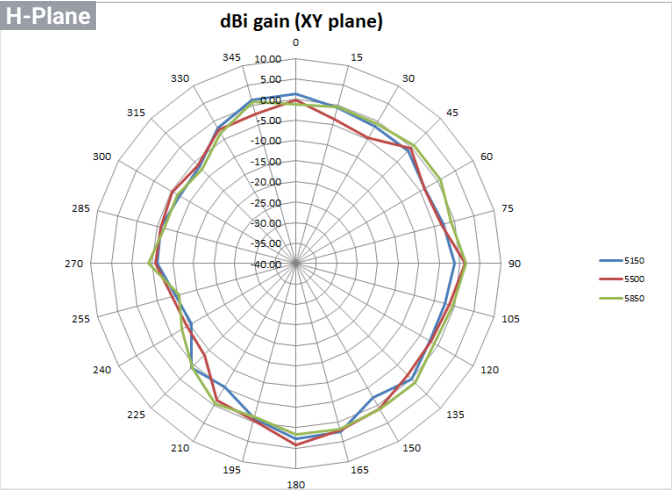


5GHz

E-Plane

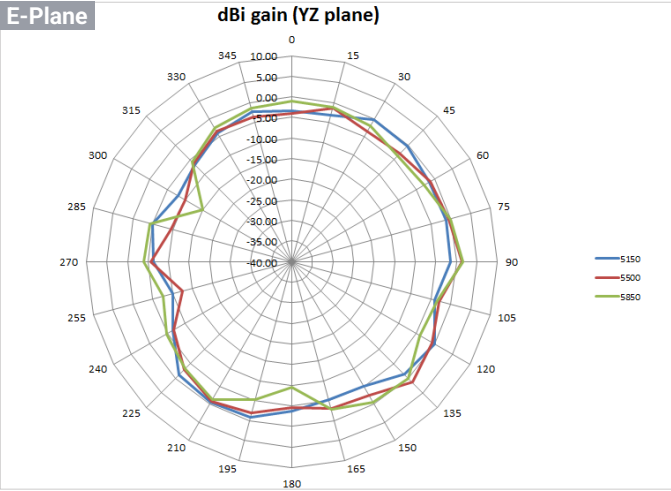

Antenna Patterns, and Product Views

Cloud6 4x4 S (ECW230S) Product Views

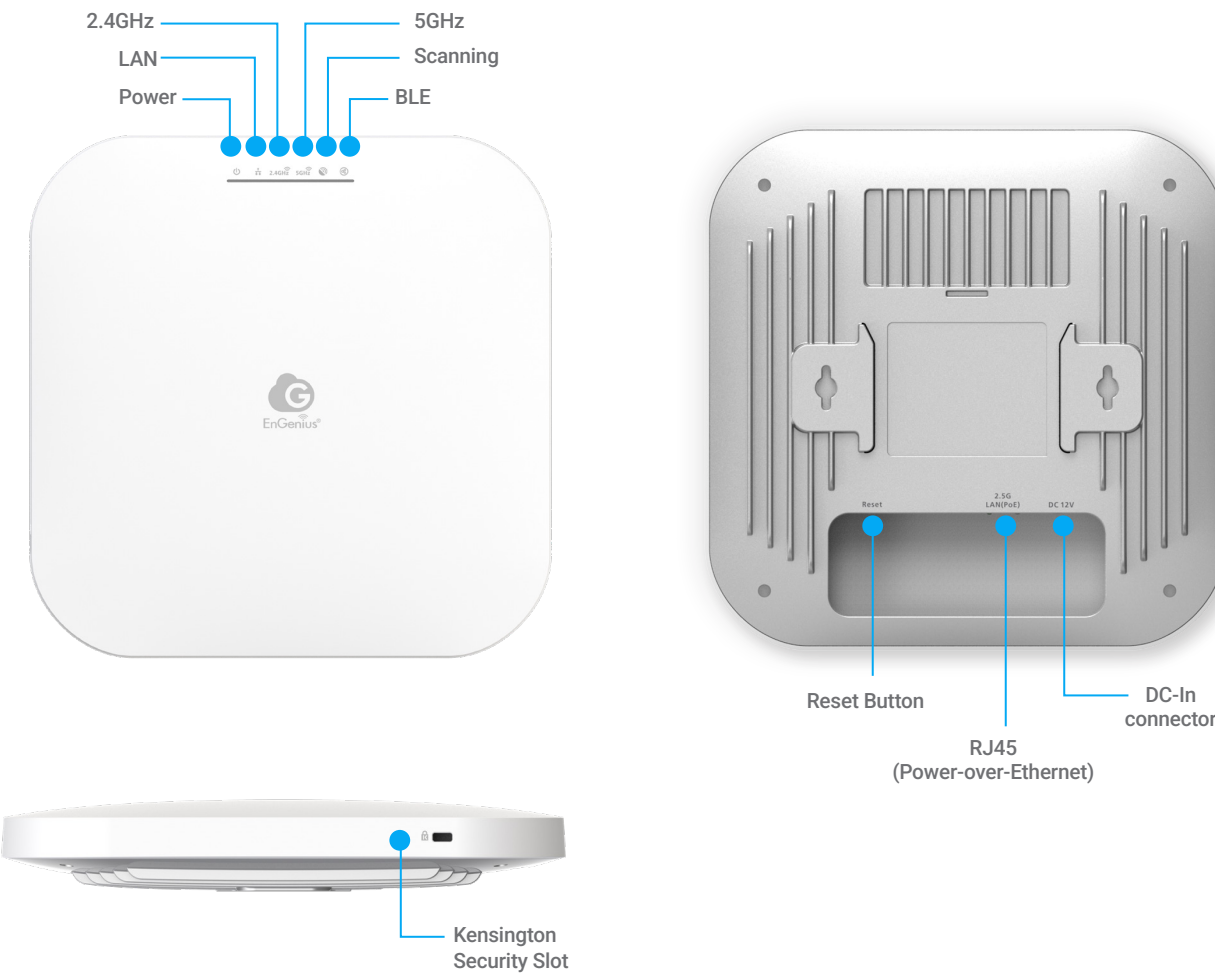


Antenna Patterns, and Product Views

Cloud6E 4x4x4 (ECW336) Antenna Patterns


2.4GHz

H-Plane

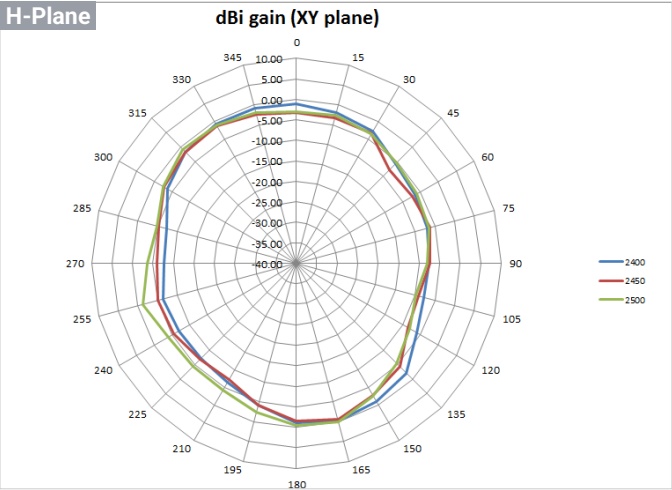


2.4GHz

E-Plane

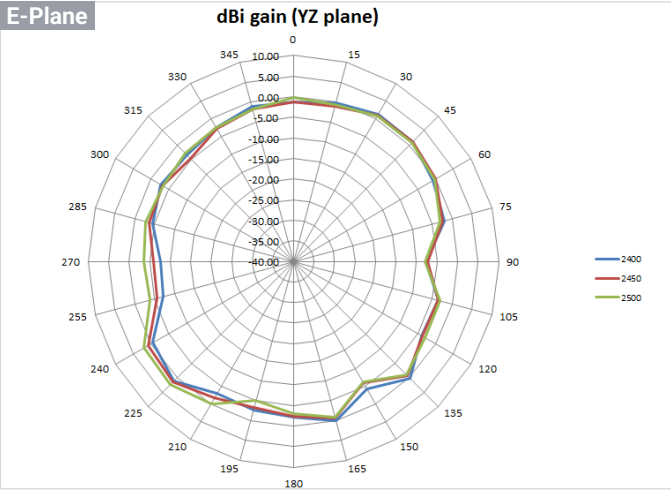


5GHz

H-Plane

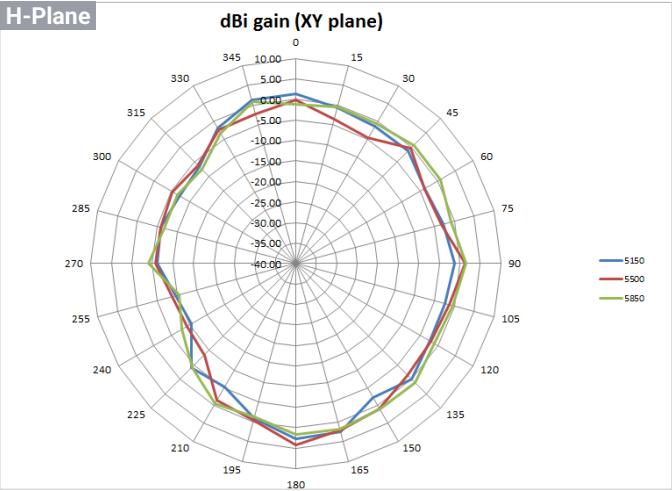


5GHz

E-Plane

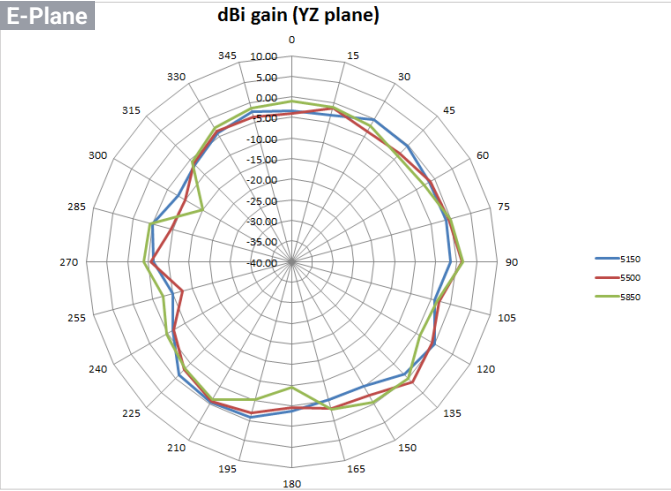


6GHz

H-Plane

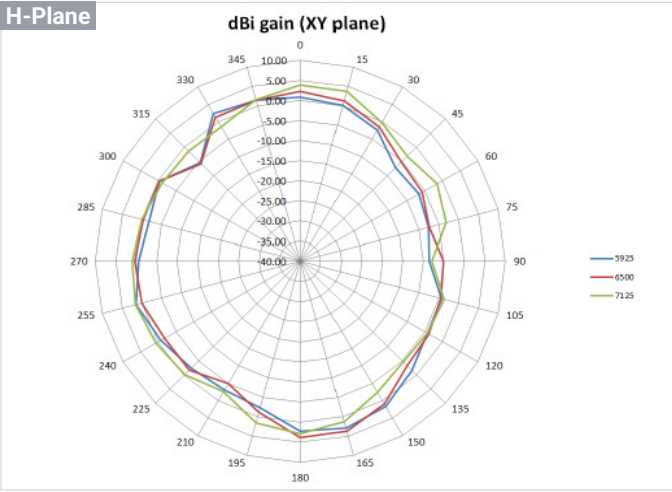


6GHz

E-Plane

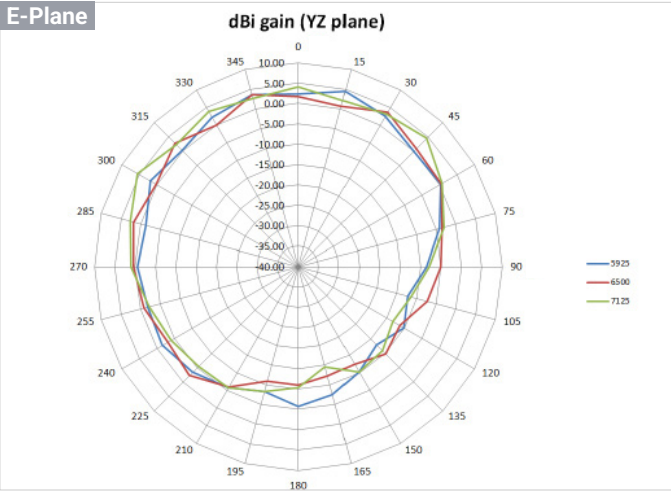

Antenna Patterns, and Product Views

Cloud6E 4x4x4 (ECW336) Product Views

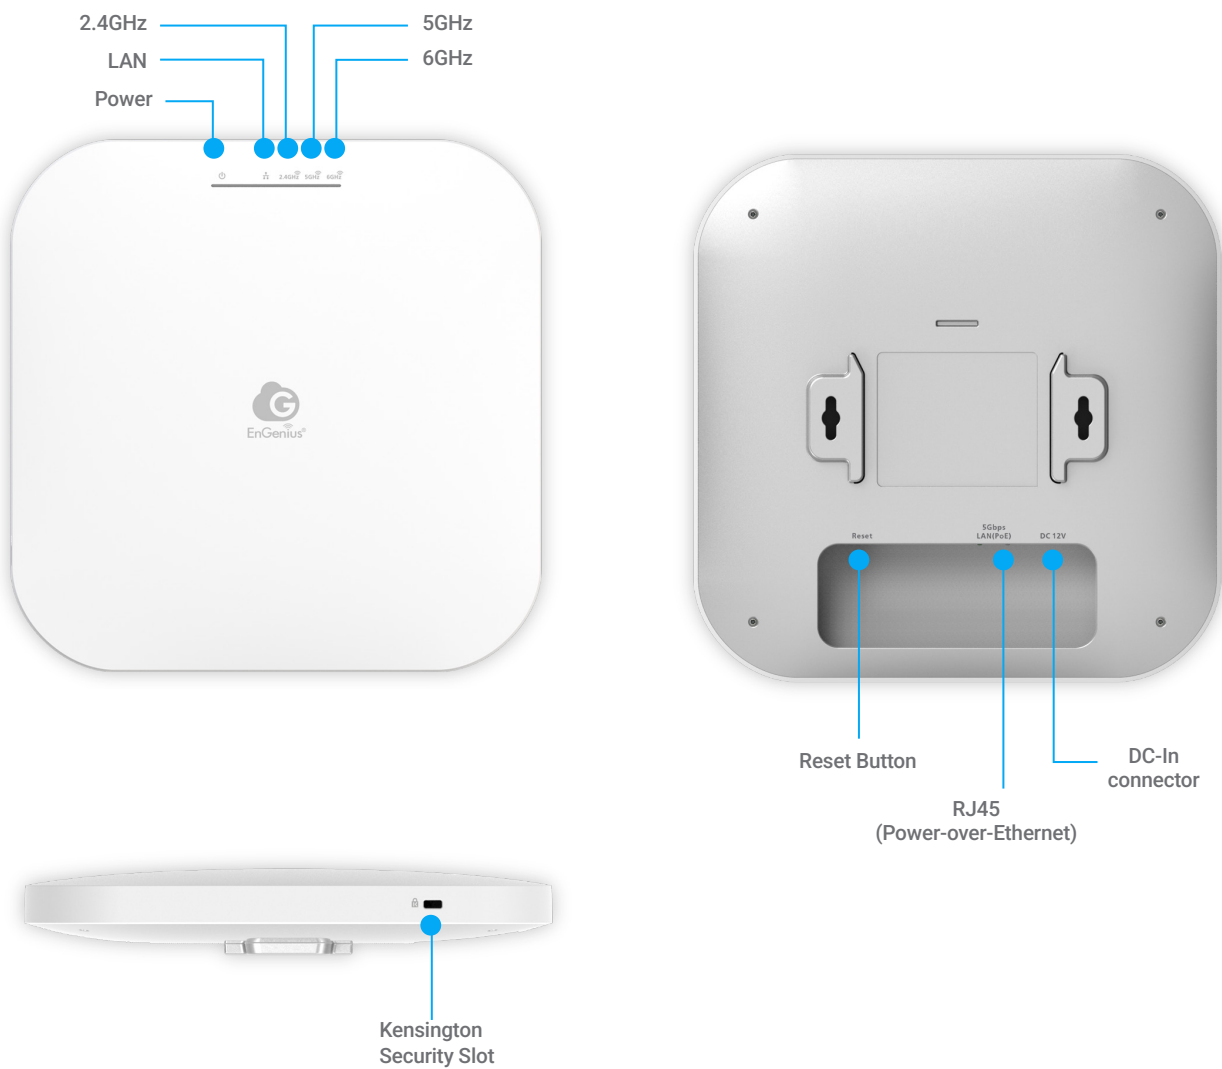


Antenna Patterns, and Product Views

Cloud7 2x3x3 Lite (ECW516L) Antenna Patterns


2.4GHz

H-Plane

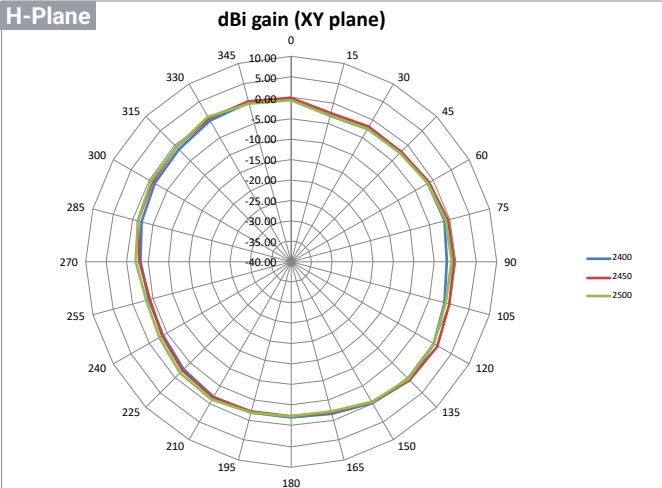


2.4GHz

E-Plane

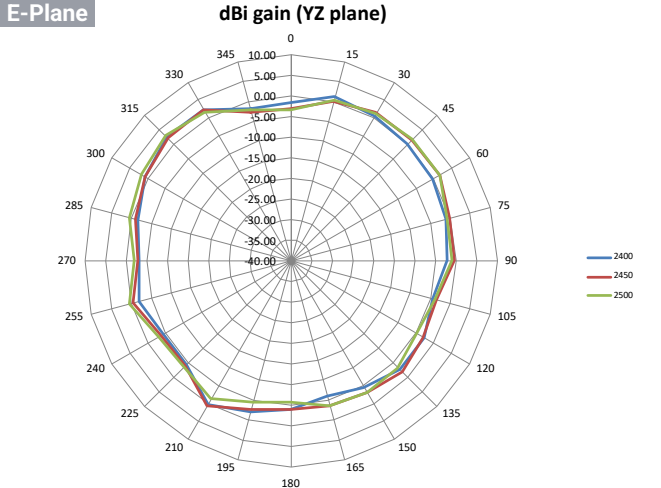


5GHz

H-Plane

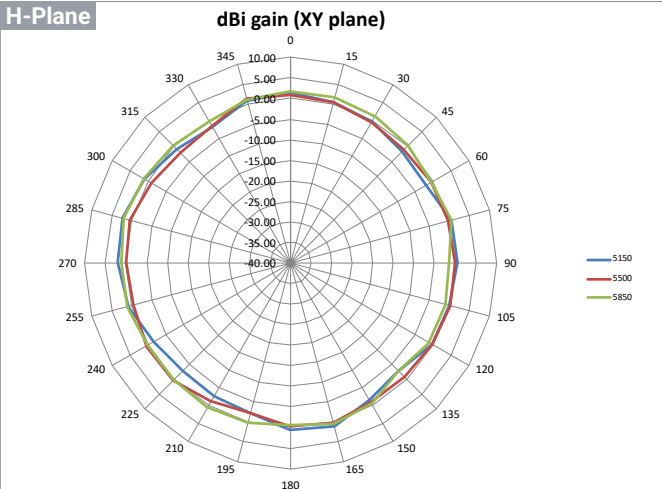


5GHz

E-Plane

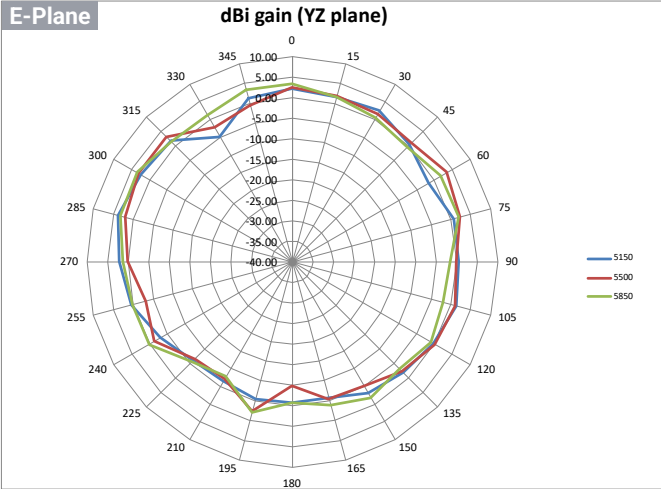


6GHz

H-Plane

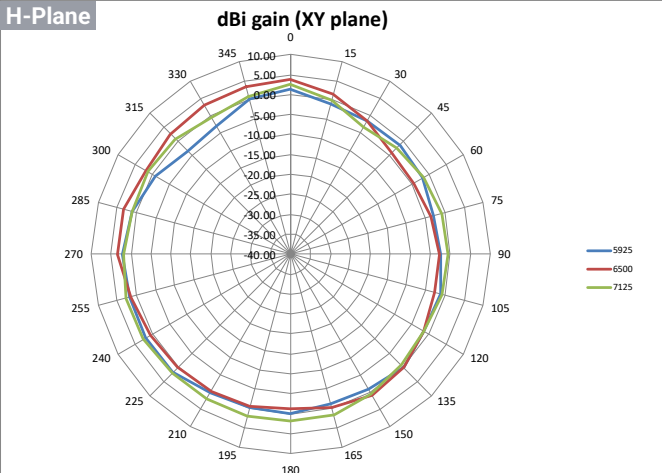


6GHz

E-Plane

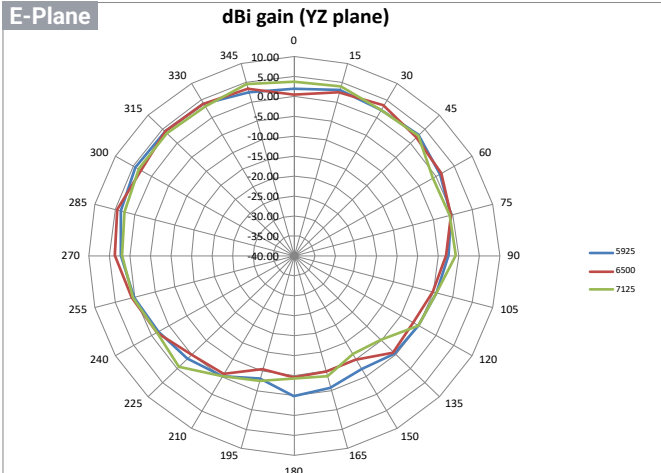

Antenna Patterns, and Product Views

Cloud7 2x3x3 Lite (ECW516L) Product Views

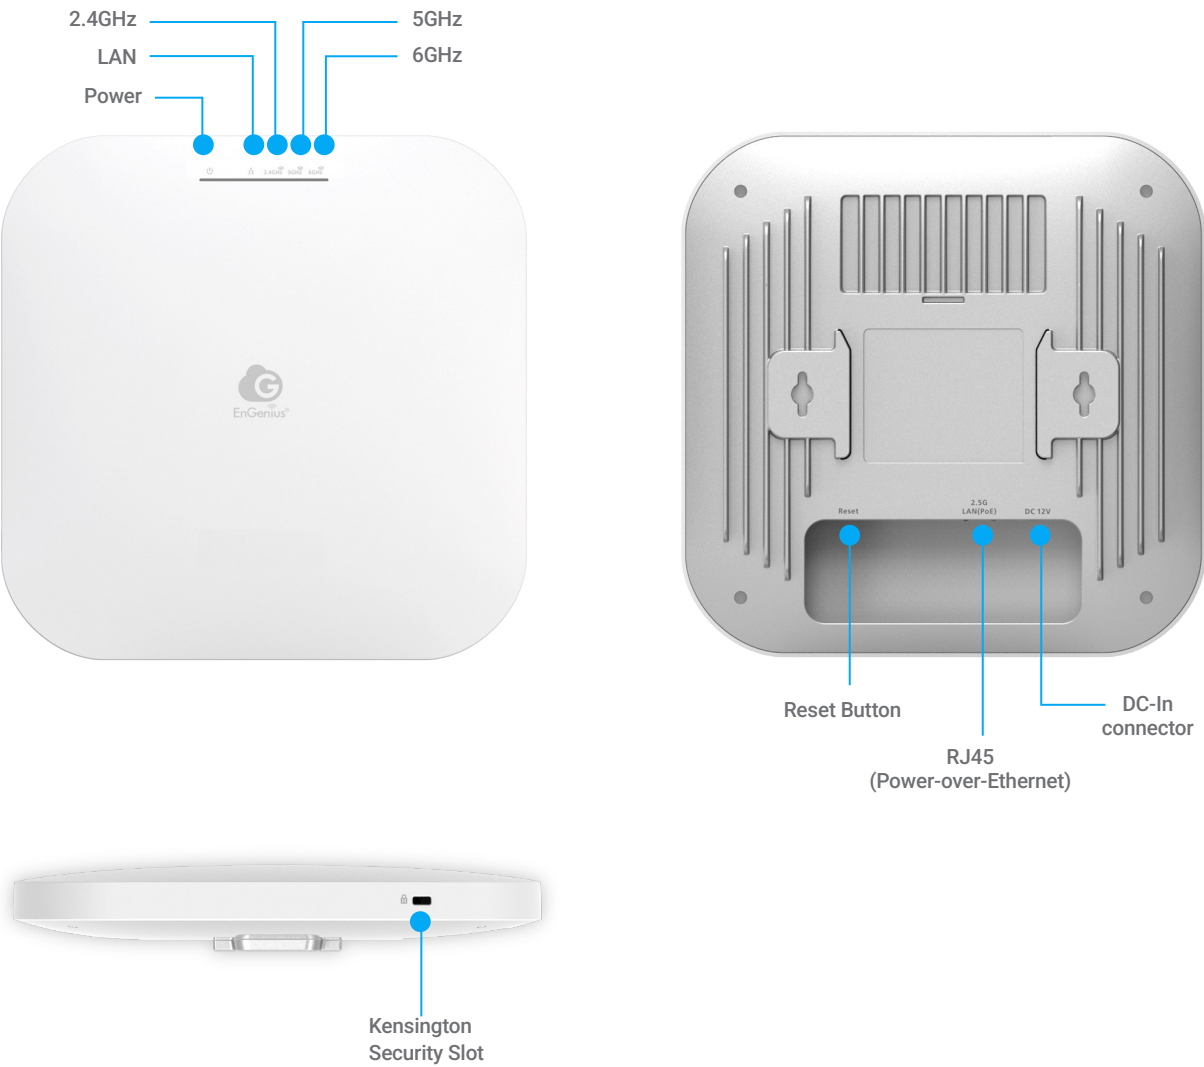


Antenna Patterns, and Product Views

Cloud7 2x2 (ECW510) Antenna Patterns


2.4GHz

H-Plane

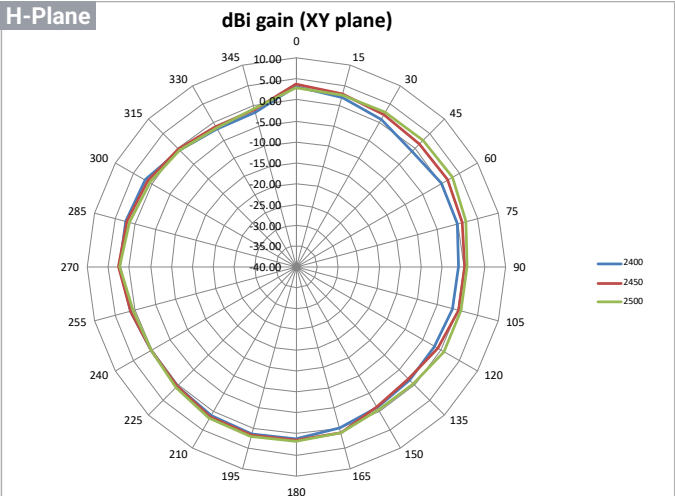


2.4GHz

E-Plane

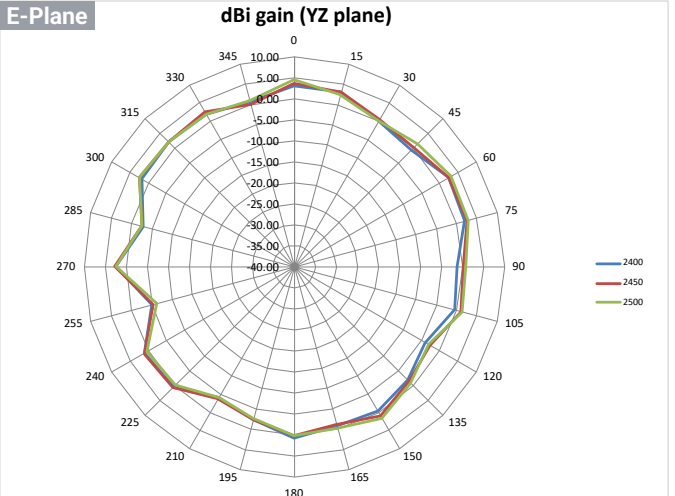


5GHz

H-Plane

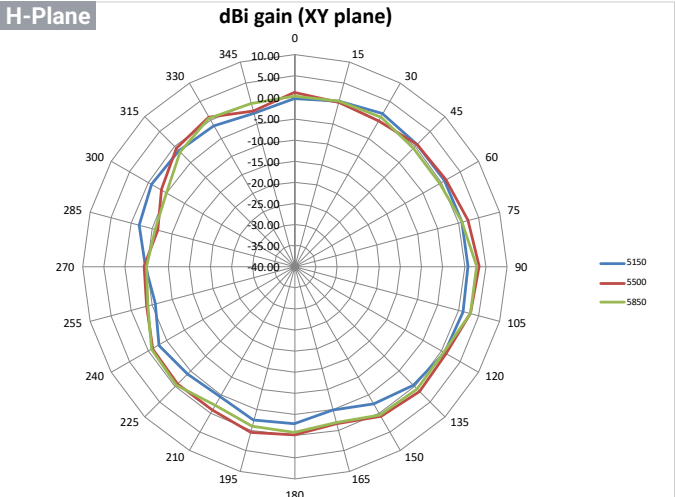


5GHz

E-Plane

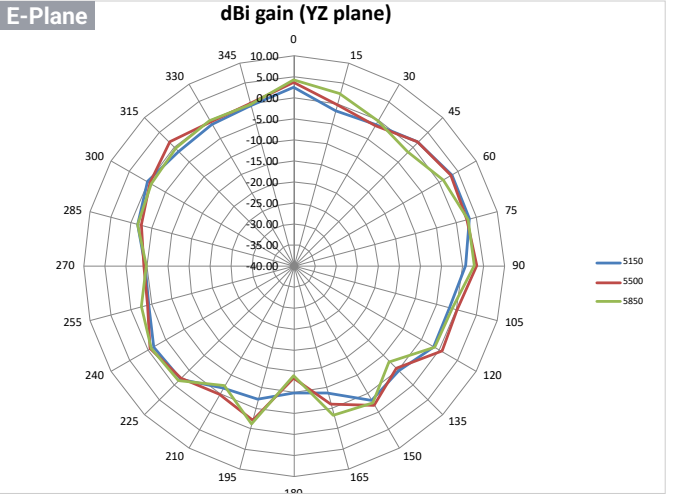

Antenna Patterns, and Product Views

Cloud7 2x2 (ECW510) Product Views

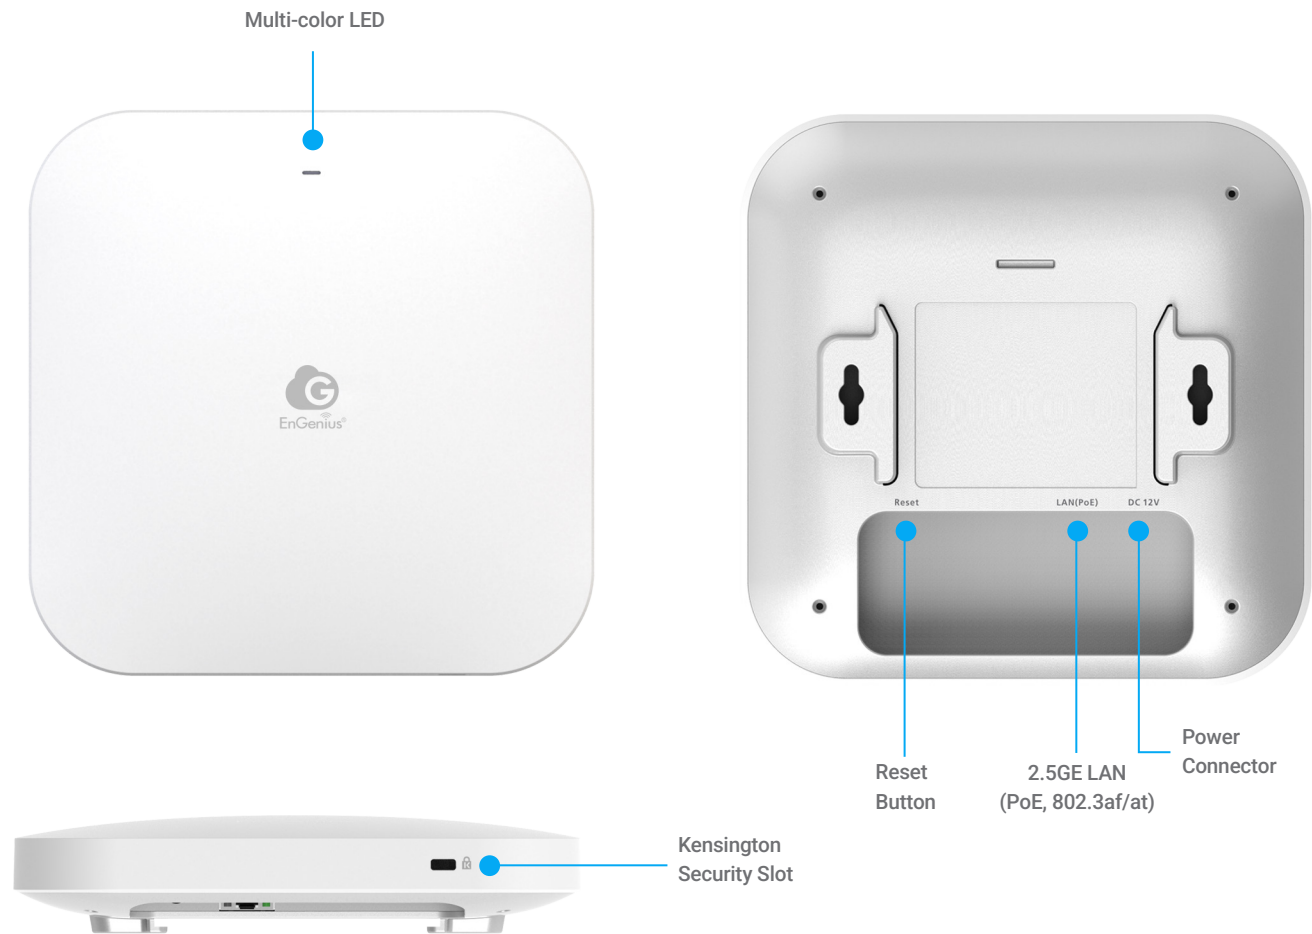


Antenna Patterns, and Product Views

Cloud7 2x2x2 (ECW520) Antenna Patterns


2.4GHz

H-Plane

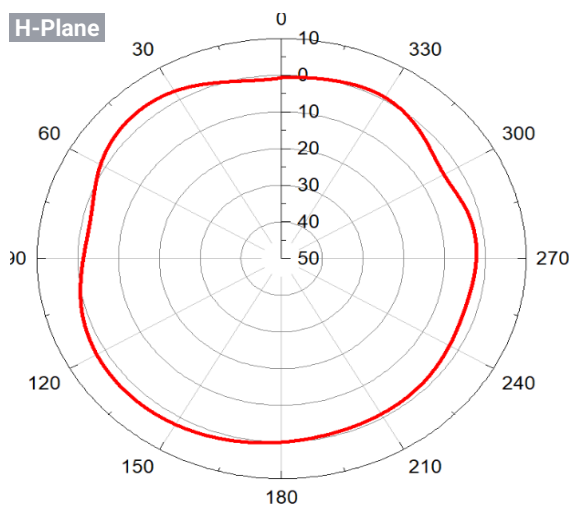


2.4GHz

E-Plane

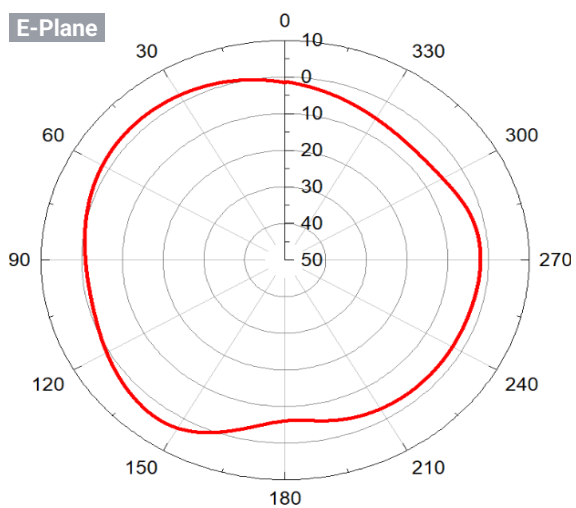


5GHz

H-Plane

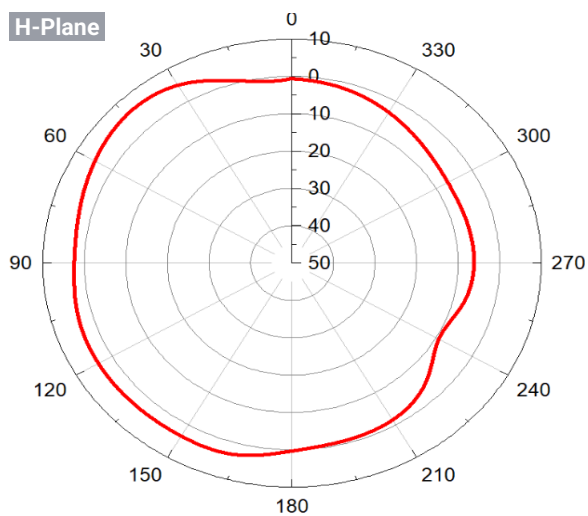


5GHz

E-Plane

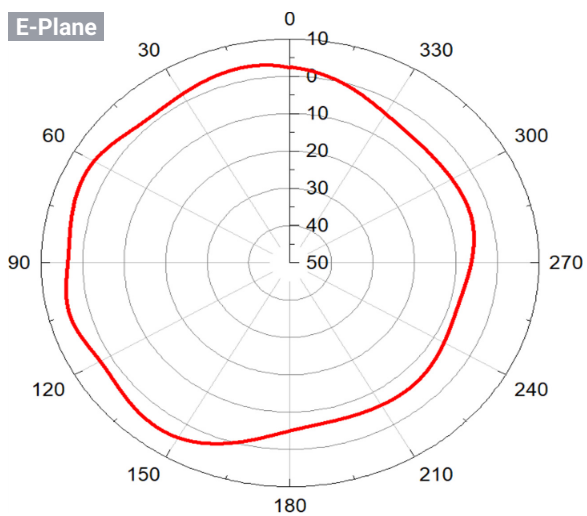


6GHz

H-Plane

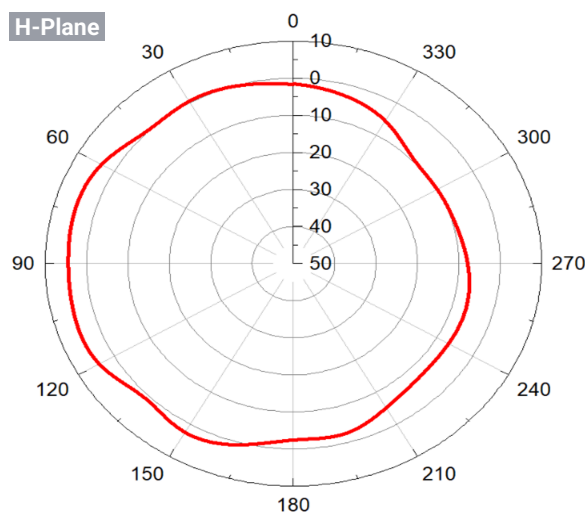


6GHz

E-Plane

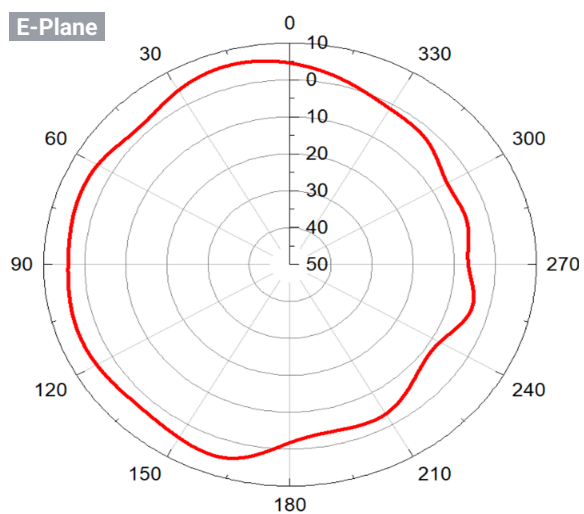

Antenna Patterns, and Product Views

Cloud7 2x2x2 (ECW520) Product Views

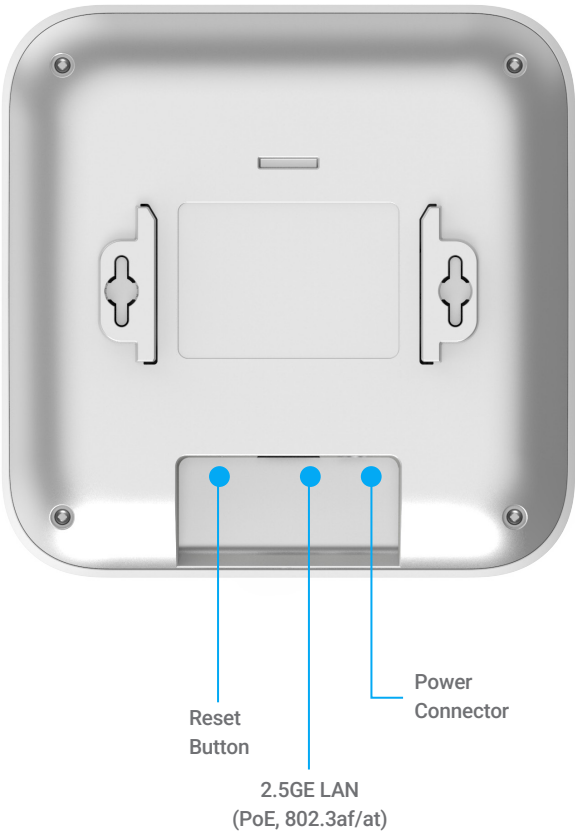


Antenna Patterns, and Product Views

Cloud7 2x2x2 (ECW526) Antenna Patterns


2.4GHz

H-Plane

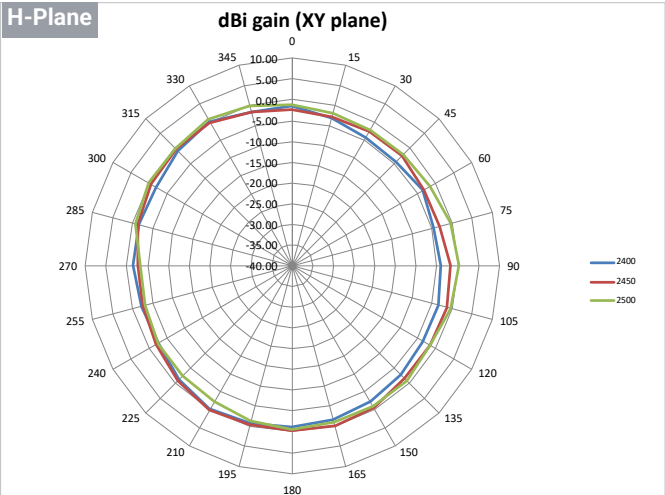


2.4GHz

E-Plane

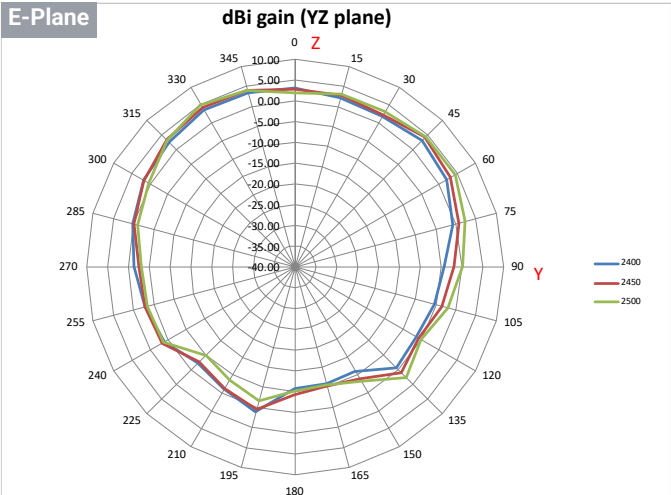


5GHz

H-Plane

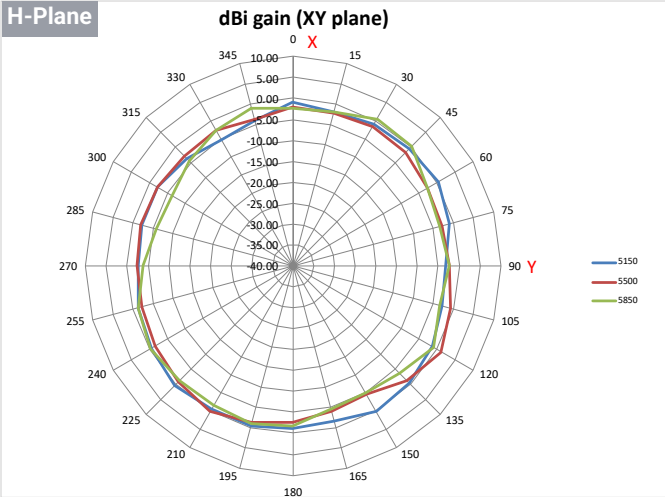


5GHz

E-Plane

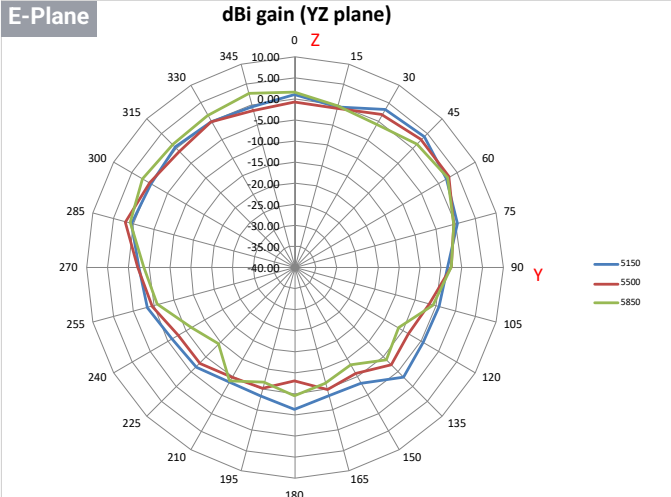


6GHz

H-Plane

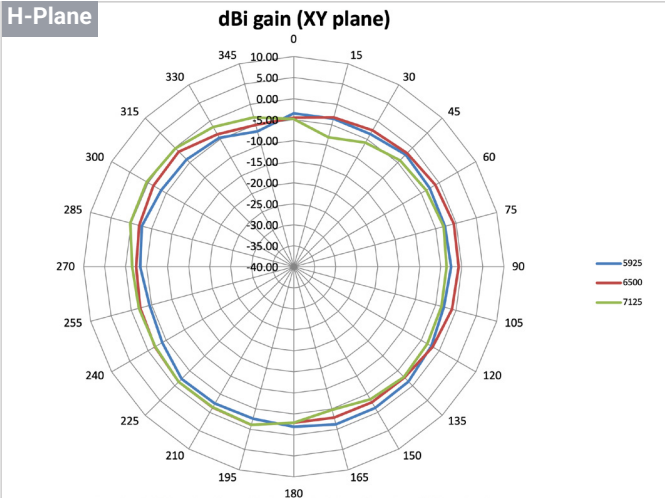


6GHz

E-Plane

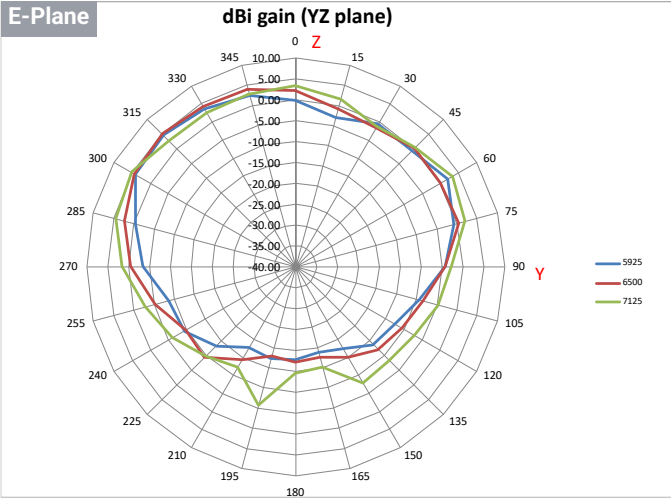

Antenna Patterns, and Product Views

Cloud7 2x2x2 (ECW526) Product Views

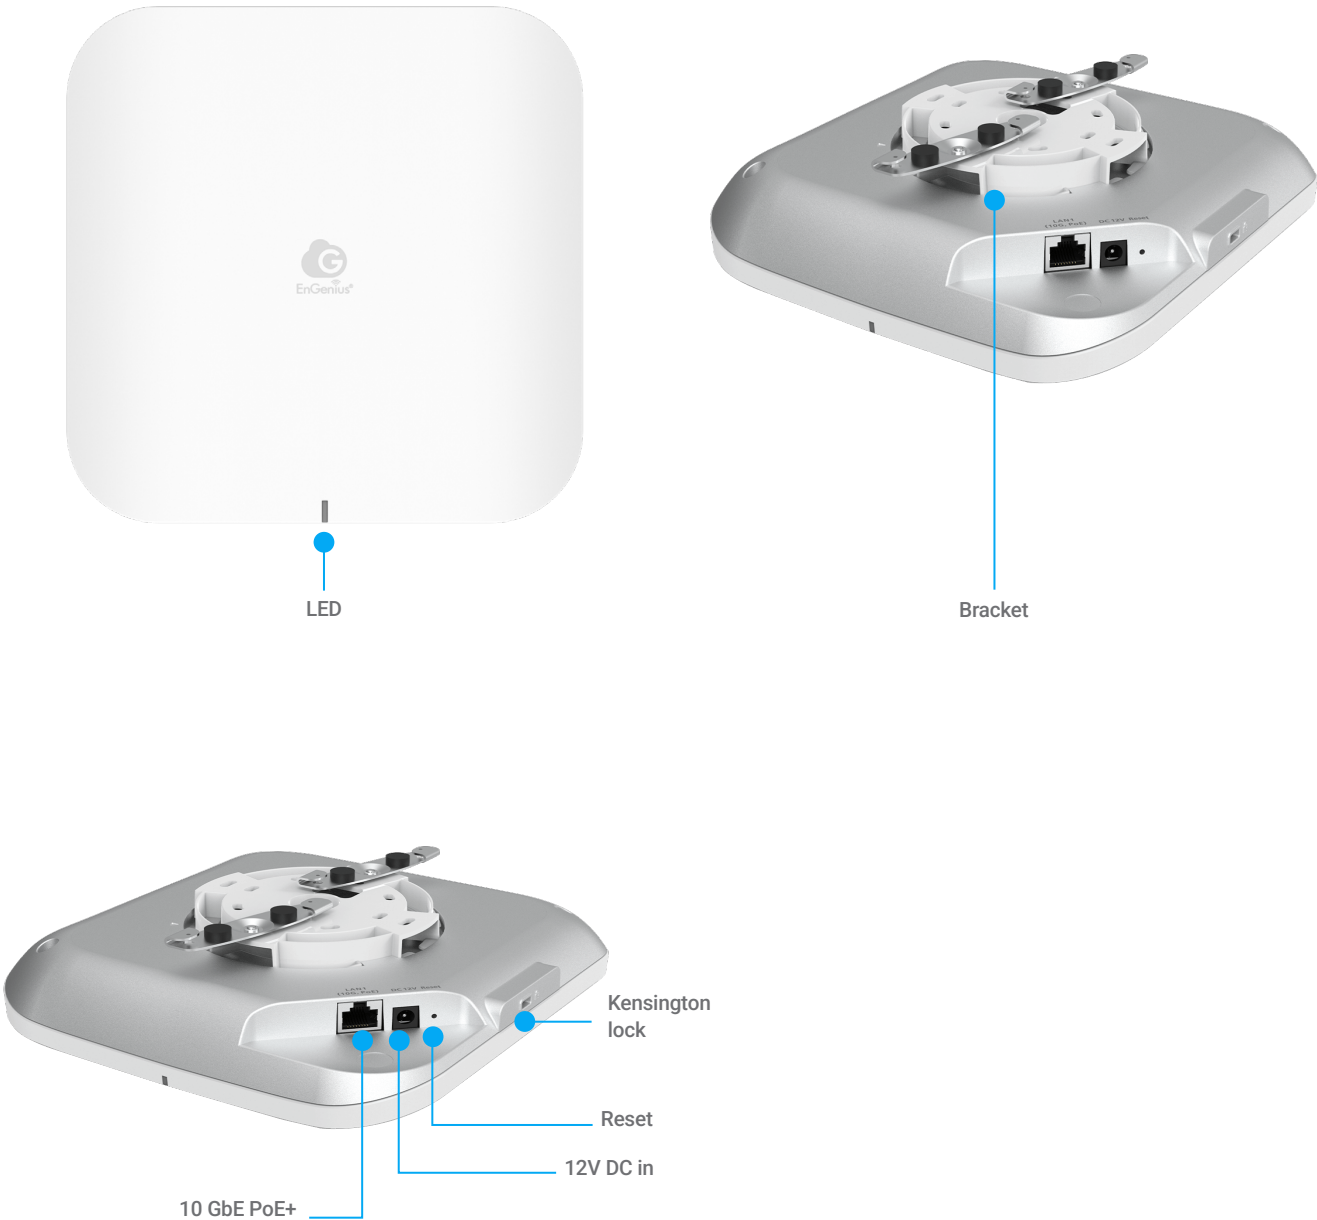


Antenna Patterns, and Product Views

Cloud7 4x4x4 (ECW536) Antenna Patterns


2.4GHz

H-Plane

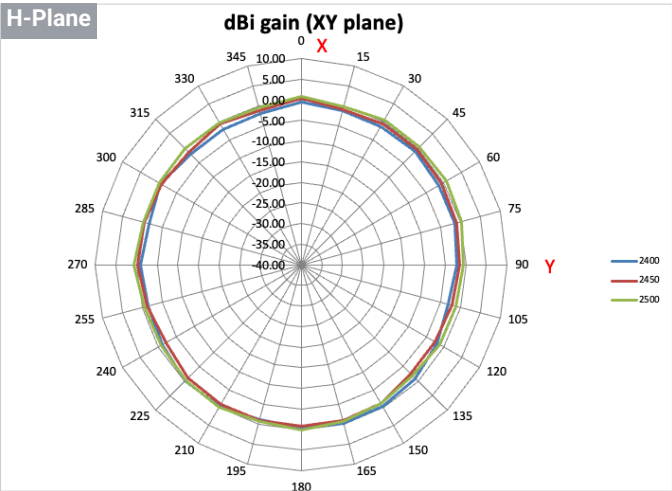


2.4GHz

E-Plane

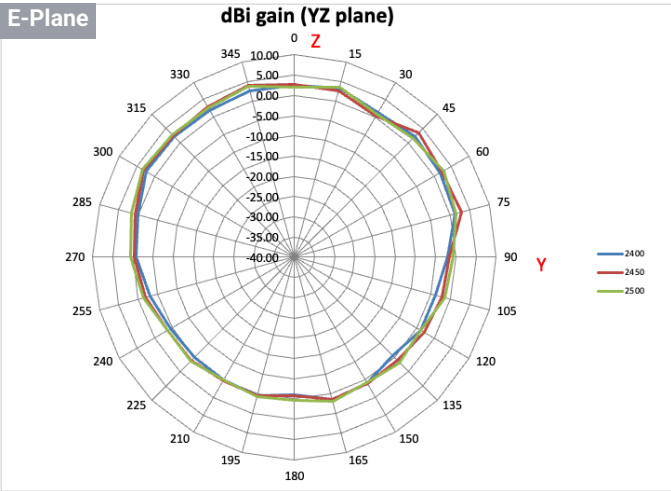


5GHz

H-Plane

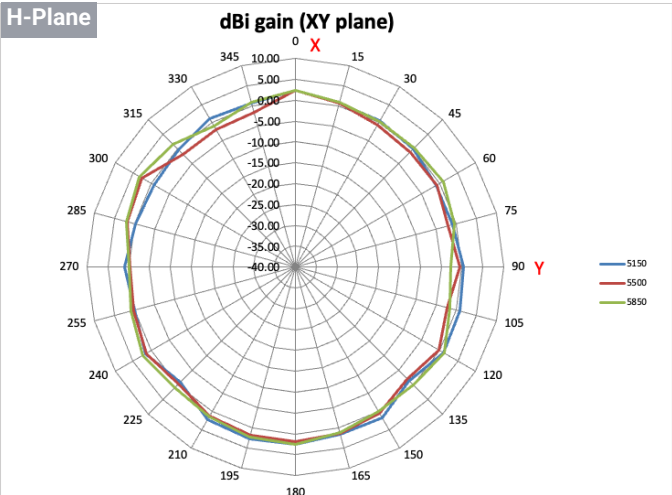


5GHz

E-Plane

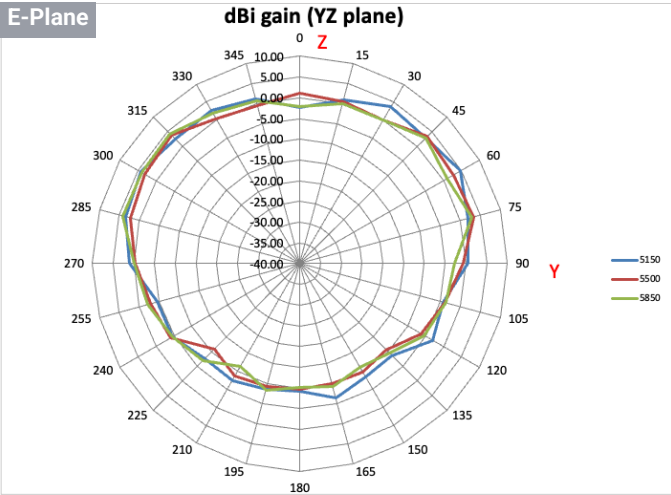


6GHz

H-Plane

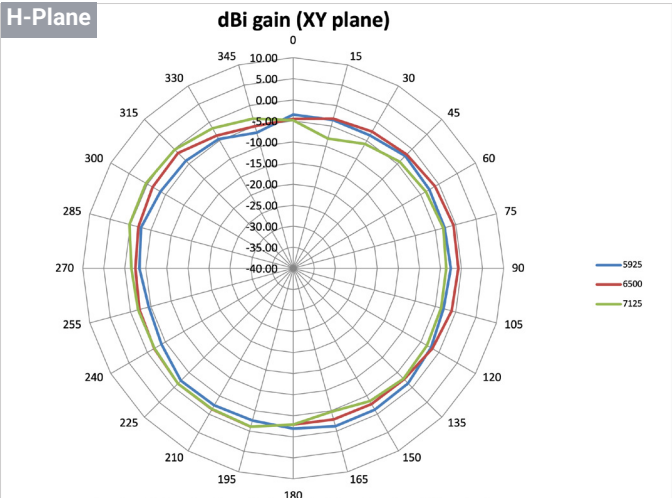


6GHz

E-Plane

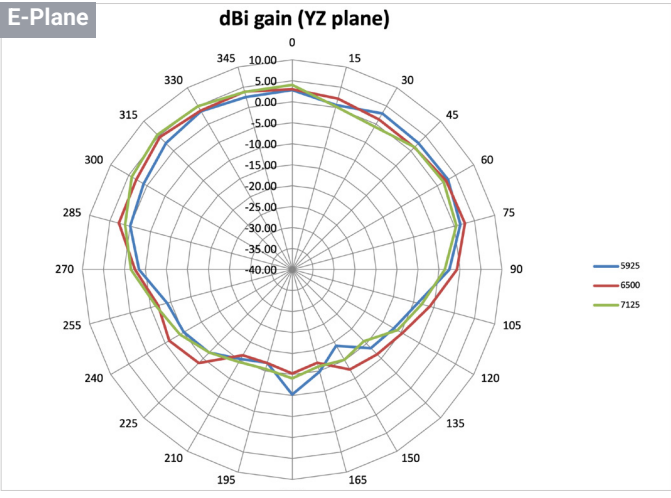

Antenna Patterns, and Product Views

Cloud7 4x4x4 (ECW536) Product Views

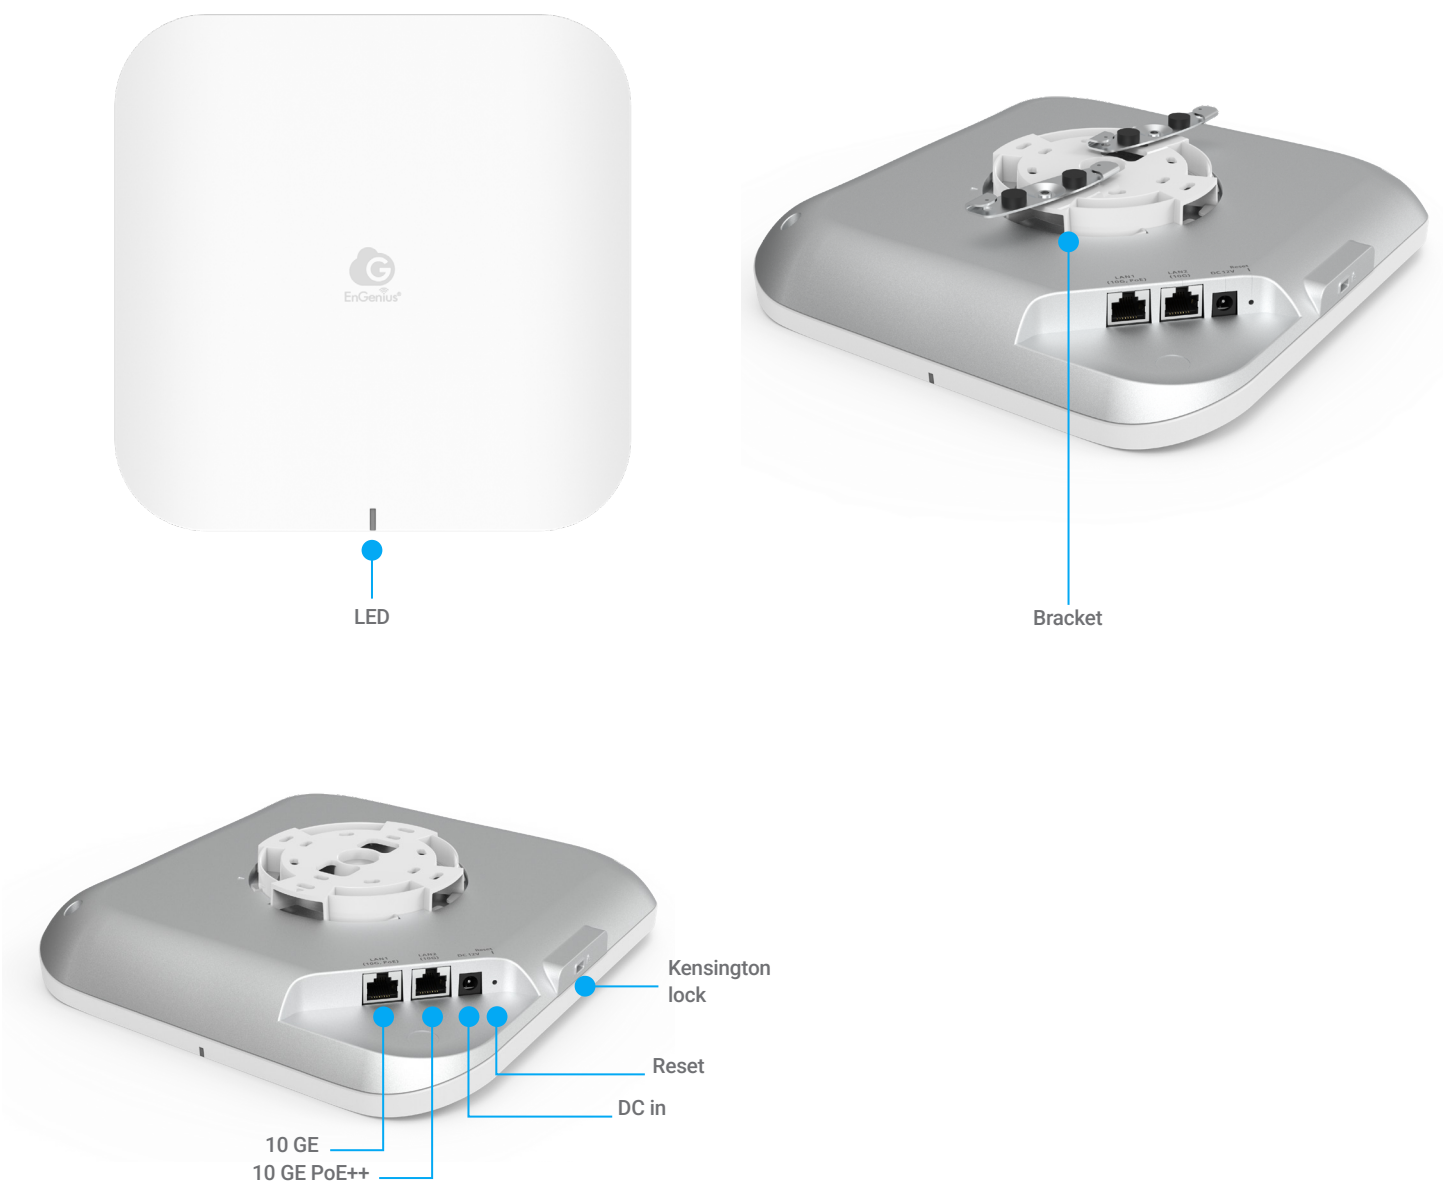


Antenna Patterns, and Product Views

Cloud7 4x4x4 S (ECW536S) Antenna Patterns


2.4GHz

H-Plane

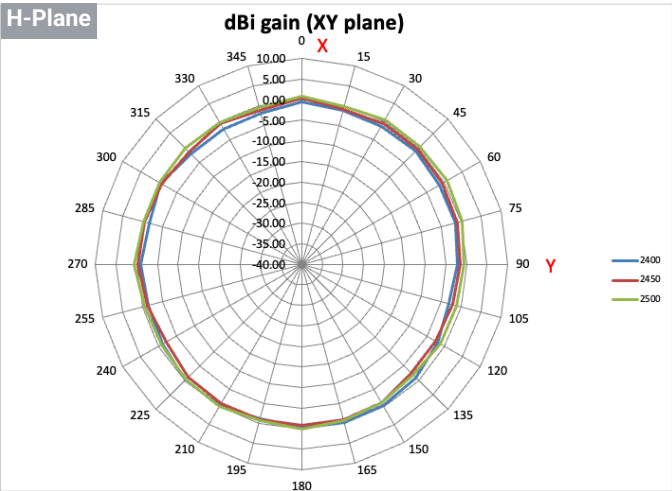


2.4GHz

E-Plane

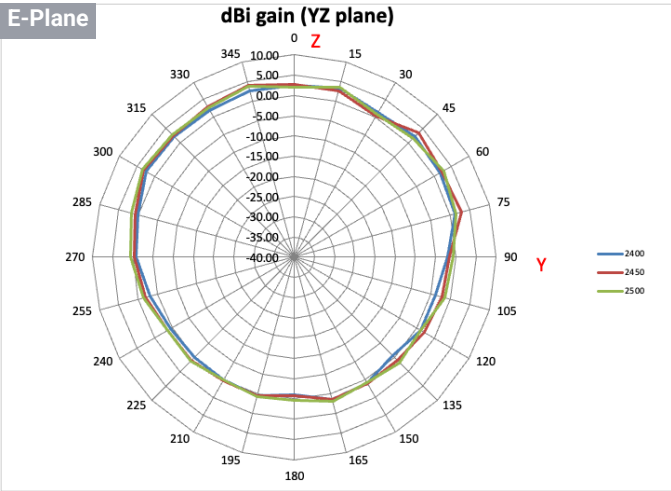


5GHz

H-Plane

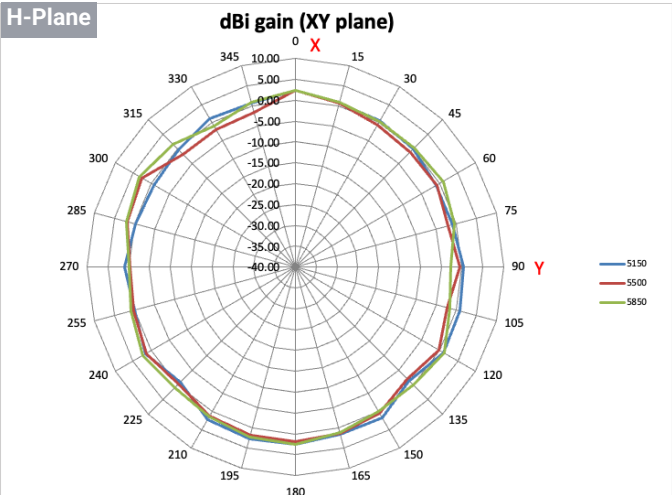


5GHz

E-Plane

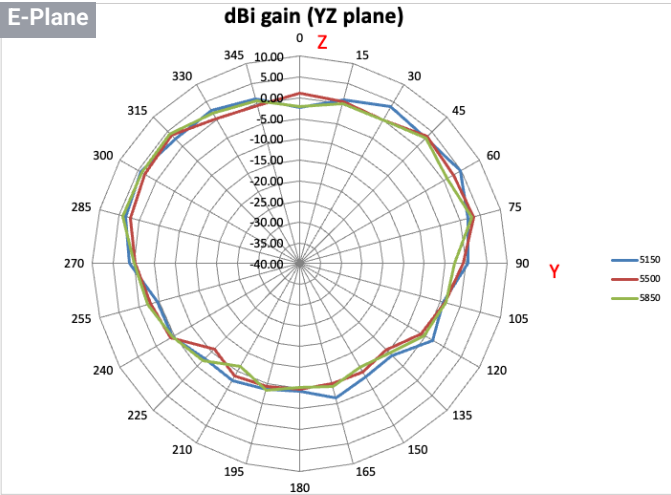


6GHz

H-Plane

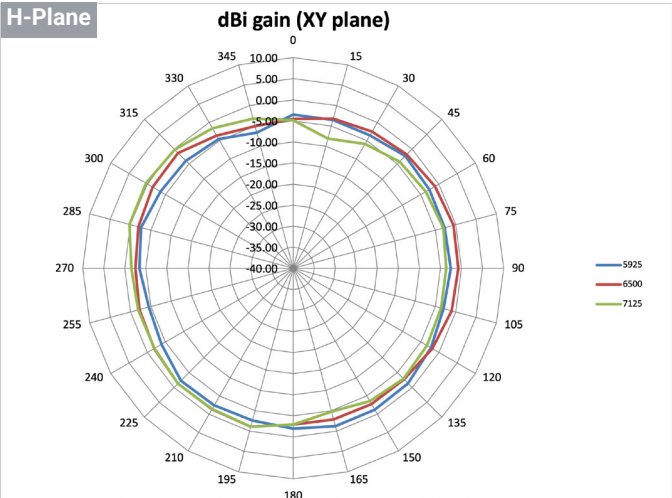


6GHz

E-Plane

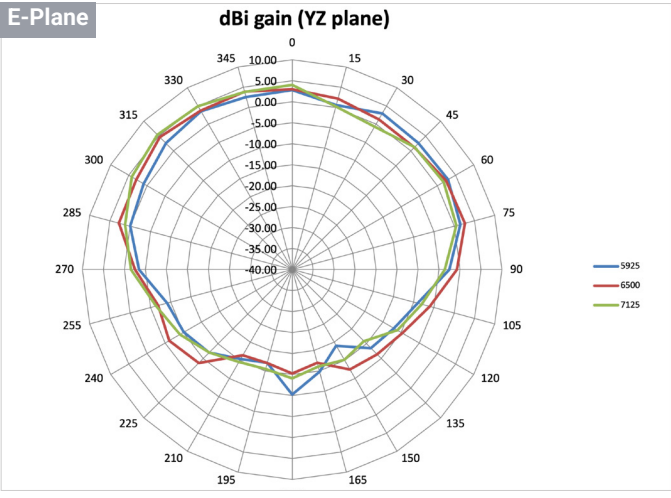

Antenna Patterns, and Product Views

Cloud7 4x4x4 S (ECW536S) Product Views

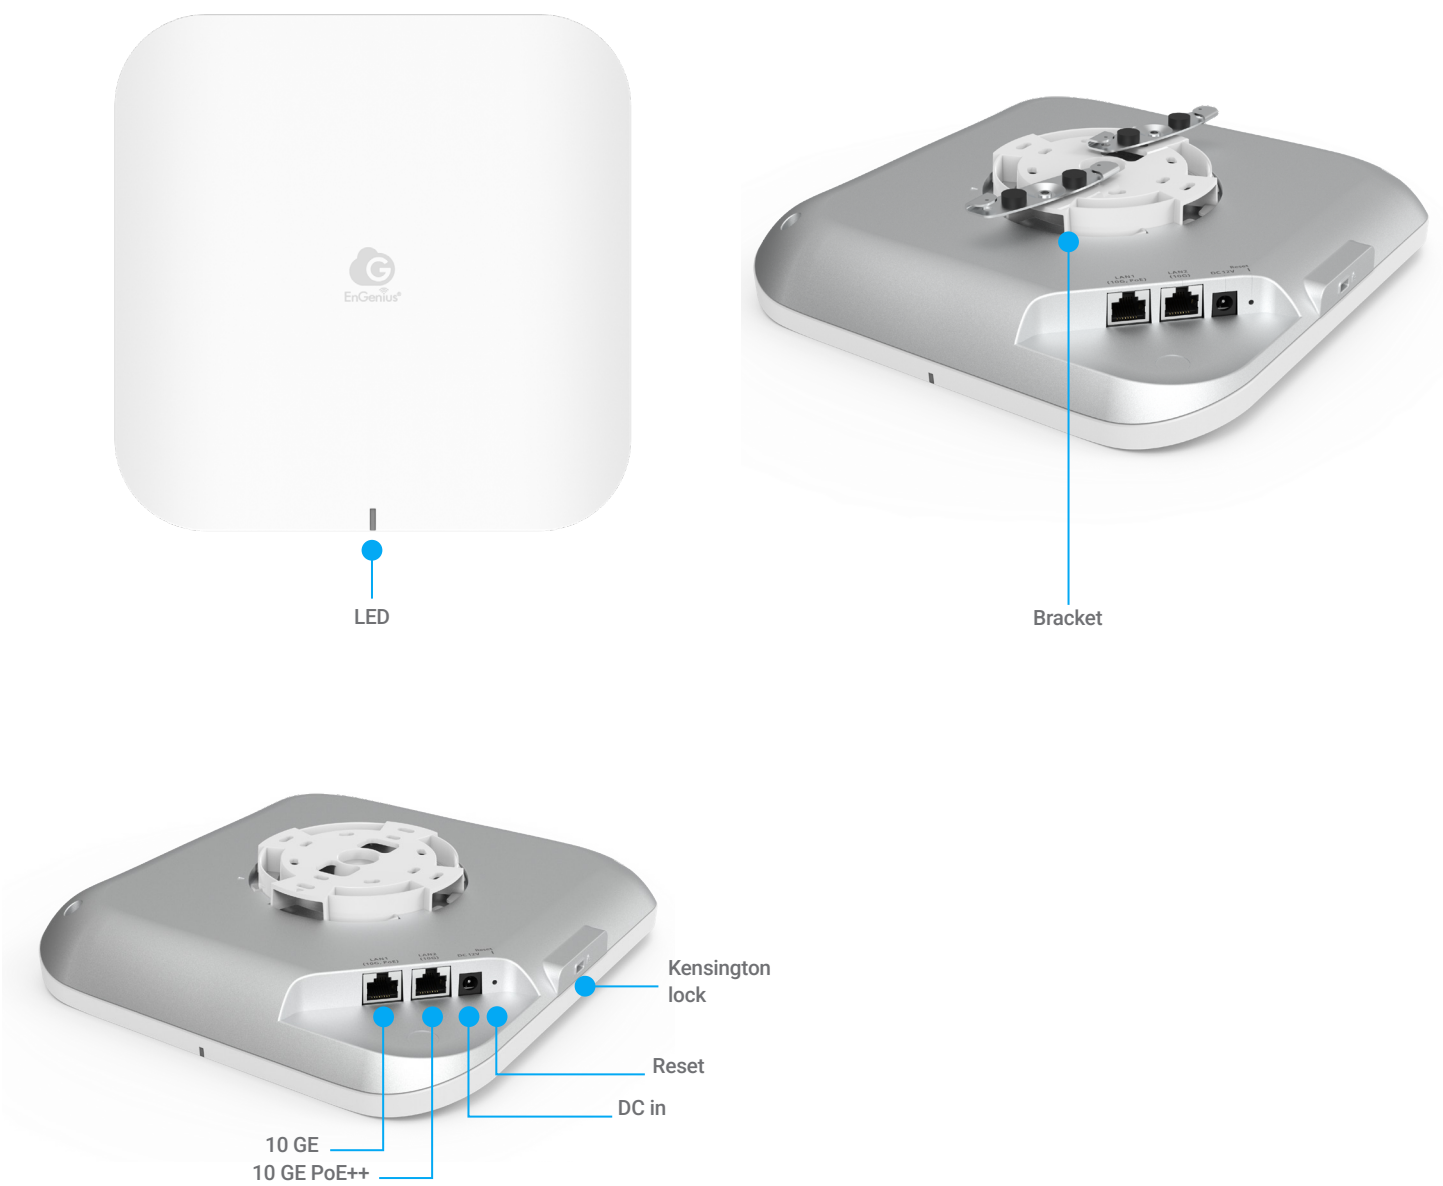


Antenna Patterns, and Product Views

Cloud5 2x2 Outdoor (ECW160) Antenna Patterns


2.4GHz

H-Plane

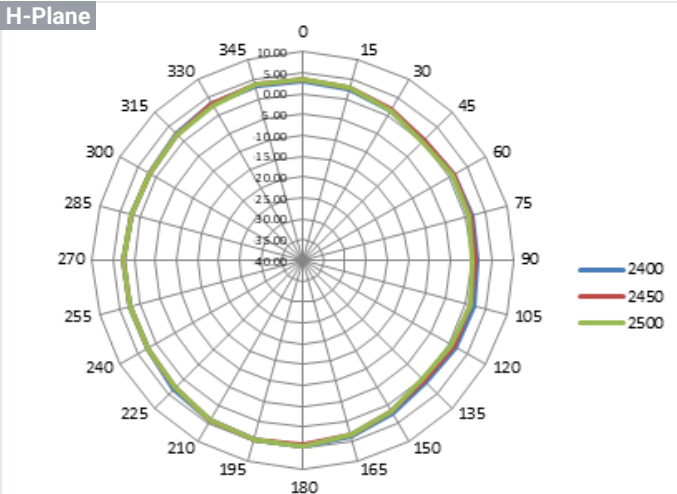


2.4GHz

E-Plane

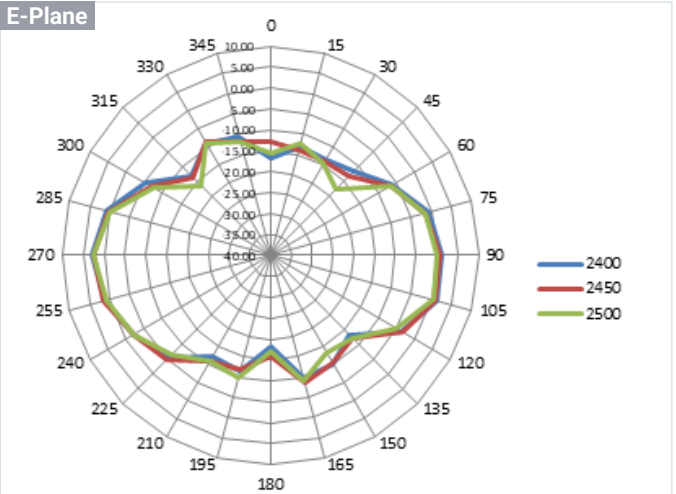


5GHz

H-Plane

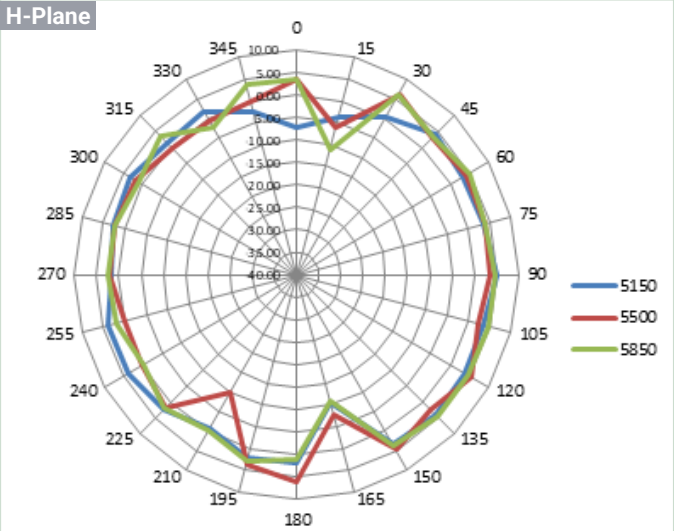


5GHz

E-Plane

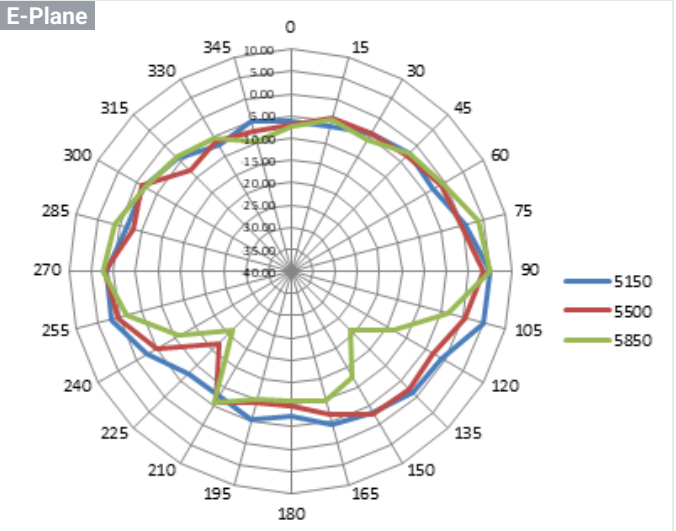

Antenna Patterns, and Product Views

Cloud5 2x2 Outdoor (ECW160) Product Views

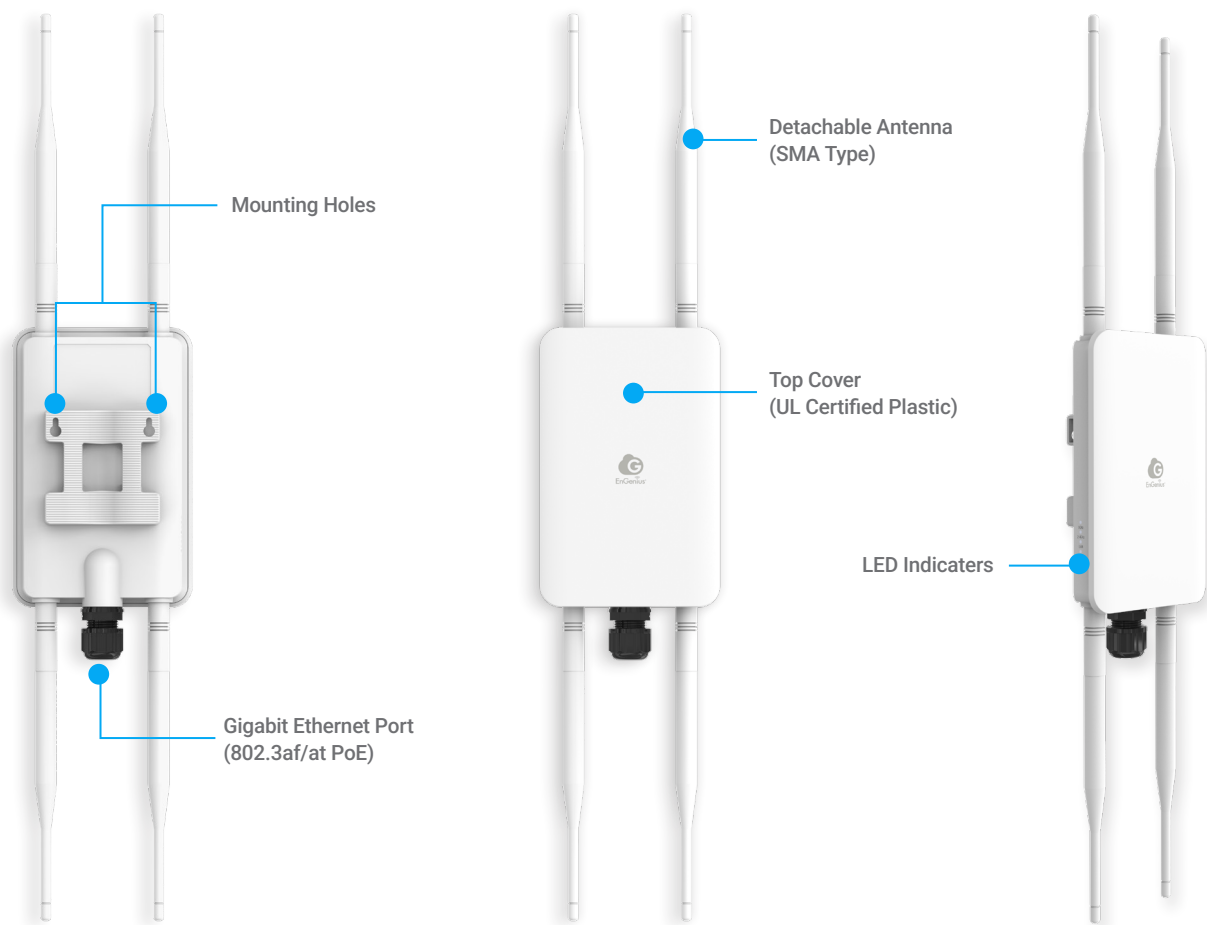


Antenna Patterns, and Product Views

Cloud6 2x2 Outdoor (ECW260) Antenna Patterns


2.4GHz

H-Plane

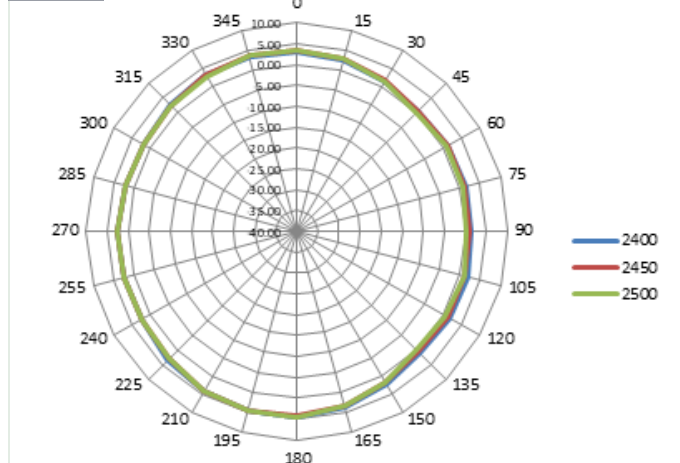


2.4GHz

E-Plane

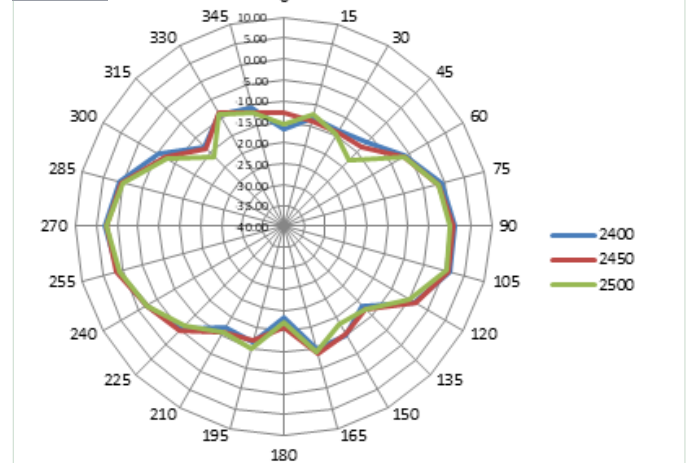


5GHz

H-Plane

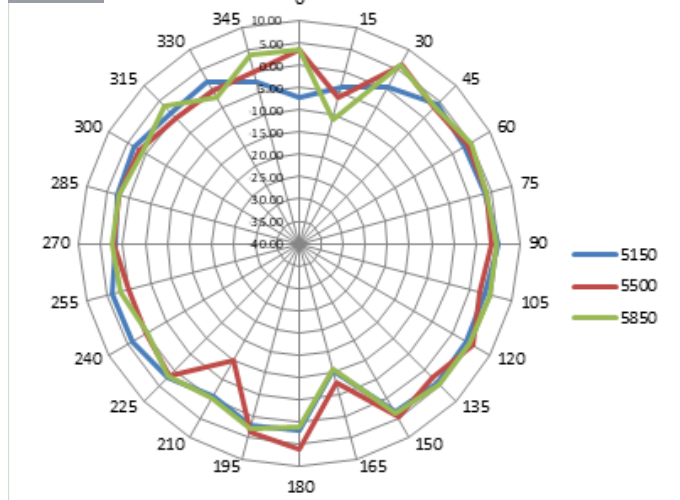


5GHz

E-Plane

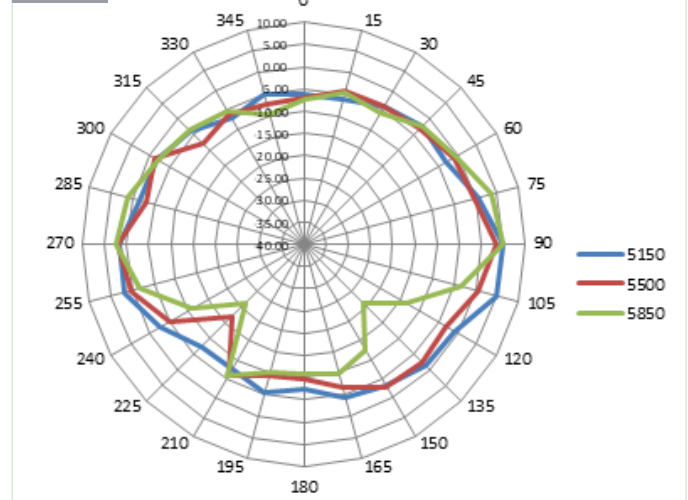

Antenna Patterns, and Product Views

Cloud6 2x2 Outdoor (ECW260) Product Views

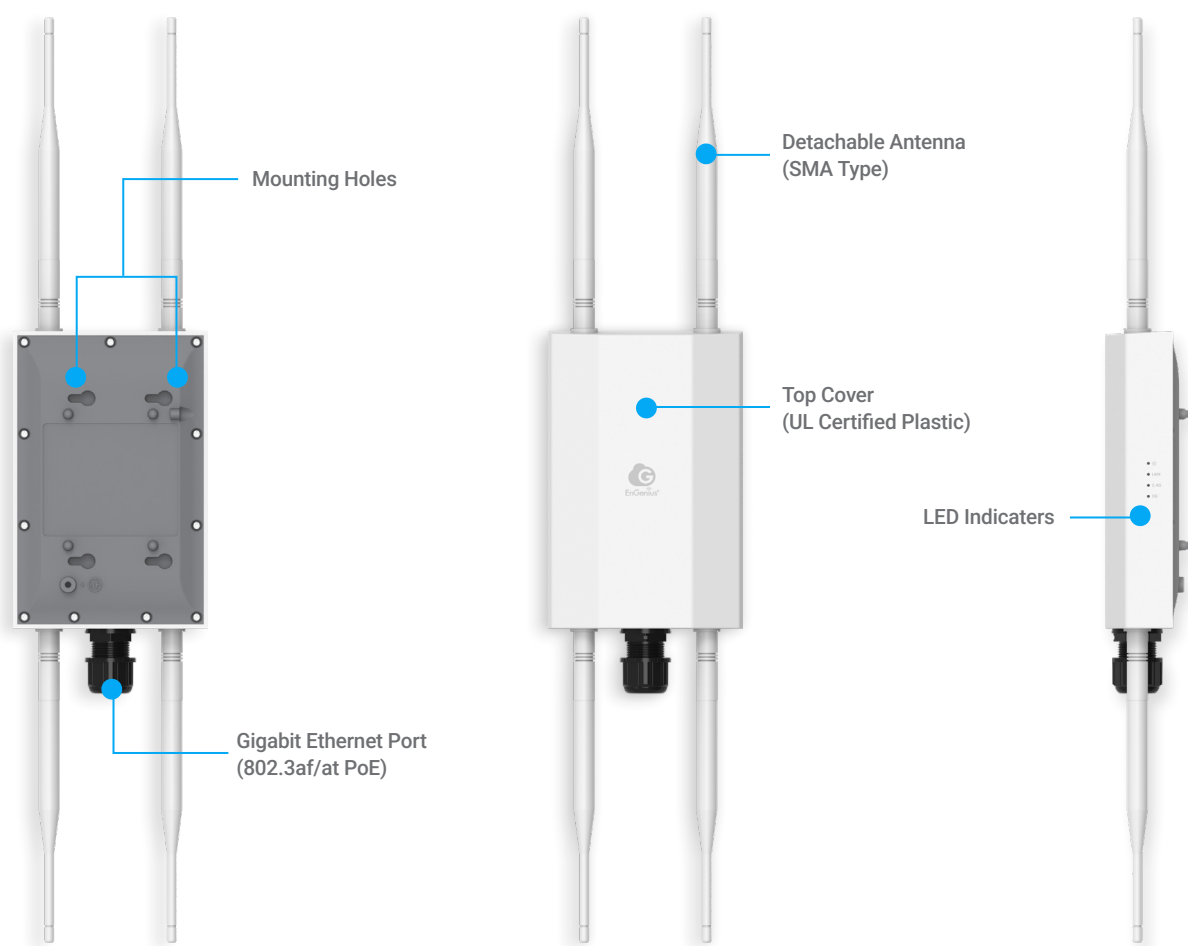


Antenna Patterns, and Product Views

Cloud6 4x4 Outdoor (ECW270) Antenna Patterns


2.4GHz

H-Plane

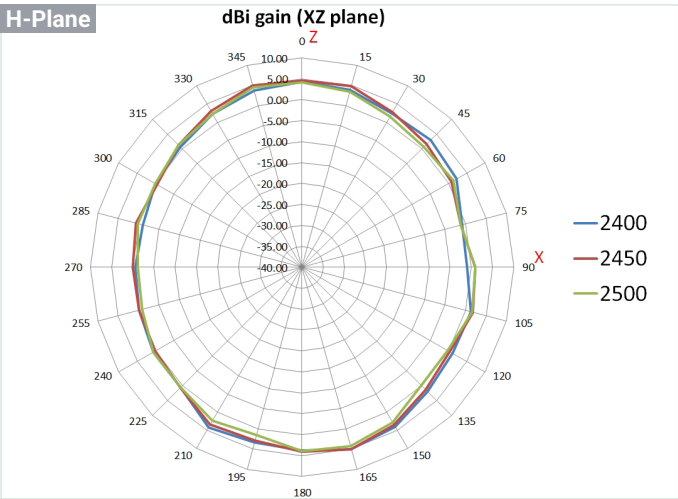


2.4GHz

E-Plane

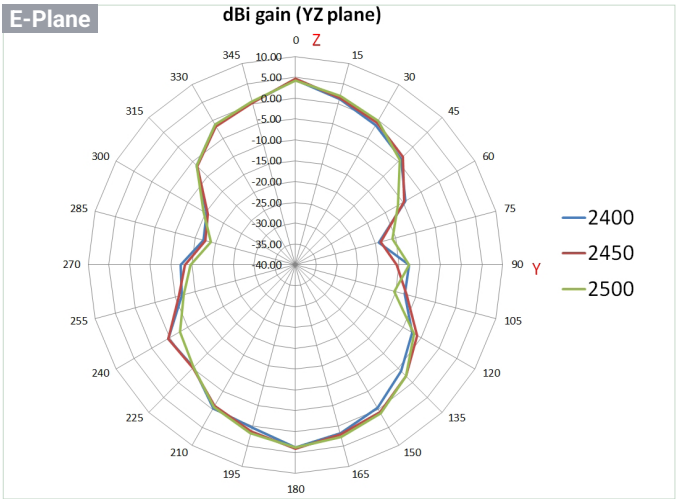


5GHz

H-Plane

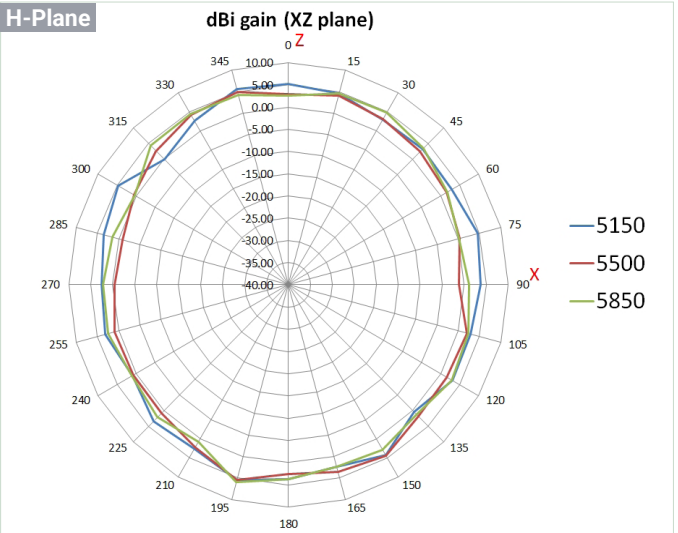


5GHz

E-Plane

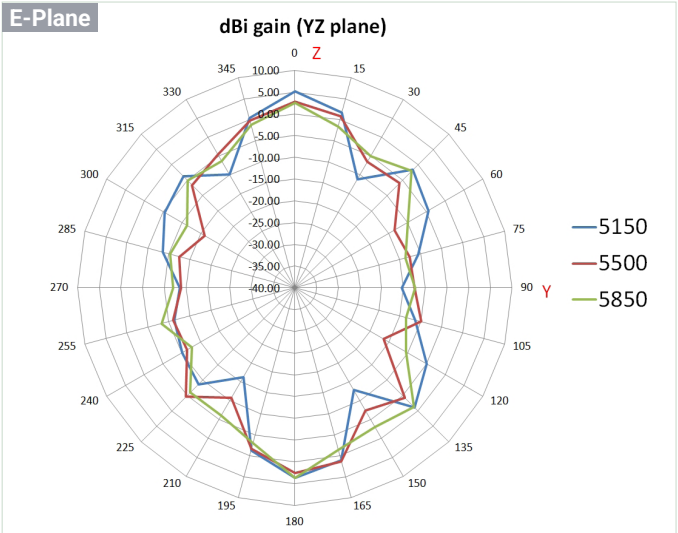

Antenna Patterns, and Product Views

Cloud6 4x4 Outdoor (ECW270) Product Views

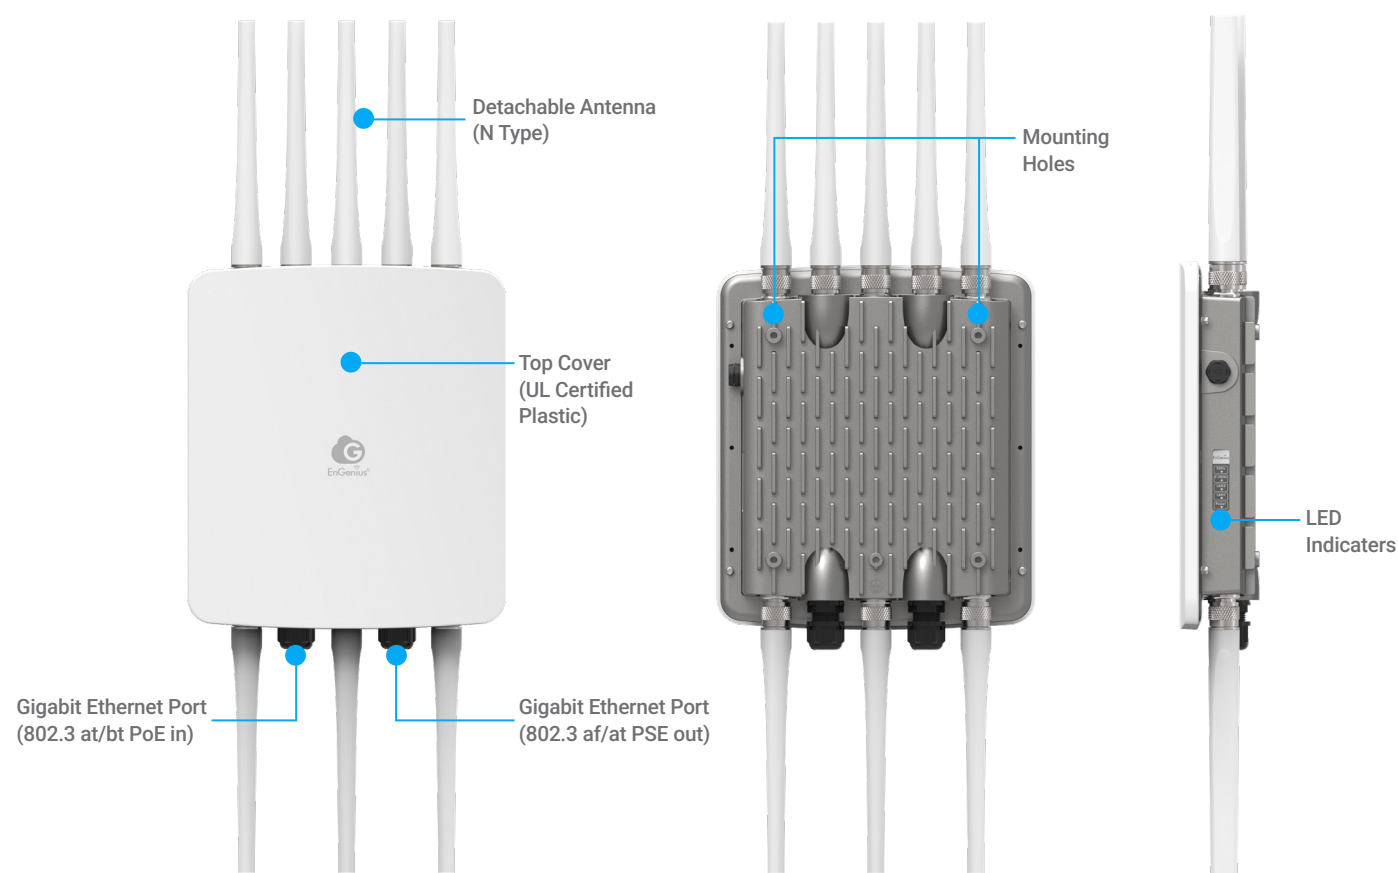

*Make sure use 60W PoE power when PSE out is in use

Plug & Play with Zero Configuration



EnGenius Technologies | California, USA | Ontario, Canada

Email: support@engeniustech.com

Website: www.engeniustech.com

Local contact (USA): (+1) 714 432 8668

Local contact (Canada): (+1) 905 940 8181

EnGenius Networks Europe B.V. | Eindhoven, Netherlands

Email: support@engeniustech.com

Website: www.engeniustech.com/eu

Local contact: (+31) 40 8200 887

恩碩科技股份有限公司 | Taiwan, R.O.C.

Email: sales@engeniustech.com.tw

Website: www.engeniustech.com/tw

Local contact: (+886) 933 250 628

EnGenius Networks Japan 株式会社 | Tokyo, Japan

Email: jp.support@engeniustech.com

Website: www.engeniustech.com/jp

Local contact: (+81) 3 6809 6608

EnGenius Networks Singapore Pte Ltd. | Singapore

Email: techsupport-sg@engeniustech.com

Website: www.engeniustech.com/apac

Local contact: (+65) 6227 1088

EnGenius Networks Private Limited | Hyderabad, India

Email: indiasales@engeniustech.com

Website: www.engeniustech.com/in/

Local contact: (+91) 9845514455

EnGenius Networks Dubai | Dubai, UAE

Email: support-me@engeniustech.com

Website: www.engeniustech.com/apac

Local contact: (+971) 4 339 1227

EnGenius®